

PM 31 60061-35

1 of 4

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

AUG - 4 1989

Kop Coat, Inc.
436 Seventh Avenue, Suite 1850
Pittsburgh, PA 15219

Attention: Alan S. Ross

Gentlemen:

Subject: Vinelast Antifouling
EPA Registration No. 3073-5
Your Submission Dated October 17, 1988
EPA Received Date October 19, 1988

The labeling referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, is acceptable subject to the comments listed below. Five (5) copies of the finished labeling must be submitted.

1. Under Statement of Practical Treatment - If Swallowed, change the phrase "Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available" to "Drink a large quantity of water."
2. Submit a revised updated Confidential Statement of Formula for this product. If you use 95% Cuprous Oxide for source product then the percent by weight of 95% Cuprous oxide should be 44.3% so that the label may declare 42% Cuprous Oxide.
3. Delete the phrase "General Description."

The ingredient statement in the revised label agrees with the last accepted label. Please submit five (5) copies of the finished labeling.

57038:I:Dutch:LL-10:KENCO:07/25/89:08/04/89:aw:gj:vo:ek:dg

CONCURRENCES

SYMBOL	HT-704-C						
SURNAME	V. Dutch						
DATE	18-4-89						


2044
-2-

Should you have any further questions, please contact Veronica Dutch
at (703) 557-6938.



John H. Lee
Product Manager (31)
Antimicrobial Program Branch
Registration Division (H7505C)

Woolsey®

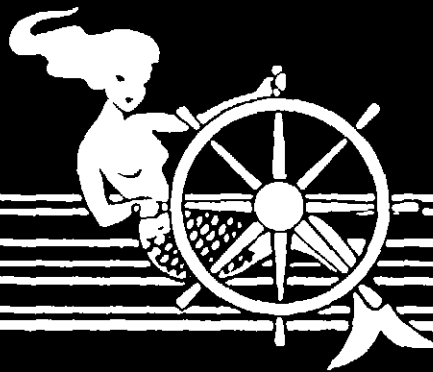

VINELAST
Anti-Fouling Finish
734 Permanent Blue

WARNING: CAUSE OF IRRITATION. PAINFUL IF ABSORBED
THROUGH SKIN. MAY BE HARMFUL IF SWALLOWED OR INHALED.
SEE PRECAUTIONS ON CONTAINER FOR FURTHER DETAILS.
NET WT. (CARBON) 3.33 LBS.

VINELAST Anti-Fouling Finish

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING

Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. Do not breathe sarding dust or vapor. Wear a mask or respirator jointly approved by the Mine Safety and Health Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Drink promptly a large quantity of milk, egg-whites, gelatin solution or if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.
IF IN EYES: Flush with plenty of water. Get medical attention.
IF ON SKIN: Wash with plenty of soap and water. Get medical attention.
IF INHALED: Remove victim to fresh air. First breathing give artificial respiration if necessary. Mouth-to-mouth. Get medical attention.

ENVIRONMENTAL HAZARD

This material is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment and disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved land.

PHYSICAL OR CHEMICAL HAZARD

COMBUSTIBLE: Do not use or store near heat or open flame.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling. NOTE: When product is used in confined areas or applied by spraying, wear a respirator jointly approved by the Mine Safety and Health Administration, formerly the U.S. Bureau of Mines, and by the National Institute for Occupational Safety and Health under the provisions of 30 CFR.

WARRANTY: We guarantee this material to comply with our published specifications. We make no warranty, representation or liability for its handling, use, storage, the results obtained or any injury or damage of any nature resulting therefrom.

Mfg. by WOOLSEY MARINE Div. of KOP-COAT, Newark, NJ 07114

Made in USA

PREPARATION: If previously painted with Vinalant, Vinelast, or Super Vinelast, apply Vinelast directly after proper surface preparation, i.e., a thorough wet sanding and removal of all old paint. If otherwise, completely remove old finishes and prepare the bare surface as follows:

WOOD: Peel out and remove sealers, varnishes and the routed beards using Vinelast thinned 10% with Woolsey 719 solvent. Apply a priming coat of Vinelast thinned 10% with 719 solvent. Then apply a finish coat of Vinelast at least 2, preferably 3 coats of Vinelast.

METAL: Prime aluminum or steel with Woolsey vinyl system consisting of 652-651 Epoxy Primer following directions for these special products. Alternate system: Prime with 3 coats Woolsey 648-649 MFP Epoxy Primer. Finish with at least 2, preferably 3 coats of Vinelast.

FIBERGLASS: Sand and scrub with Woolsey Shopmate 625 Heavy Duty Fiberglass Cleaner or other strong abrasive agent. Rinse well with fresh water and allow to dry. Sand vigorously until all the old finish has been removed. Use 100 to 80 grit product in paper with wet lay to finish with a fine. Apply at least 3 coats of primer with 1 coat of 652-651 MFP Epoxy Primer. Finish with at least 2, preferably 3 coats of Vinelast.

APPLICATION: Mix well before use. Apply with brush or spray.

THINNING: Thin as indicated for use as indicated, except when using as a primer coat. Use Woolsey 719 solvent for thinning. Do not thin more than 10%.

COVERAGE: Apply in 1/4 inch strokes. Do not mix old and new paint. Mix old and new paint in 1/4 inch strokes. Do not mix old and new paint.

NUMBER OF COATS: At least 2 coats are required. The better the surface preparation, the fewer coats are required. Apply at least 4 coats of Vinelast on bare metal. All of these coats should be applied in 1/4 inch strokes.

LAUNCHING: Allow the finish to cure for at least 24 hours before launching. Epoxy Primer and 652-651 MFP Epoxy Primer should be used for launching.

GENERAL DESCRIPTION

VINELAST: This is a two-part system consisting of a primer and a finish coat. The primer is a two-part system consisting of a primer and a finish coat. The finish coat is a two-part system consisting of a primer and a finish coat.

VINELAST: This is a two-part system consisting of a primer and a finish coat. The primer is a two-part system consisting of a primer and a finish coat. The finish coat is a two-part system consisting of a primer and a finish coat.

VINELAST: This is a two-part system consisting of a primer and a finish coat. The primer is a two-part system consisting of a primer and a finish coat. The finish coat is a two-part system consisting of a primer and a finish coat.

VINELAST: This is a two-part system consisting of a primer and a finish coat. The primer is a two-part system consisting of a primer and a finish coat. The finish coat is a two-part system consisting of a primer and a finish coat.

STORAGE AND DISPOSAL

STORAGE: Keep in original container and upright to prevent leakage. Keep in a cool, dry place. Do not use if the container is damaged or if the contents are contaminated. Do not use if the container is damaged or if the contents are contaminated.

PESTICIDE DISPOSAL: This is a two-part system consisting of a primer and a finish coat. The primer is a two-part system consisting of a primer and a finish coat. The finish coat is a two-part system consisting of a primer and a finish coat.

CONTAINER DISPOSAL: This is a two-part system consisting of a primer and a finish coat. The primer is a two-part system consisting of a primer and a finish coat. The finish coat is a two-part system consisting of a primer and a finish coat.