

CAUTION: Keep out of the reach of children.
See additional cautions on back label.

ACTIVE INGREDIENT: Copper Oxide 24%
INERT INGREDIENTS: 76%

WOOLSEY[®]

YACHT

1 GAL. (U.S.)
5/6 GAL. (IMPL.)

AN ANTI-FOULING
COMPOSITION PAINT
FOR PROTECTION OF
WOODEN BOAT BOTTOMS




HIGHLY PROTECTIVE
AGAINST BARNACLES,
BORERS, SEAWEEDS,
AND MARINE GROWTHS

701

COMPOSITION BY WEIGHT

Copper Oxide	24%
Red Iron Oxide C.P.	18%
Zinc Oxide	4%
Silicates	7%
Rosin, Pine Tar	2%
Petroleum Thinners	16%
Aromatic Hydrocarbons	18%
	100%

Copper Expressed as Metallic 19%
U.S.D.A. Registration No. 3073-10

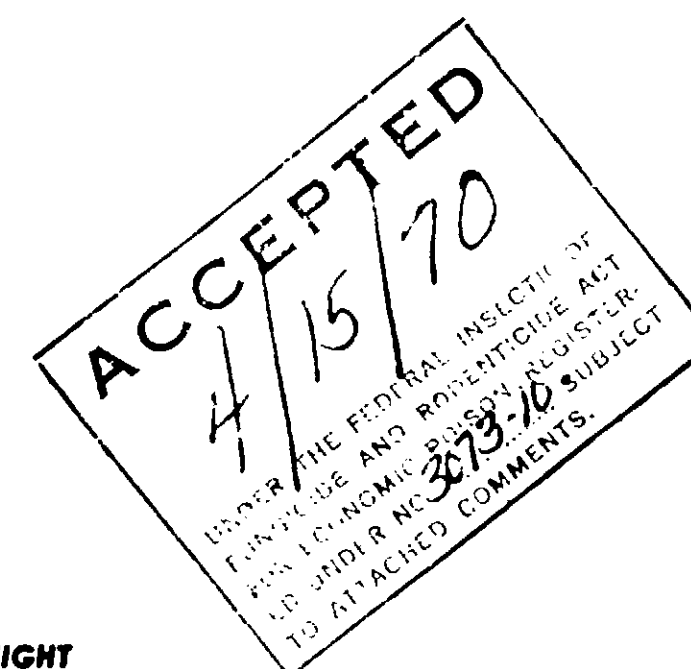

WOOLSEY
Millions of gallons
1853 by boat own
unique Anti-Fouling
the standard for
ocean testing have
marine life. With
ficient binder, this

DIRECTIONS

Prepare wood bottom
Rout loosely adhere
occasionally during
thoroughly into the
water Seam Compound
and coat of paint.
final coat to dry and
use turpentine or
other paint. Use no

CAUTION! COMBUSTIBLE
Use with adequate
and breathing of
after using and

AVOID FIRE

WOOLSEY
Made in U.S.A.

701 RED

1 GAL. (U.S.)
5/8 GAL. (IMPL.)

**HIGHLY PROTECTIVE
AGAINST BARNACLES,
CORROSION, SEAWEEDS,
AND MARINE GROWTHS**

201
COMPOSITION BY WEIGHT
Copper Oxide 15%
Red Iron Oxide C.I. 15%
Zinc Oxide 15%
Silicate 15%
Resin, Pine Tar 15%
Petroleum Thinner 15%
Aromatic Hydrocarbons 10%
Copper Expressed as Metallic 19%
U.S.D.A. Registration No. 3073-10

ACCEPTED
15/70
FEDERAL INSECTICIDE
AND FUNGICIDE ACT
U.S.D.A. REGISTER-
ED SUBJECT
NO ATTACHED COMMENTS

WOOLSEY COPPER PAINT

Millions of gallons of WOOLSEY Copper Paint have been used since 1853 by boat owners throughout the world. Complete satisfaction with this unique Anti-Fouling Paint offers testimony to the name "WOOLSEY" as the standard for quality. Decades of laboratory research and constant ocean testing have maintained a positive protection against underwater marine life. With its skillful compounding of highly toxic copper and efficient binder, this paint preserves and protects all wooden bottoms.

DIRECTIONS—STIR WELL BEFORE USING

Prepare wood bottom by removing all loose paint and foreign substances. Rout loosely adhering compound from seams. Mix contents WELL and stir occasionally during use. Apply first coat to clean dry surface, brushing thoroughly into the seams. Fill routed seams with Woolsey No. 895 Underwater Seam Compound. When this compound is "skin dry," apply a second coat of paint. On bare wood, a third coat should be applied. Allow final coat to dry about six hours before launching. If thinning is necessary, use turpentine or mineral spirits sparingly, but never add oil, varnish or other paint. Use no special primer under this paint.

CAUTION! COMBUSTIBLE—Keep away from heat and open flame. Use with adequate ventilation. Avoid prolonged contact with skin and breathing of vapor or spray mist. Harmful if swallowed. Close can after using and keep it out of the reach of children.

AVOID IMITATIONS

LOOK FOR THE FAMOUS MERMAID
AND SEA SERPENT ON THE LABEL.

WOOLSEY MARINE INDUSTRIES, Inc.

Made in U.S.A.

N.Y., N.Y. 10017

**QUALITY
SINCE 1853**