

WOOLSEY.

322

COMPOSITION BY WEIGHT	
Carbon-Black	1%
Tri-N-Butyltin Oxide	3%
Allyls & Butyl	14%
Acrylic Resin	14%
Aliphatic & Aromatic Hydrocarbons	27%
Propellant (Halogenated Aliphatic Hydrocarbons)	39%
U.S.P.A. Reg. No. 3879	100%

Self-Spraying
ANTI-FOULING
 for **OUTBOARD LOWER UNITS**

322 BLACK

ACTIVE INGREDIENT Bis (Tri-N-Butyltin) Oxide 3%
 INERT INGREDIENTS 97%
 Contains 1.2% Tin Expressed as Metallic.

3/14/69

322-3-27

SHAKE WELL BEFORE SPRAYING

**DO NOT PUNCTURE,
 INCINERATE OR STORE ABOVE 120°F.
 N.Y.F.D.—C. OF A. NO. 2516**

CONTAINS TOLUOL. EXPOSURE TO HEAT OR SUN MAY CAUSE BURSTING. USE WITH ADEQUATE VENTILATION. Avoid breathing of vapors. May be absorbed through skin and cause irritation. Avoid contact with skin, eyes or clothing. Should this occur, immediately remove contaminated clothing and wash skin with soap and water. For eyes, wash with plenty of water and get medical attention. Wash clothing before reuse. Avoid storage near food products. Harmful if swallowed.

**WOOLSEY ANTI-FOULING PAINT
 for OUTBOARD LOWER UNITS**

This easy-to-use anti-fouling protects outboard lower units from attachment of barnacles, annelids, algal grass and other fouling. A hard smooth finish that takes only seconds to apply where brush painting would be difficult and time-consuming. Contains organo-tin toxicant... is free from copper or mercury which might cause pitting or corrosion.

DIRECTIONS FOR USE — SHAKE WELL

SURFACE PREPARATION: Previously painted surfaces in good condition—Clean thoroughly to remove oil, grease, slime and dirt—then sand lightly and wash with solvent. New or Bare Metal—First apply one coat of Woolsey 724 728 Epoxy Metal Primer. Allow overnight dry, then sand lightly. Old Paint in poor condition should be removed with Woolsey 432 Non-Flammable Paint Remover. Surface should then be washed thoroughly with alcohol or Woolsey 442 Reducer and primed with 724 728.


SHAKE can vigorously for a minute after sound of agitator ball is clearly heard... also occasionally during use. Remove cap and make test application.

SPRAY when contents and air temperature are between 65° and 85°F. Use adequate ventilation with out strong drafts; avoid breathing of vapors. Hold can upright with nozzle 12" - 18" from surface—then press valve and spray on thin "mist coat" using an even sweeping motion until a wet appearance is noticeable. After one hour's dry, apply identical second coat. Wait two hours before immersion.

PROMPTLY after spraying invert can and press valve for several seconds until gas escapes. This clears valve for next use.

ACCEPTED WITH COMMENTS

U4

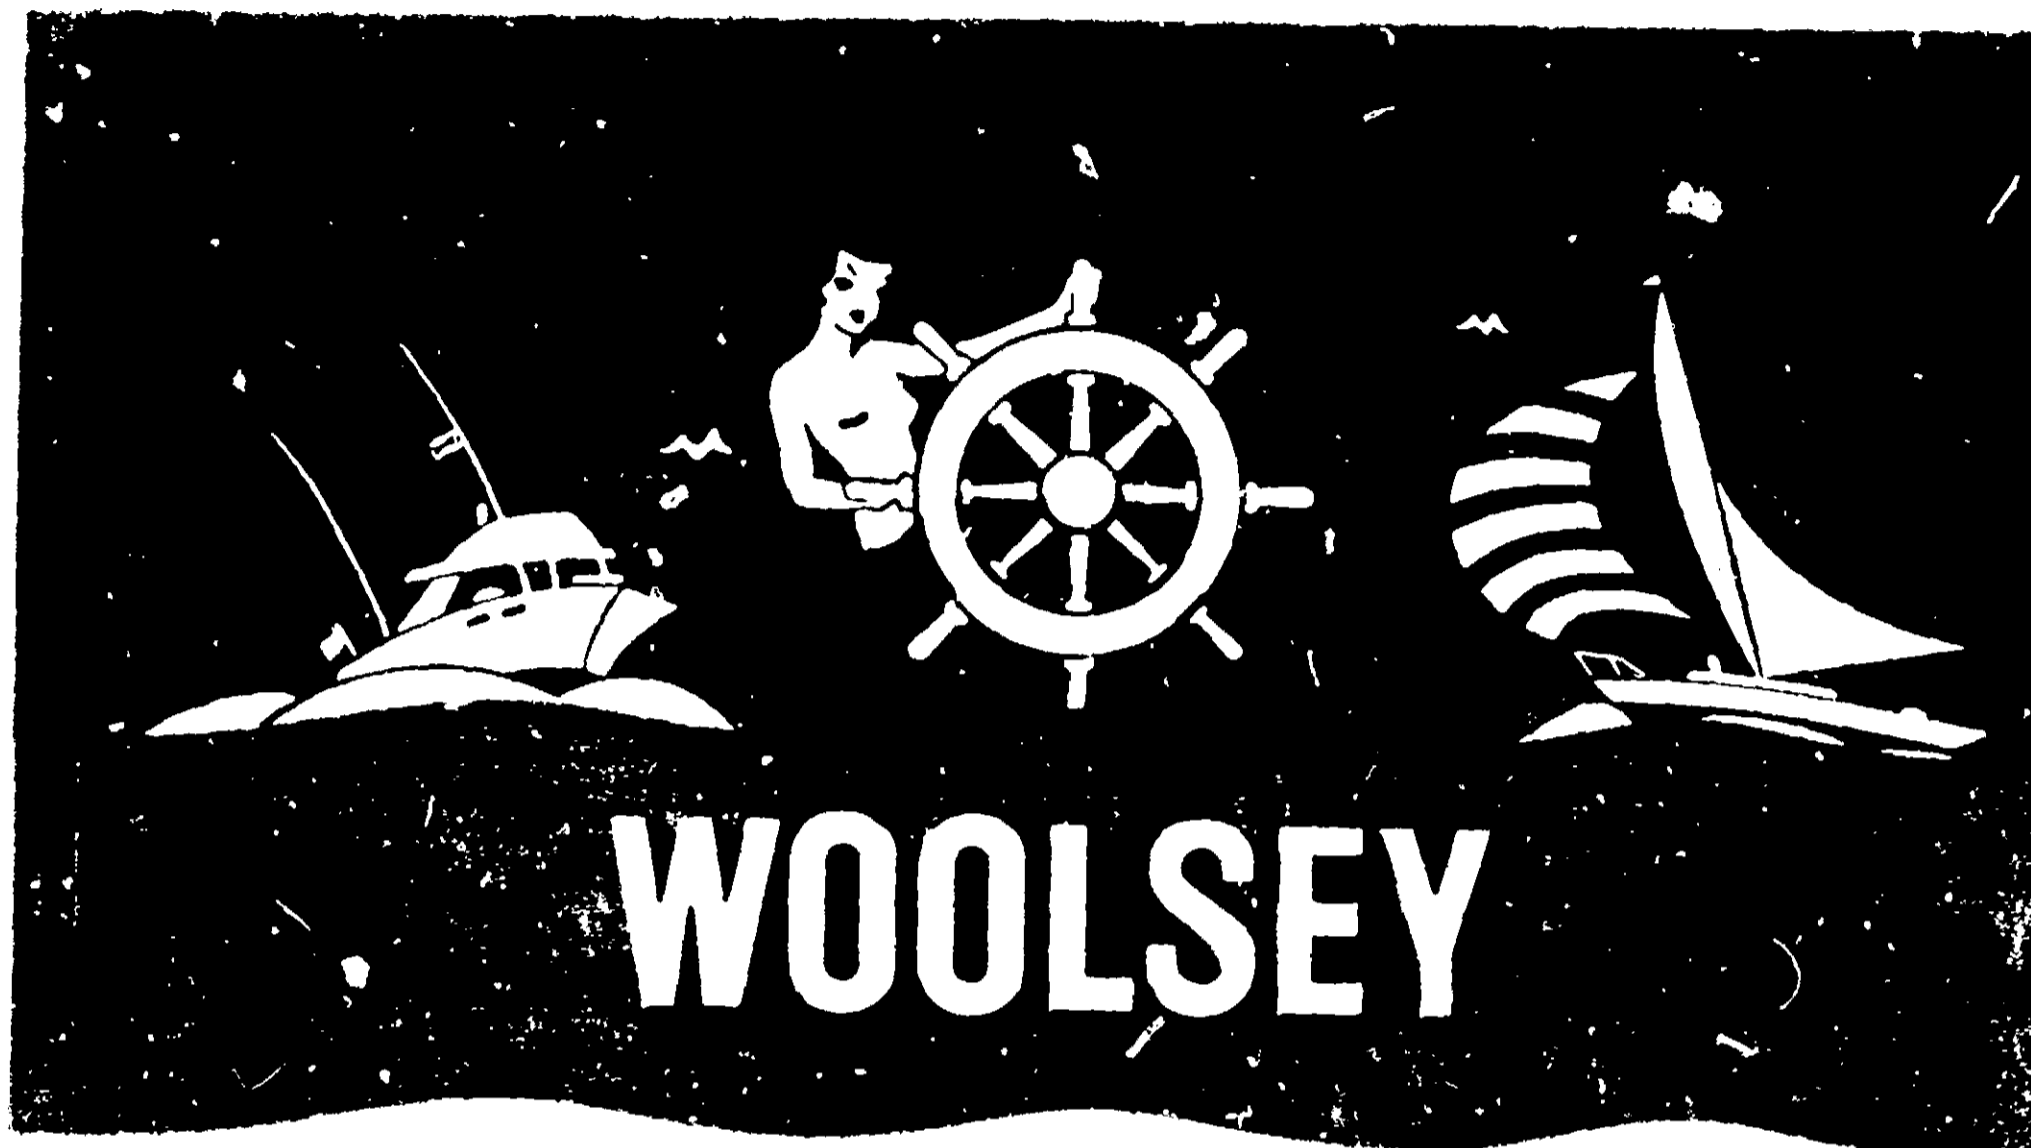

Self-Spraying
ANTI-FOULING
 for **OUTBOARD LOWER UNITS**

322 BLACK

ACTIVE INGREDIENT Bis (Tri-N-Butyltin) Oxide 3%
 INERT INGREDIENTS 97%
 Contains 1.2% Tin Expressed as Metallic.

DANGER! EXTREMELY FLAMMABLE. KEEP FROM
 HEAT OR FLAME. CONTENTS UNDER PRESSURE. VAPOR
 HARMFUL. MAY CAUSE SKIN IRRITATION. KEEP OUT
 OF REACH OF CHILDREN.

SHAKE WELL BEFORE SPRAYING

**DO NOT PUNCTURE,
 INCINERATE OR STORE ABOVE 120°F.
 N.Y.F.D.—C. OF A. NO. 2516**

**CONTAINS TOLUOL. EXPOSURE TO HEAT OR SUN
 MAY CAUSE BURSTING. USE WITH ADEQUATE
 VENTILATION.** Avoid breathing of vapors.
 May be absorbed through skin and cause
 irritation. Avoid contact with skin, eyes
 or clothing. Should this occur, immediately
 remove contaminated clothing and wash
 skin with soap and water. For eyes, wash
 with plenty of water and get medical
 attention. Wash clothing before reuse.
 Avoid storage near food products. Harm-
 ful if swallowed.

**WOOLSEY ANTI-FOULING PAINT
 for OUTBOARD LOWER UNITS**

This easy-to-use anti-fouling protects outboard
 lower units from attachment of barnacles, an-
 nelids, algal grass or other fouling. A hard
 smooth finish that takes only seconds to apply
 where brush painting would be difficult and
 time-consuming. Contains organo-tin toxicant...
 is free from copper or mercury which might
 cause pitting or corrosion.

DIRECTIONS FOR USE — SHAKE WELL

SURFACE PREPARATION: *Previously painted sur-
 faces in good condition*—Clean thoroughly to remove
 oil, grease, slime and dirt—then sand lightly and
 wash with solvent. *New or Bare Metal*—First apply
 one coat of Woolsey 724 728 Epoxy Metal Primer.
 Allow overnight dry, then sand lightly. *Old Paint* in
 poor condition should be removed with Woolsey 432
 Non-Flammable Paint Remover. Surface should then
 be washed thoroughly with alcohol or Woolsey 442
 Reducer and primed with 724 728.

SHAKE can vigorously for a minute after sound of
 agitator ball is clearly heard... also occasionally
 during use. Remove cap and make test application.

SPRAY when contents and air temperature are be-
 tween 65° and 85°F. Use adequate ventilation with-
 out strong drafts; avoid breathing of vapors. Hold
 can upright with nozzle 12" - 18" from surface—then
 press valve and spray on thin "mist coat" using an
 even sweeping motion until a wet appearance is
 noticeable. After one hour's dry, apply identical
 second coat. Wait two hours before immersion.

PROMPTLY after spraying invert can and press valve
 for several seconds until gas escapes. This clears
 valve for next use.

ACCEPTED
 3/14/69
 3073-27

ACCEPTED WITH COMMENTS