


# WOOLSEY

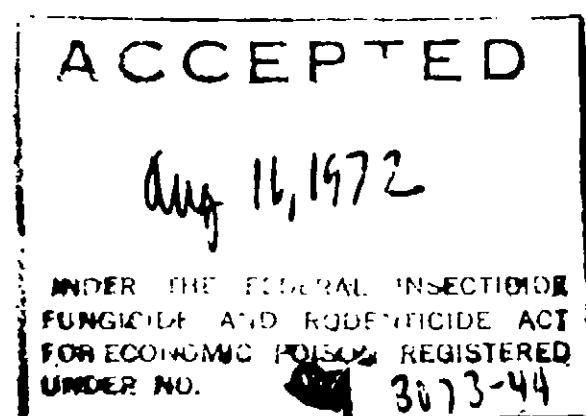

679  
COMPOSITION BY WEIGHT

Carbon Black	2.0%
Magnesium Silicate	15.0%
Vinyl Resin, Resin	18.0%
Tributyltin Fluoride	10.0%
Aromatic Hydrocarbons	16.0%
Ketones	39.0%
	100%

Contains 3.9% Tin Expressed as Metallic  
E.P.A. Registration No. 3073-44

## LUMALAST™ ANTI-FOULING FINISH

FOR ALUMINUM BOATS AND 1/0's

### 679 BLACK

ACTIVE INGREDIENT: Tributyltin Fluoride ..10%  
INERT INGREDIENTS: .....90%

**WARNING**—Keep out of  
reach of children.  
May cause skin irritation.  
See caution on back label.

FOR ALUMINUM  
UNITS. ALSO FOR  
WOOD, FIBERGLASS

Contains no  
corrosive to

"LUMALAST"  
action with  
sleekness

For protection  
attachment, it  
vides maximum  
power

"LUMALAST"  
abrasion—  
beaching, etc.

Best results  
Woolsey

**WARNING**—  
swallow  
which may  
with water  
contaminated  
environment  
or discarded



**FOR ALUMINUM HULLS AND 1/0 UNITS. ALSO IDEAL FOR WOOD, PLY-WOOD, FIBER-GLASS AND STEEL HULLS.**

•  
Contains organo-tin toxicant so is non-corrosive to all metals.

•  
"LUMALAST" combines powerful toxic action with extreme smoothness and sleekness that makes it a yachting favorite.

•  
For protection against all fouling attachment, even in tropical waters. Provides maximum hull speeds for all power and sailing craft.

•  
"LUMALAST" has high resistance to abrasion—withstands the rigors of beaching, launching and frequent trailering.

•  
Best results are obtained by using Woolsey's own quality brushes.

**SURFACE PREPARATION**—If previously painted with "OTT," or "Vin-elast" or "Lumalast," apply "LUMALAST" directly after proper surface preparation of a thorough wet sanding and removal of all loose paint. Otherwise, completely remove all old finishes and prepare the bare surface as follows:

**WOOD**—Reef out old embrittled seam compound and prime routed seams with "LUMALAST" thinned 10% with Woolsey 719 "Vin-elast" Solvent. Follow with Woolsey 894 "Vin-elast" Bottom Seam Compound. Fill cracks or imperfections with Woolsey 883 Vinyl Plastic Surfacer. Apply 1 priming coat of "LUMALAST" thinned 10% with 719 Solvent to ensure penetration. Finish with at least 2, preferably 3 coats of "LUMALAST".

**METAL**—Prime with 2 coats Woolsey 648/649 "MFP" Epoxy Primer. (Alternate System: Prime with 1 coat Woolsey 716/717 Bare Metal Primecoat followed by 2 coats Woolsey 718 Barrier Coat). Finish with at least 2, preferably 3 coats of "LUMALAST".

**FIBER-GLASS**—Scour and scrub with Woolsey "Shipmate" 625 Heavy Duty Fiber-glass Cleaner or other strong abrasive agent. Rinse well with fresh water and allow to dry. Sand vigorously until all sheen on gel coat has been removed. Use 1/0 or No. 80 grit production paper. Wipe with clean rag moistened with alcohol. Apply "LUMALAST" direct or prime with 1 coat Woolsey 648/649 "MFP" Epoxy Primer. Finish with at least 2, preferably 3 coats of "LUMALAST".

**APPLICATION**—MIX WELL BEFORE USING. Also stir occasionally during use.

**THINNING**—Normally not required for brush application, except when using as a prime-coat. Use 719 "Vin-elast" Solvent supplied to clean brushes and equipment.

**COVERAGE**: 1 coat covers 400 sq. ft. per gallon at full body.

**NUMBER OF COATS**—At least two, and preferably three coats on original application. Thereafter, maintain annually with two heavy coats preceded by a thorough wet sanding. Allow at least four hours drying time between coats. If desired, final coat may be burnished for racing.

**LAUNCHING**—Allow at least an overnight dry before launching. When "MFP" Epoxy Primer is used, allow a full 72 hours before launching.

**MAINTENANCE**—To maintain appearance during season, scrub occasionally with short handled stiff brush and "Shipmate" 625 Heavy-Duty Fiber-glass Cleaner.

**WARNING! FLAMMABLE** — Keep away from heat and open flame. Use with adequate ventilation. Harmful if swallowed. Do not get in eyes, on skin or clothing. Avoid breathing spray mist. Contains organo-tin compound which may be absorbed through skin or cause irritation to the eyes or skin. Should contact occur, flush eyes with water and wash skin with soap and water. If irritation persists, obtain medical attention. Remove contaminated clothing and wash before reuse. Close container after using. Not for use or storage in or around the home environment. Keep out of the reach of children. Do not reuse empty container. Destroy by perforating or crushing. Bury or discard in a safe place.