



ANTI-FOULING

DESIGNED FOR USE ON WOOD, FIBER-GLASS AND METAL—SMALL BOAT BOTTOMS, WATERLINE STRIPING AND WIDE BOOTTOPS—IN SALT OR FRESH WATER


Contains tin toxicant which protects against barnacles and all forms of fouling attachment including algae

Provides a smooth hard coating—retains clear bright appearance

Excellent for maximum racing speed performance. Withstands alternate wetting and drying

SUR finish
sand finish
WOOD After cracks before Finish
FIBER Fiber-allow 1/10 of thickness allow Wool Patch
METAL nate: coats Hard
APPL
TUNE Paint
COVE
LAUN Epoxy

WARNING! COMBUSTIBLE — Keep away from fire. Harmful if swallowed. Do not get in eyes. Should contact occur, flush eyes with water and obtain medical attention. Remove container immediately. Not for use or storage in or around living quarters.

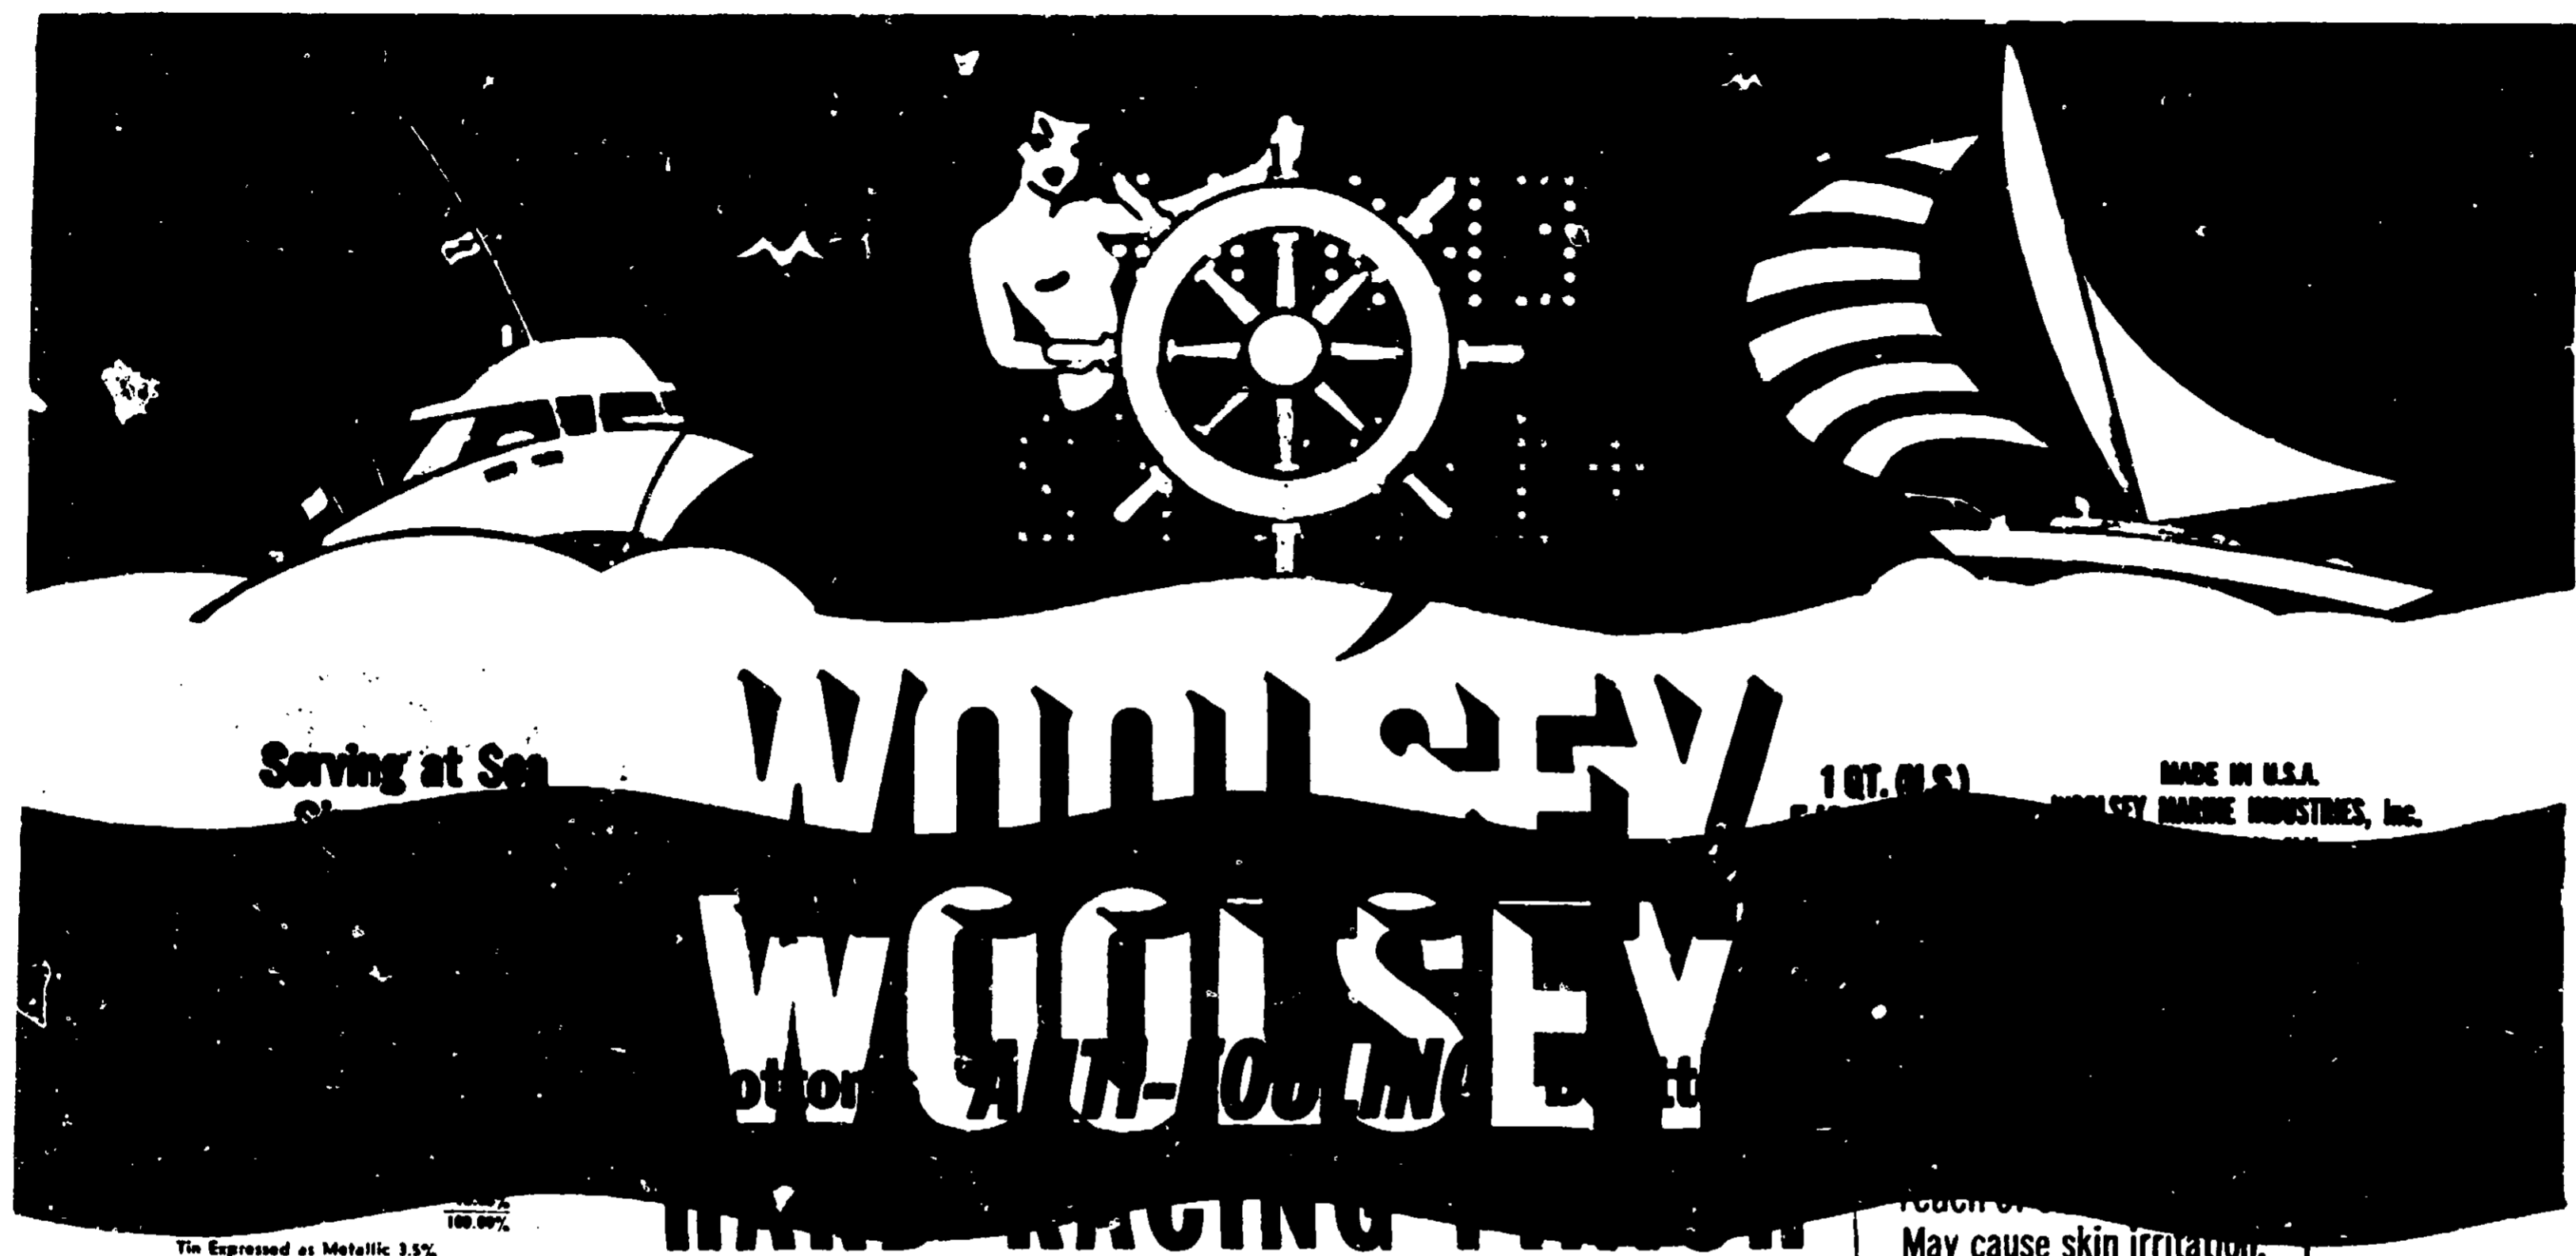

Serving at Sea

WOOLSEY

WOOLSEY

ANTI-FOULING

1 QT. (U.S.)

MADE IN U.S.A.
WOOLSEY MARINE INDUSTRIES, Inc.



Tin Expressed as Metallic 3.5%
E. P. A. Registration No. 3073-45

ACCEPTED
2/9/72
FEDERAL BUREAU OF INVESTIGATION
U.S. DEPARTMENT OF JUSTICE
POISON REGISTER
REGISTRATION NO. 3073-45 SUBJECT
TO FEDERAL COMMENTS.

T 759 GREEN

ACTIVE INGREDIENT: (Tri-n-Butyltin Resinate) 18.65%
INERT INGREDIENTS: 81.35%

May cause skin irritation.
See caution on back label.

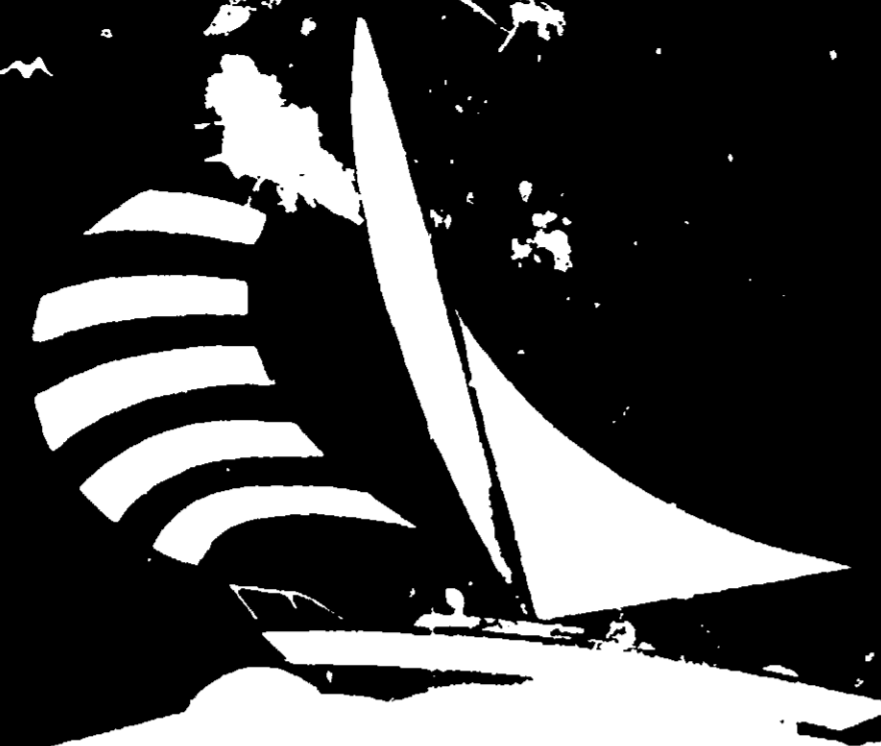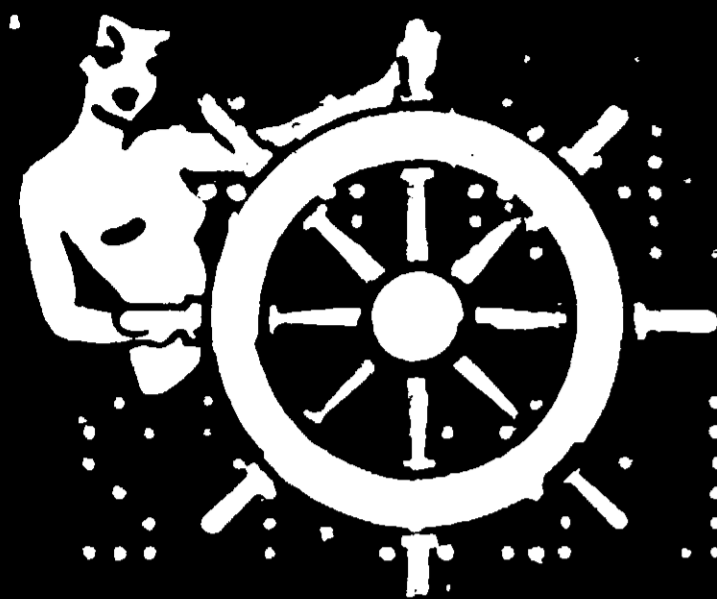

ANTI-FOULING HARD RACING FINISH

DESIGNED FOR USE ON WOOD, FIBER-GLASS AND METAL—SMALL BOAT BOTTOMS, WATERLINE STRIPING AND WIDE BOOTTOPS—IN SALT OR FRESH WATER

SURFACE PREPARATION—If previously painted with a hard racing finish which is still in good condition, apply directly after a thorough wet sanding and removal of all loose paint. Otherwise, completely remove all old finishes and prepare the bare surface as follows:

WOOD—Apply a priming coat reduced 10% with Woolsey 433 Paint Thinner. After 24 hours dry, fill seams with Woolsey Elastic Seam Compound. Fair up dents, cracks or imperfections with Woolsey 890 Trowel Cement. Allow to dry thoroughly before sanding surface lightly. Apply two full coats of Anti-Fouling Hard Racing Finish allowing 24 hour dry between coats.

FIBER-GLASS—Scour and scrub with Woolsey "Shipmate" 625 Heavy Duty Fiber-glass Cleaner or other strong abrasive agent. Rinse well with fresh water and allow to dry. Sand vigorously until all sheen on gel coat has been removed, using 1/0 or No. 80 grit production paper. Wipe with clean rag moistened with paint thinner. Apply three coats of this finish as received directly to fiber-glass surface allowing 24 hour dry between coats. If required, glaze bare fiber-glass with Woolsey 742/743 "MFP" Epoxy Glazing Compound or 471 "Re-Glass-It" Gel Coat Patching Compound.

METAL—Prime with two coats of Woolsey 648/649 "MFP" Epoxy Primer. (Alternate: prime with 1 coat Woolsey 716/717 Bare Metal Primecoat followed by two coats of Woolsey 718 Barrier Coat.) Finish with three full coats of Anti-Fouling Hard Racing Finish allowing 24 hour dry between coats.

APPLICATION—MIX WELL BEFORE USING. Also stir occasionally during use.

THINNING—Normally not required except when priming. Use Woolsey 433 Paint Thinner or mineral spirits.

COVERAGE—1 full coat covers 125 sq. ft. per quart on new work.

LAUNCHING—Allow at least an overnight dry before launching. When an "MFP" Epoxy Primer is used, allow a full 72 hours before launching.

•
Contains tin toxicant which protects against barnacles and all forms of fouling attachment including algae

•
Provides a smooth hard coating—retains clear bright appearance

•
Excellent for maximum racing speed performance. Withstands alternate wetting and drying

WARNING! COMBUSTIBLE — *Keep away from heat and open flame. Use with adequate ventilation. Harmful if swallowed. Do not get in eyes, on skin or clothing. Avoid breathing spray mist. Contains organo-tin compound which may be absorbed through skin or cause irritation to the eyes or skin. Should contact occur, flush eyes with water and wash skin with soap and water. If irritation persists, obtain medical attention. Remove contaminated clothing and wash before reuse. Close container after using. Not for use or storage in or around the home environment. Keep out of the reach of children.*

WOOLSEY ANTIFOULING RACING FINISH

1 QT. 0.95 L.
INDUSTRIES, Inc.

Each of
May cause skin irritation.
See caution on back label.

T759 GREEN

ACTIVE INGREDIENT: (Tin-Diethyltin Resinate) 18.65%
INERT INGREDIENTS: 81.35%