

ANTI-FOULING HARD RACING I

DESIGNED FOR USE ON
WOOD, FIBER-GLASS AND
METAL—SMALL BOAT BOT-
TOMS, WATERLINE STRIP-
PING AND WIDE BOOTTOPS
—IN SALT OR FRESH
WATER

●
Contains tin toxicant which
protects against barnacles
and all forms of fouling at-
tachment including algae

●
Provides a smooth hard coat-
ing—retains clear bright
appearance

●
Excellent for maximum rac-
ing speed performance.
Withstands alternate wetting
and drying

SURFACE PREPARATION—If previously pain finish which is still in good condition, apply directly sanding and removal of all loose paint. Otherwise, com finishes and prepare the bare surface as follows:

WOOD—Apply a priming coat reduced 10% with Wool After 24 hour dry, fill seams with Woolsey Elastic Seam Co cracks or imperfections with Woolsey 890 Trowel Cement. before sanding surface lightly. Apply two full coats of A Finish allowing 24 hour dry between coats.

FIBER-GLASS—Scour and scrub with Woolsey "Shipn Fiber-glass Cleaner or other strong abrasive agent. Rinse w allow to dry. Sand vigorously until all sheen on gel coat h 1/0 or No. 80 grit production paper. Wipe with clean ra thinner. Apply three coats of this finish as received direct allowing 24 hour dry between coats. If required, glaze Woolsey 742/743 "MFP" Epoxy Glazing Compound or 471 Patching Compound.

METAL—Prime with two coats of Woolsey 648/649 "MFP nate: prime with 1 coat Woolsey 716/717 Bare Metal Pri coats of Woolsey 718 Barrier Coat.) Finish with three fu Hard Racing Finish allowing 24 hour dry between coats.

APPLICATION—MIX WELL BEFORE USING. Also stir o

THINNING—Normally not required except when prim Paint Thinner or mineral spirits.

COVERAGE—1 full coat covers 125 sq. ft. per quart on ne

LAUNCHING—Allow at least an overnight dry before laur Epoxy Primer is used, allow a full 72 hours before launch

WARNING! COMBUSTIBLE — *Keep away from heat and open flame. Use with ade*
Harmful if swallowed. Do not get in eyes, on skin or clothing. Avoid breathing spr
organo-tin compound which may be absorbed through skin or cause irritation to
Should contact occur, flush eyes with water and wash skin with soap and water. If i
obtain medical attention. Remove contaminated clothing a-d wash before reuse. *Cle*
using. Not for use or storage in or around the home environment. Keep out of the rea
not reuse empty container. Destroy by perforating or crushing. Bury or discard in a s



ANTI-FOULING HARD RACING F

DESIGNED FOR USE ON WOOD, FIBER-GLASS AND METAL—SMALL BOAT BOTTOMS, WATERLINE STRIPING AND WIDE BOOTTOPS—IN SALT OR FRESH WATER

●
Contains tin toxicant which protects against barnacles and all forms of fouling attachment including algae

●
Provides a smooth hard coating—retains clear bright appearance

●
Excellent for maximum racing speed performance. Withstands alternate wetting and drying

SURFACE PREPARATION—If previously painted finish which is still in good condition, apply directly after sanding and removal of all loose paint. Otherwise, complete finishes and prepare the bare surface as follows:

WOOD—Apply a priming coat reduced 10% with Woolsey. After 24 hour dry, fill seams with Woolsey Elastic Seam Compound, cracks or imperfections with Woolsey 890 Trowel Cement. A before sanding surface lightly. Apply two full coats of Ant Finish, allowing 24 hour dry between coats.

FIBER-GLASS—Scour and scrub with Woolsey "Shipmate" Fiber-glass Cleaner or other strong abrasive agent. Rinse well, allow to dry. Sand vigorously until all sheen on gel coat has been removed. Use 1/0 or No. 80 grit production paper. Wipe with clean rag and thinner. Apply three coats of this finish as received directly after allowing 24 hour dry between coats. If required, glaze with Woolsey 742, "MFP" Epoxy Glazing Compound or 471 Patching Compound.

METAL—Prime with two coats of Woolsey 648/649 "MFP" Primer. (Note: prime with 1 coat Woolsey 716/717 Bare Metal Primer, two coats of Woolsey 718 Barrier Coat.) Finish with three full coats of Hard Racing Finish allowing 24 hour dry between coats.


APPLICATION—MIX WELL BEFORE USING. Also stir occasionally.

THINNING—Normally not required except when priming. Use Paint Thinner or mineral spirits.

COVERAGE—1 full coat covers 125 sq. ft. per quart on new surfaces.

LAUNCHING—Allow at least an overnight dry before launching. If Epoxy Primer is used, allow a full 72 hours before launching.

WARNING! COMBUSTIBLE — *Keep away from heat and open flame. Use with adequate ventilation.* Harmful if swallowed. Do not get in eyes, on skin or clothing. Avoid breathing spray. This is an organo-tin compound which may be absorbed through skin or cause irritation to the respiratory system. Should contact occur, flush eyes with water and wash skin with soap and water. If irritation occurs, obtain medical attention. Remove contaminated clothing and wash before reuse. **Close container after use.** *Not for use or storage in or around the home environment. Keep out of the reach of children.* **Do not reuse empty container. Destroy by perforating or crushing. Bury or discard in a safe manner.**

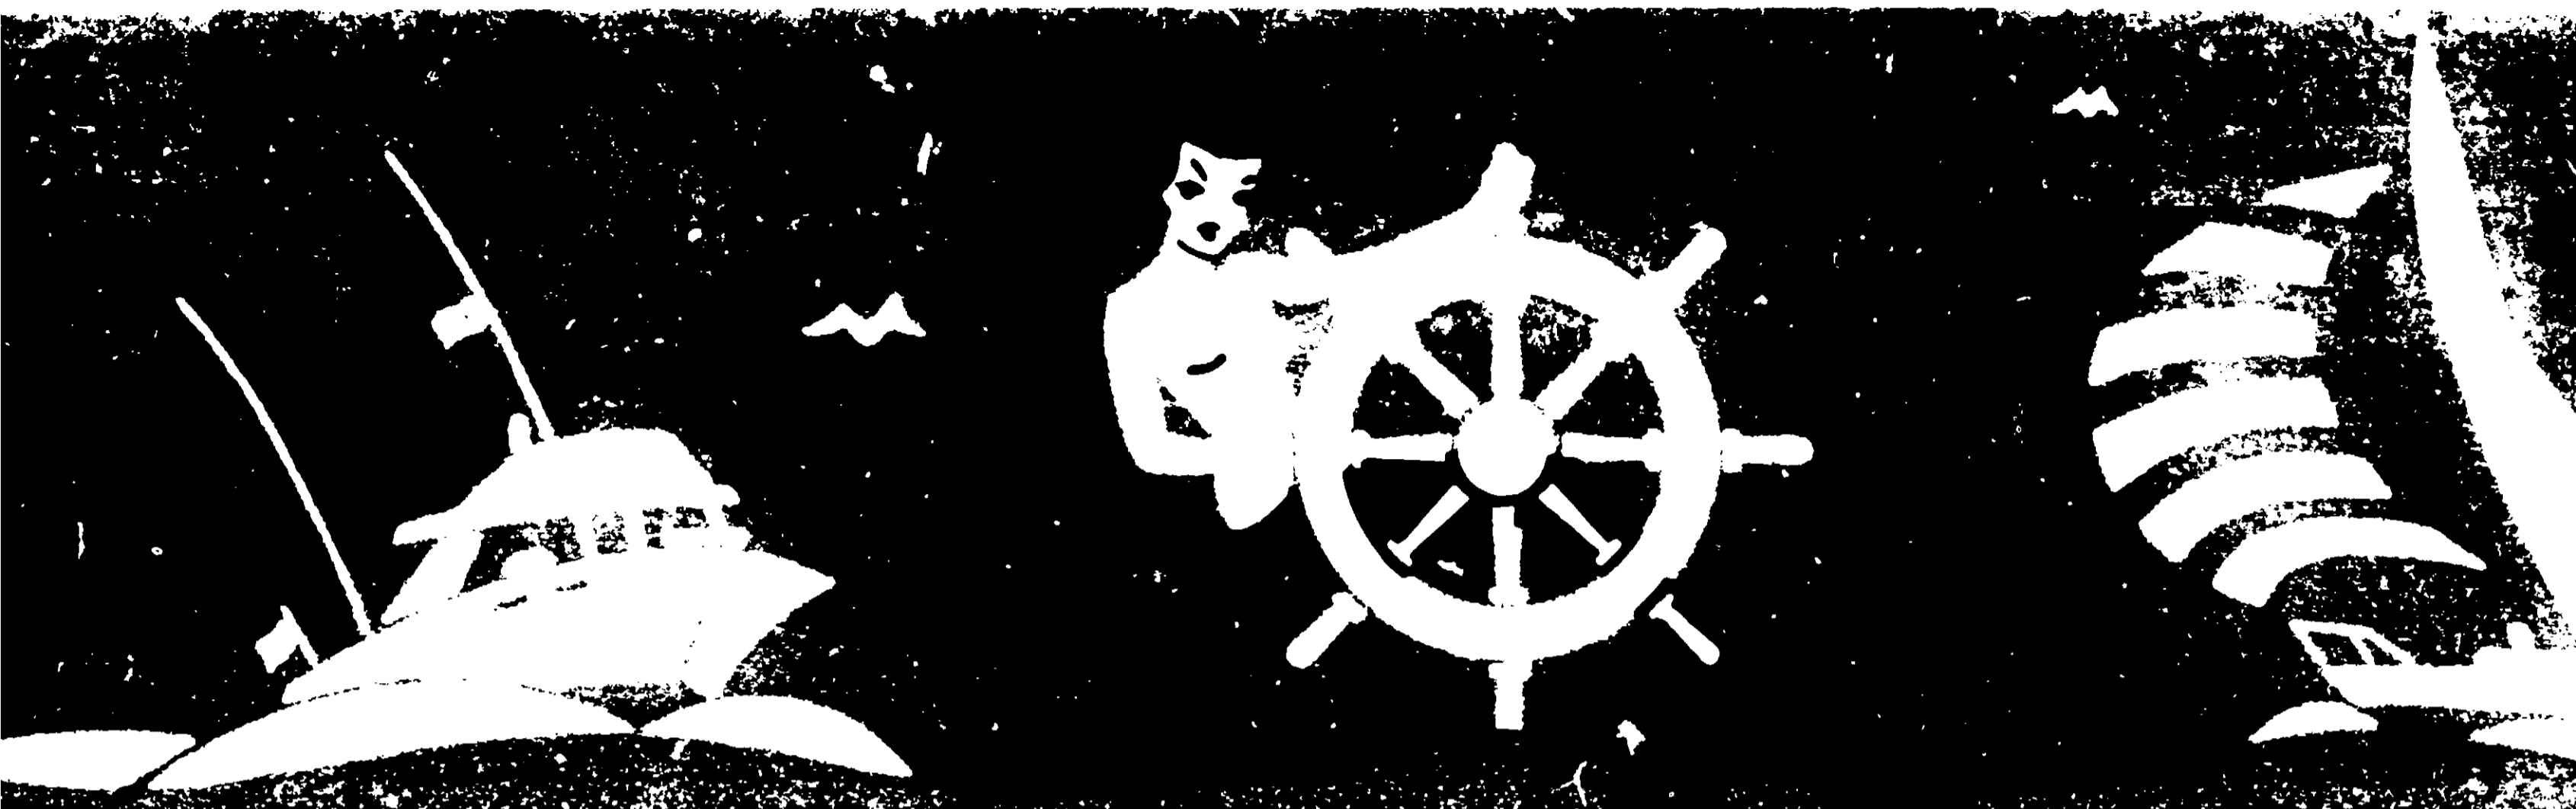

WOOLSEY®

Bottoms *ANTI-FOULING* Boottops **HARD RACING FINISH**

T756 BLACK

ACTIVE INGREDIENT: (Tributyltin Resinate) ... 19.7%
INERT INGREDIENTS: ... 80.3%

T756

COMPOSITION BY WEIGHT

Carbon Black	1.8%
Calcium Carbonate	9.3%
Vinyl Safflower Alkyd Copolymer	37.1%
Mineral Spirits	32.1%
Tributyltin Resinate	19.7%

100%

Tin Expressed as Metallic 3.75%
E.P.A. Registration No. 3073-47

CAUTION-Keep out of reach of children
May cause skin irritation
See cautions on label