


WOOLSEY

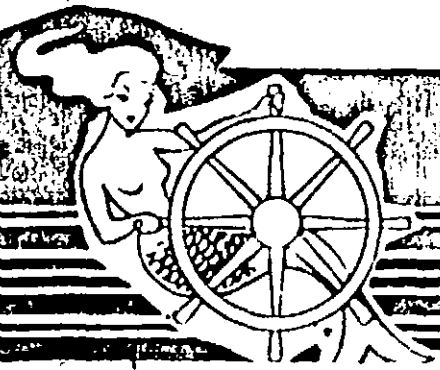

COPOL

**Organic Metallic Anti-Fouling
Polymer**

2500 Red

For aluminum, wood, plywood and fiberglass hulls.

KEEP OUT OF REACH
OF CHILDREN
DANGER
SEE PANELS FOR
PRECAUTIONARY
STATEMENTS

WOOLSEY MARINE

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS
AND DOMESTIC ANIMALS**

**DANGER
KEEP OUT OF REACH
OF CHILDREN**

Corrosive. Causes severe skin and eye damage and burns. Harmful if absorbed through skin, swallowed, or inhaled. Do not get on skin, in eyes, or on clothing. Wear safety glasses. Wear protective clothing such as long-sleeved cotton shirt, long pants, hat and gloves. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse. Avoid breathing vapor. Use only with adequate ventilation.

PRACTICAL TREATMENT

In case of skin contact, remove contaminated clothing and immediately wash skin with soap and water. Get medical attention. Wash contaminated clothing before reuse. If inhaled, remove victim to fresh air. Use artificial respiration if breathing has stopped. Get immediate medical treatment. If swallowed, do not induce vomiting. Promptly drink a large quantity of milk, egg whites, gelatin solution, or if these are not available, large quantities of water. Avoid alcohol. Get medical attention.

NOTE TO PHYSICIANS: Probable mucosal damage may contraindicate the use of gastric lavage.

IF IN EYES: Flush with plenty of water. Get medical attention.

ENVIRONMENTAL HAZARD

This material is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

**PHYSICAL OR CHEMICAL
HAZARD**

COMBUSTIBLE: Do not use or store near heat or open flame.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling. **NOTE:** When product is used in confined areas or applied by spraying, wear a respirator jointly approved by the Mining Enforcement and Safety Administration (formerly the U.S. Bureau of Mines) and by the National Institute for Occupational Safety and Health under the provisions of 30 CFR 11.

PREPARATION: Surface must always be clean and dry. Always use surface clean with Woolsey Thinner.

GENERAL APPLICATION PROCEDURES: Apply with a good quality (3/32" or finer) sandpaper.

MIXING AND THINNING INSTRUCTIONS: Mix with Woolsey Thinner only when necessary with Miracol.

MINIMUM DRY AND LAUNCHING TIMES: 60°F - 6 hours. Below 60°F - 8 hours. Allow 16 hours for full cure.

THEORETICAL COVERAGE: 200 sq. ft. per gallon.

CLEAN-UP: For tools, equipment, etc. use Woolsey Thinner.

APPLICATION SUGGESTIONS

PREVIOUSLY PAINTED SURFACES: Existing paint must be clean and lightly sanded. Apply two (2) coats of Miracol.

NEW OR BARE FIBERGLASS: No-sand method. Clean surface with Fiberglass Solvent Wash 625. Apply one coat with brush or roller. Allow to dry 1 to 2 hours. Apply second coat. Sanding method: Clean entire surface with Woolsey Thinner. Clean entire surface with 60-120 grit production paper. Apply two coats of Miracol.

NEW AND BARE WOOD: Sand well with 80-120 grit sandpaper. Clean surface with Woolsey Thinner. Apply first coat of Miracol after it has dried. Apply second coat (do not thin) after one hour.

ALUMINUM/STEEL: Use appropriate priming. Apply two (2) to three (3) coats of Miracol.

HAUL-OUTS AND WINTER STORAGE: Immerse in fresh water hose and a soft scrub brush to remove Miracol. Miracol does not lose toxicity or anti-fouling properties after winter storage. recoating is required, wash and scrub thoroughly before applying fresh coat of Miracol. Miracol. If Miracol must be sprayed to obtain a satisfactory finish, use competent professional spray applicators utilizing proper technique.

GENERAL DESCRIPTION

MIRACOL is an anti-fouling protective coating for marine hulls.

MIRACOL extends the duration of effective anti-fouling and anti-rusting finishes.

MIRACOL can be cleaned easily in or out of water.

STORAGE AND HANDLING

Do not contaminate water, food or feed by storage or disposal. Do not use according to label instructions.

CONTAINER DISPOSAL: Triple rinse (or equivalent) and dispose of in a sanitary landfill or by other approved method.

COMPOSITION BY WEIGHT

Tin Expressed as Melanic

Tri-n-butyltin Methacrylate

Tri-n-butyltin Fluoride

Red Iron Oxide

Xylo

Mineral Spirits

**1 gallon (U.S.)
3.785 liters**

ACTIVE INGREDIENTS

Tri-n-butyltin Methacrylate
(as part of a polymer) . 20.57%

Tri-n-butyltin Fluoride . 10.11%

INERT INGREDIENTS . 69.32%

100%

Made in U.S.A. Woolsey Marine, Division of Metropolitan Consolidated Industries, 1250 Broadway, New York, N.Y. 10013
E.P.A. Estimate No. 3073-NY-1 E.P.A. Registration No. 3073-76 Reg. Trade Mark