


# GLOUCESTER



★ MARINE ★

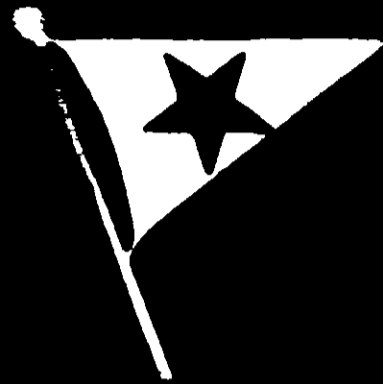

SPECIALTIES

RECEIVED

Oct-15-1971

**CAUTION — FLAMMABLE**  
The flash point of this product is 100°F.  
**DO NOT USE** near open flame or where  
sparks or glowing filaments are present.

## SEA JACKET PRESERVATIVE

For Protection of Wood and Fabric Against  
DRY ROT, FUNGUS, TERMITES, MILDEW

### 700 CLEAR

In Two Types  
701 GREEN (Copper Base)  
and  
700 CLEAR (Zinc Base)

ACTIVE INGREDIENTS	100.0%
ZINC NAPHTHENATE	25.0
(Zinc as Metallic 2%)	
PETROLEUM DISTILLATE	75.0
	<hr/>
	100.0%

Do not reuse empty container. Destroy it  
by burying with waste or burning. Stay away  
from smoke or flames. Return empty drum  
to drum reconditioner or destroy by perfor-  
ating or crushing and burying in a safe  
place.

**CAUTION**  
KEEP OUT OF REACH OF CHILDREN  
HARMFUL OR FATAL IF SWALLOWED  
SEE CAUTIONS ELSEWHERE ON THE LABEL

Do not contaminate water by cleaning  
of equipment, or disposal of waste.

# SEA JACKET PRESERVATIVE

For Protection of Wood and Fabric Against  
**DRY ROT, FUNGUS, TERMITES, MILDEW**

## 700 CLEAR

ACTIVE INGREDIENTS	100.0%
ZINC NAPHTHENATE	25.0
(Zinc as Metallic 2%)	
PETROLEUM DISTILLATE	75.0
	<hr/>
	100.0%

**CAUTION**  
 KEEP OUT OF REACH OF CHILDREN  
 HARMFUL OR FATAL IF SWALLOWED  
 SEE CAUTIONS ELSEWHERE ON THE LABEL

In Two Types  
**701 GREEN (Copper Base)**  
 and  
**700 CLEAR (Zinc Base)**

Do not contaminate water by cleaning  
 of equipment, or disposal of waste.

## GLOUCESTER SEA JACKET PRESERVATIVE

The preservative gives positive protection, according to accepted standards, against dry rot, fungus, termites, and mildew. It is particularly recommended for sills, fences, fence posts, porches, railings, outside steps, outside furniture, screens, doors, storm windows, blinds, docks, floats, and piers. Pierists use it for greenhouse sash, flats, and stakes. Wise boat owners apply it to boat frames, spars, planking, decking, beams, ropes, and canvas.

### DIRECTIONS FOR USE

This solution is ready to use as it comes from the can, and it may be applied by spray, brush or dip. In brushing or spraying, apply at least two liberal coats. In dipping, a minimum immersion of three minutes is required, and 12 to 48 hours should be allowed for posts and other large timbers.

Wood to be treated should be dry, clean, and all bark, paint, varnish or other surface films removed. Care should be taken to coat any surfaces exposed by sawing, boring or sanding after original treatment. Be sure also to treat surfaces which will be butted together. One gallon will treat 250 to 400 square feet of lumber, depending on type and condition of wood.

When treated surfaces are to be painted, a minimum of 48 hours drying time should be allowed.

This product can readily be removed from hands, brushes and containers with kerosene or mineral spirits. Keep container tightly closed to prevent evaporation.

### SPECIAL INSTRUCTIONS FOR CANVAS NETS AND ROPES

Unless the green color is desired, canvas tarpaulins, covers, decks and sails should be treated with the clear preservative. Apply by dipping or by spray or brush until fabric is saturated, then dry in open air. The life of rope, lines and nets is very greatly extended by similar treatment, the green preservative being recommended for this purpose.

## CAUTION

CONTAINS PETROLEUM DISTILLATE

If swallowed, Do Not Induce Vomiting. CALL PHYSICIAN IMMEDIATELY. COMBUSTIBLE. Keep away from heat and open flame.

USE WITH ADEQUATE VENTILATION

Avoid contact with skin and breathing of vapor or spray mist. Do not transfer contents to bottles or other unlabelled containers. Close container after each use.

KEEP OUT OF REACH OF CHILDREN

GLOUCESTER PAINTS, INC.

GLOUCESTER, MASS., U. S. A.

U.S.D.A. Reg. No. 3482-19  
 GP Form 700-871