

GLOUCESTER



RAPID
DRYING

"COPPERCLAD"

SHIPBOTTOM ANTIFOULING COMPOSITION
FOR WOODEN OR STEEL HULLS



3482-29
EASY
BRUSHING

ACCEPTED
APR 6 1971
U.S. DEPARTMENT OF AGRICULTURE
OFFICE OF THE FEDERAL INSPECTOR
FOR THE FERTILIZER AND PESTICIDE ACT
HUNTSVILLE, ALABAMA
H & J INC. REG. TRADE MARK

ACTIVE INGREDIENT
Cuprous Oxide* 36.3%
INERT INGREDIENTS 63.7
100.0%

507-RED



*Total copper metal
(from cuprous oxide) 32.3%

Entire label © H & J, Inc.

NET CONTENTS ONE GALLON



CAUTION

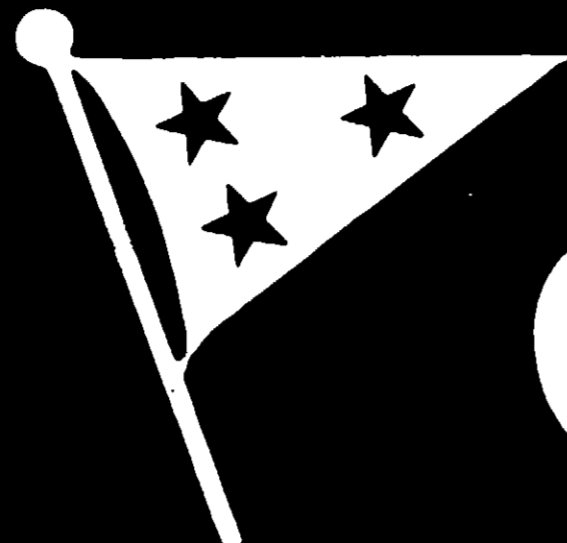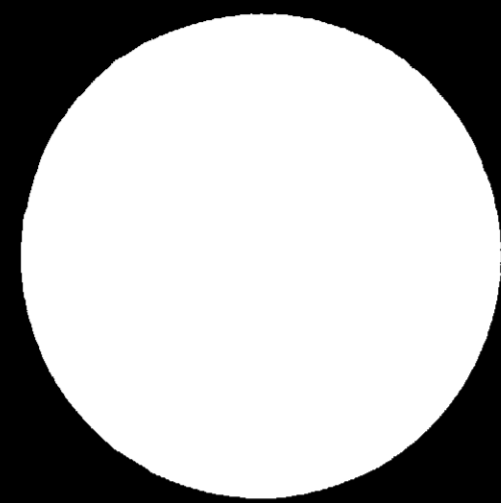

GLOUCESTER



RAPID
DRYING

“COPPERCLAD”

SHIPBOTTOM ANTIFOULING COMPOSITION
FOR WOODEN OR STEEL HULLS



EASY
BRUSHING

Entire label © H & J Inc.

ACTIVE INGREDIENT	
Cuprous Oxide	36.3%
INERT INGREDIENTS	63.7
	100.0%

507-RED

Total copper metal
(from cuprous oxide) 32.3%

NET CONTENTS ONE GALLON

CAUTION

KEEP OUT OF REACH OF CHILDREN
SEE BACK PANEL FOR ADDITIONAL DIRECTIONS



**POSITIVE
ANTIFOULING**



**GUARANTEED
PERFORMANCE**

349234 ACCEPTED



DIRECTIONS

Stir paint thoroughly before using. Stir occasionally while applying. Old paint other than "Copperclad" should be scraped off as thoroughly as practicable before painting. Apply two coats, allowing a minimum of four hours drying time between coats and before launching.

On wood bottoms, no primer is necessary under Copperclad. On steel bottoms apply 2 coats of 407 or 415 Primer, in accordance with directions for that material, before painting. To insure adhesion to fiberglass bottoms, prime bare fiberglass with B370 Epoxy Primer prior to original application of Copperclad.

WARRANTY

This paint is sold under an absolute and unconditional guarantee of satisfactory performance. When applied according to directions, it will keep shipbottoms clean for a period of *at least six months in salt water.*

Dealers are authorized to refund the full purchase price if these conditions are not fulfilled.

CAUTION - FLAMMABLE

Keep away from heat and open flame

THIS PAINT CONTAINS COPPER AND OTHER COMPOUNDS HARMFUL if swallowed and it is sold for use ONLY on ship and boat bottoms for the prevention of marine fouling. Do not use it in any household application. Avoid breathing vapor or spray mist and contact with skin. Wash immediately with soap and water in case of contact with skin. Use protective mask when dry-sanding. Avoid contamination of feed and foodstuffs.


Keep container closed when not in use. Keep out of reach of children.

USE WITH ADEQUATE VENTILATION.

U.S.D.A. Registration No. 3482-29

GP Form No. 507-371

GLOUCESTER PAINTS INC , GLOUCESTER, MASS 01

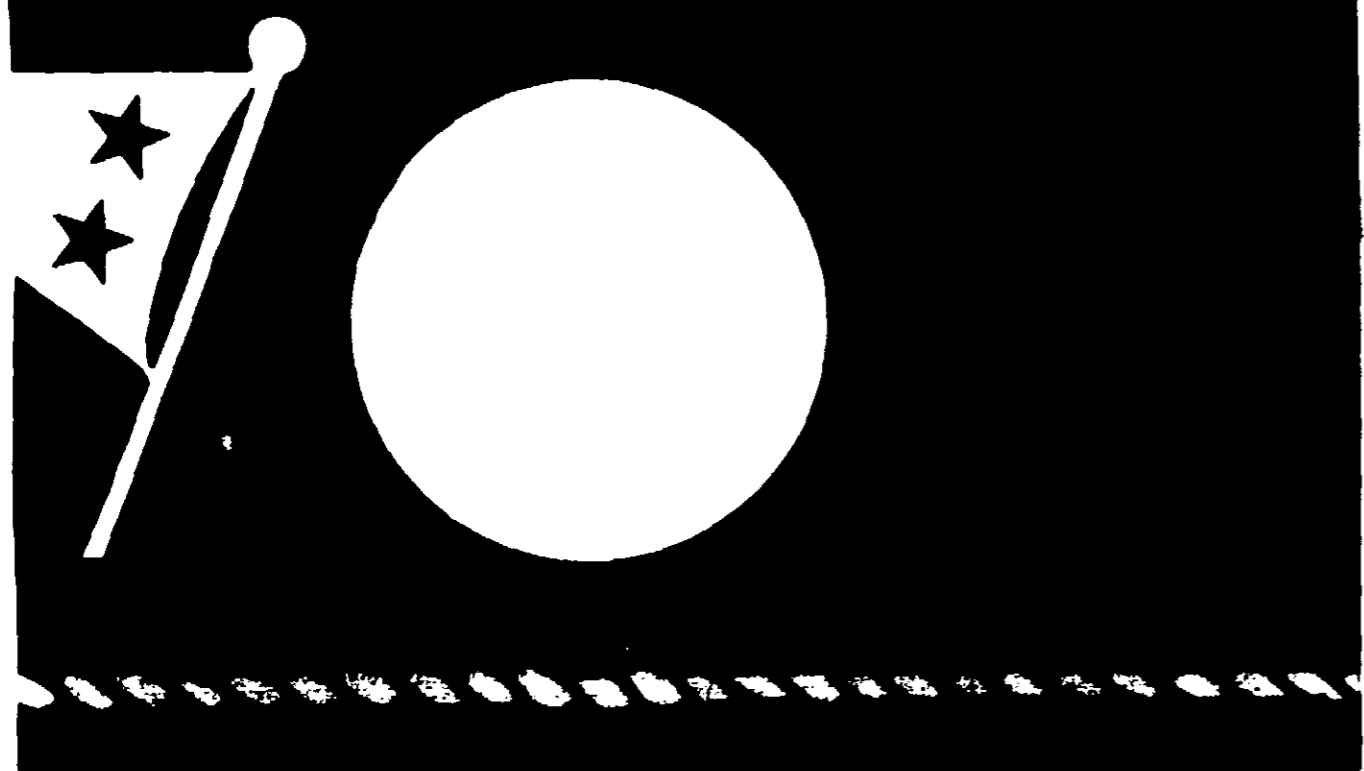

POSITIVE ANTIFOULING

DIRECTIONS

Stir paint thoroughly before using. Stir occasionally while applying. Old paint other than "Copperclad" should be scraped off as thoroughly as practicable before painting.

Apply two coats, allowing a minimum of four hours drying time between coats and before launching.

On wood bottoms, no primer is necessary under Copperclad. On steel bottoms apply 2 coats of 407 or 415 Primer, in accordance with directions for that material, before painting. To insure adhesion to fiberglass bottoms, prime bare fiberglass with B370 Epoxy Primer prior to original application of Copperclad.

WARRANTY

This paint is sold under an absolute and unconditional guarantee of satisfactory performance. When applied according to directions, it will keep shipbottoms clean for a period of *at least six months in salt water*.

Dealers are authorized to refund the full purchase price if these conditions are not fulfilled.

CAUTION - FLAMMABLE

Keep away from heat and open flame

THIS PAINT CONTAINS COPPER AND OTHER COMPOUNDS HARMFUL if swallowed and it is sold for use ONLY on ship and boat bottoms for the prevention of marine fouling. Do not use it in any household application. Avoid breathing vapor or spray mist and contact with skin. Wash immediately with soap and water in case of contact with skin. Use protective mask when dry-sanding. Avoid contamination of feed and foodstuffs.

Keep container closed when not in use. Keep out of reach of children.

USE WITH ADEQUATE VENTILATION.

U.S.D.A. Registration No. 3482-29

GP Form No. 507-371

3482-29
**GUARANTEED
PERFORMANCE**

ACCEPTED

Apr 6 1971

UNDER THE FEDERAL INHERITANCE
EXERCISES IDENTIFICATION ACT
PERSON REGISTER

GLOUCESTER PAINTS INC GLOUCESTER MASS 01