

# GLOUCESTER



FOR PRIMED  
FIBERGLASS BOTTOMS

SHIPBOTTOM

## ANTIFOULING PAINT

ACTIVE INGREDIENTS	
Copper Powder	17.6%
Cuprous Oxide	9.8
INERT INGREDIENTS	
	72.6
	<u>100.0%</u>

*3482-32*  
\*Total Copper as Metallic  
(from Cuprous Oxide  
and Copper Powder)  
26.1%

**ACCEPTED**  
*July 17 1971*  
UNDER THE FEDERAL INSECTICIDE  
FUNGICIDE AND HERBICIDE ACT  
FOR ECONOMIC POISON REGISTERED  
ED UNDER NO. ... SUBJECT  
TO ATTACHED CONDITIONS.

### 512<sup>c</sup> BRONZE

NET CONTENTS ONE GALLON

NOT RECOMMENDED  
FOR METAL BOTTOMS

## CAUTION



FOR PRIMED  
FIBERGLASS BOTTOMS

SHIPBOTTOM

# ANTIFOULING PAINT



ACTIVE INGREDIENTS	
Copper Powder	17.6%
Cuprous Oxide	9.8
INERT INGREDIENTS	72.6
	<hr/> 100.0%


Total Copper as Metallic	26.1%
(from Cuprous Oxide	
and Copper Powder)	

**512<sup>c</sup> BRONZE**

NOT RECOMMENDED  
FOR METAL BOTTOMS

NET CONTENTS ONE GALLON

**CAUTION** KEEP OUT OF REACH OF CHILDREN  
SEE BACK PANEL FOR ADDITIONAL CAUTIONS

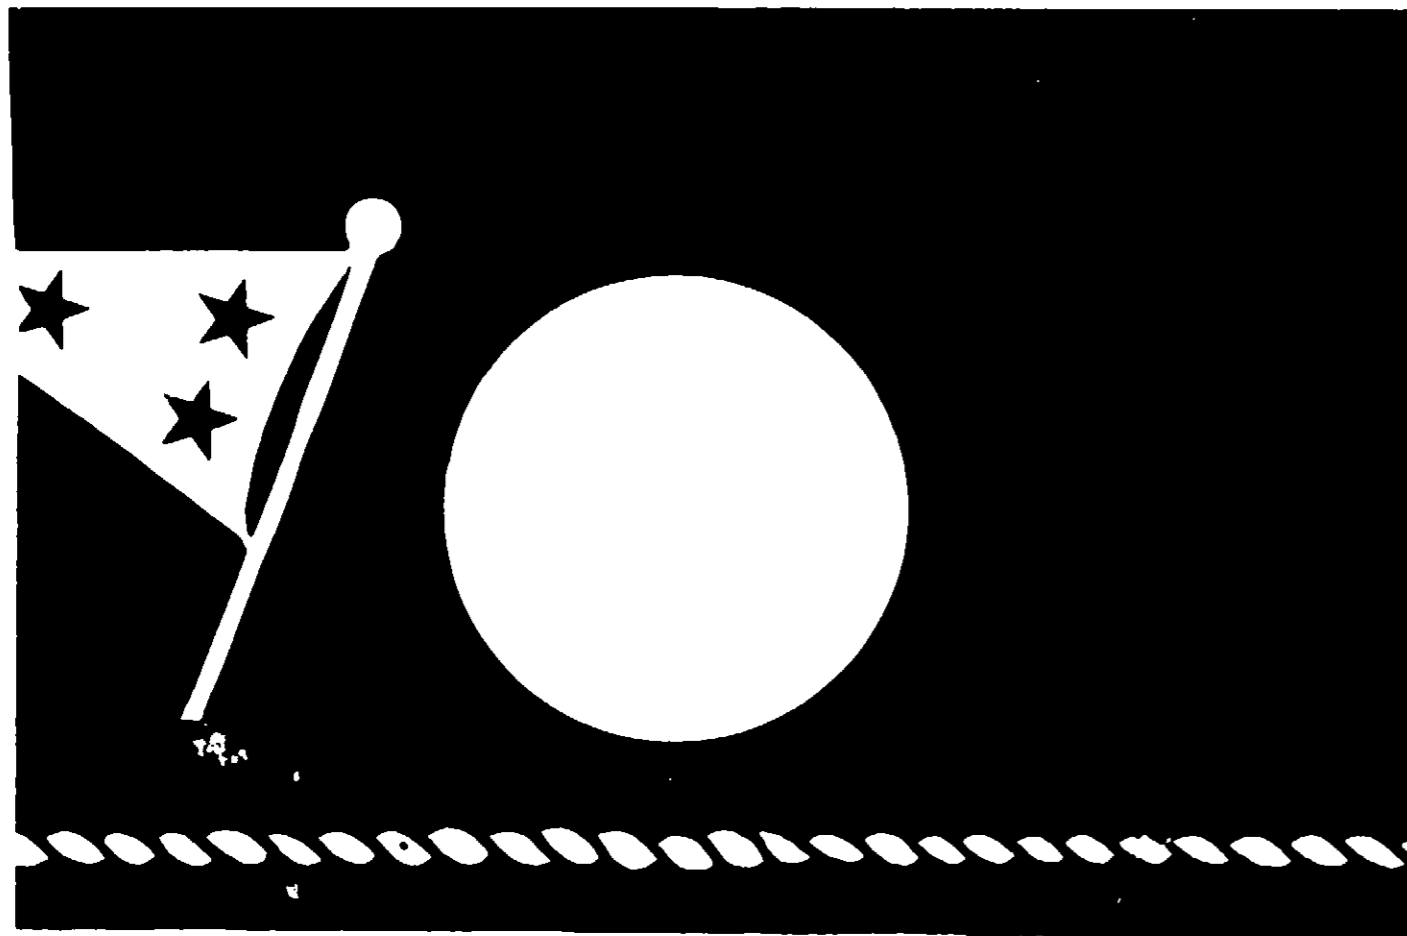

3482-37  
**FOR WOOD  
BOAT BOTTOMS**

**ACCEPTED**  
NOV 10 1964  
F. W. ...

**FOR PREVENTION  
OF MARINE FOULING**

### DIRECTIONS FOR USE

Previously painted bottoms on which the old paint is in good condition and firmly attached may be recoated after sanding of all loose dirt. Where old paint is loose and flaking in large areas, strip it off and proceed as for new unpainted work.

#### NEW AND STRIPPED WORK

This copper paint can be applied directly to wood bottoms after sanding smooth. To insure adhesion to fiberglass bottoms, they should be primed with one coat of B370 Epoxy Primer, in accordance with directions for that material, before applying copper paint. Not for use on metal boats.

Stir copper paint thoroughly with a flat paddle before using and during application. Apply two coats to clean, dry surface and allow at least 4 hours drying time between coats and before launching. Thin only if absolutely necessary to restore free brushing consistency. A little turpentine or paint thinner, well stirred in, can be used for this purpose and for cleaning brushes and equipment. Add no other materials.

### CAUTION - FLAMMABLE

*Keep away from heat and open flame.*

THIS PAINT CONTAINS COPPER AND OTHER COMPOUNDS HARMFUL if swallowed and it is sold for use ONLY on ship and boat bottoms for the prevention of marine fouling. Do not use it in any household application. Avoid breathing vapor or spray mist and contact with skin. Wash immediately with soap and water in case of contact with skin. Use protective mask when dry-sanding. Avoid contamination of feed and foodstuffs.

Keep container closed when not in use. Keep out of reach of children.


#### USE WITH ADEQUATE VENTILATION.

U.S.D.A. Registration No. 3482-32

GP Form 512-571

Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.

**GLOUCESTER PAINTS, INC., GLOUCESTER, MASS. 01930**

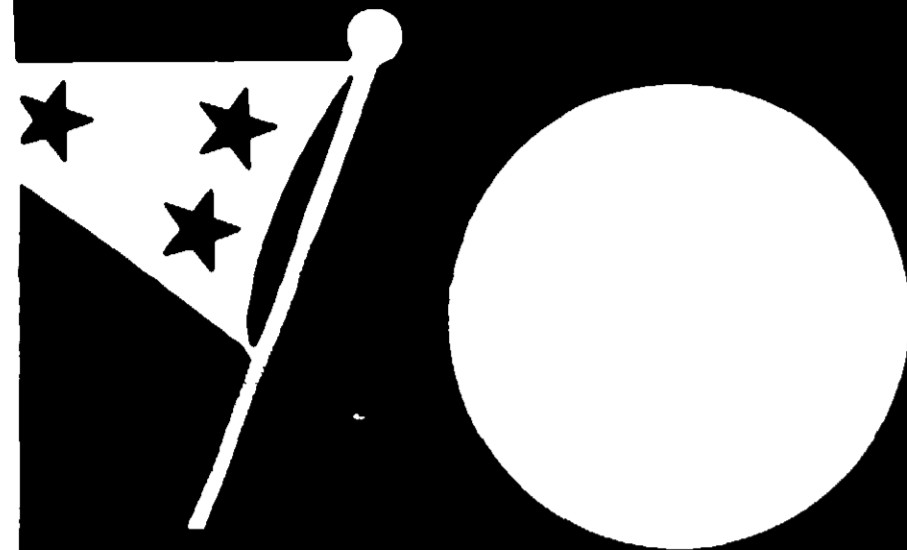

3482-32  
**FOR WOOD  
BOAT BOTTOMS**

**ACCEPTED**

May 17 1971

UNDER THE FEDERAL INSECTICIDE  
FUNGICIDE AND RODENTICIDE ACT  
FOR LAUNCHING

**FOR PREVENTION  
OF MARINE FOULING**

### DIRECTIONS FOR USE

Previously painted bottoms on which the old paint is in good condition and firmly attached may be recoated after sanding off all loose dirt. Where old paint is loose and flaking in large areas, strip it off and proceed as for new unpainted work.

#### NEW AND STRIPPED WORK

This copper paint can be applied directly to wood bottoms after sanding smooth. To insure adhesion to fiberglass bottoms, they should be primed with one coat of B370 Epoxy Primer, in accordance with directions for that material, before applying copper paint. Not for use on metal boats.

Stir copper paint thoroughly with a flat paddle before using and during application. Apply two coats to clean, dry surface and allow at least 4 hours drying time between coats and before launching. Thin only if absolutely necessary to restore free brushing consistency. A little turpentine or paint thinner, well stirred in, can be used for this purpose and for cleaning brushes and equipment. Add no other materials.

### CAUTION - FLAMMABLE

*Keep away from heat and open flame*

**THIS PAINT CONTAINS COPPER AND OTHER COMPOUNDS HARMFUL** if swallowed and it is sold for use **ONLY** on ship and boat bottoms for the prevention of marine fouling. Do not use it in any household application. Avoid breathing vapor or spray mist and contact with skin. Wash immediately with soap and water in case of contact with skin. Use protective mask when dry-sanding. Avoid contamination of feed and foodstuffs.

Keep container closed when not in use. Keep out of reach of children.

#### USE WITH ADEQUATE VENTILATION.

U.S.D.A. Registration No. 3482-32

GP Form 512-571

Do not reuse empty container. Destroy it by perforating or crushing.  
Bury or discard in a safe place.

**GLOUCESTER PAINTS, INC., GLOUCESTER, MASS. 01930**