



ONE QUART U.S. MEASURE





# GLOUCESTER SEA JACKET®



## MARINE


## PAINTS

ACTIVE INGREDIENTS*	
Cuprous Oxide	35.27%
Metallic Copper	2.56
INERT INGREDIENTS	62.17
	100.00%
*Copper Metal Equivalent	34.0%

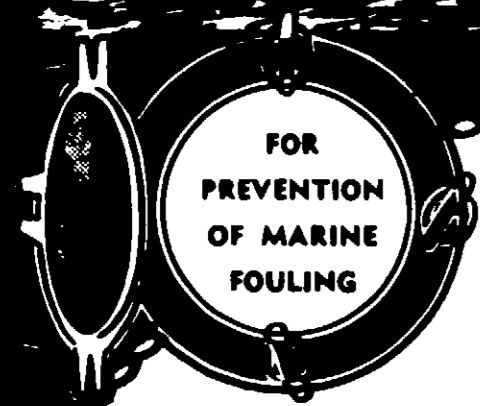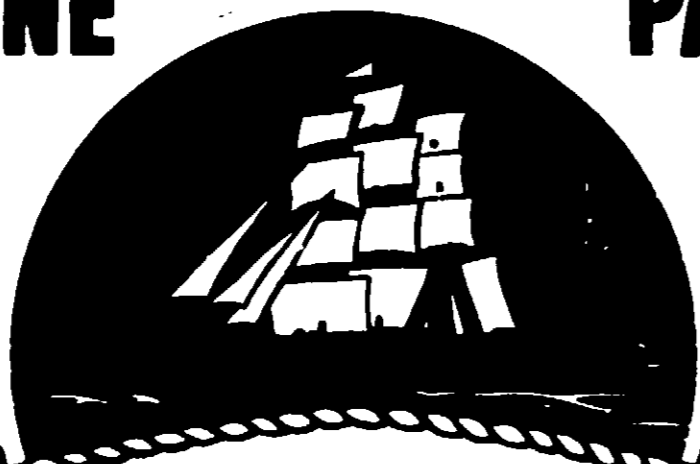

PREMIUM QUALITY  
SHIPBOTTOM  
**ANTIFOULING PAINT**

**541-GREEN**

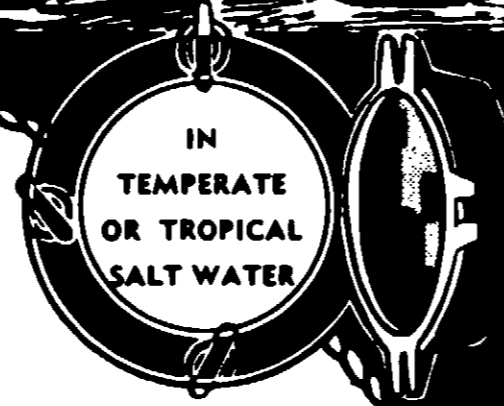

**ACCEPTED**  
*October 9, 1973*  
UNDER THE FEDERAL INSECTICIDE  
FUNGICIDE AND RODENTICIDE ACT  
FOR ECONOMIC POISON REGISTERED  
UNDER NO. *3482-35*

Do not reuse container.  
Destroy when empty.

Do not contaminate water  
by cleaning of equipment  
or disposal of waste.

This is a hard-finish paint which has not only remarkable antifouling properties, but excellent adhesion, erosion resistance, and long life as well. These characteristics recommend it for boats of high speed requiring superior adhesion and erosion resistance; boats in the water year-round, where long life is important; and sailing and other craft where smoothness and least frictional resistance is desired.

### DIRECTIONS FOR USE

Previously painted bottoms on which the old paint is in good condition and firmly attached may be recoated after sanding off all loose dirt. Where old paint is loose and flaking in large areas, strip it off and proceed as for new unpainted work.

### NEW AND STRIPPED WORK

This copper paint can be applied directly to wood bottoms after sanding smooth. To insure adhesion to fibreglass bottoms, they should be primed with one coat of B370 Epoxy Primer, in accordance with directions for that material, before applying copper paint. Prime steel bottoms with two coats 407 Shipbottom Primer, and aluminum bottoms with two coats 410 Q. D. Green, before using copper paint. Steel or aluminum can also be primed with 415 Primer.

Stir copper paint thoroughly with a flat paddle before using and during application. Apply two coats to clean, dry surface and allow at least 4 hours drying time between coats and before launching. Thin only if absolutely necessary to restore free brushing consistency. Use denatured alcohol for thinning if required, and for cleaning brushes and equipment. Add no other materials.

### CAUTION - FLAMMABLE

*Do not use, pour, spill or store near heat or open flame.*

THIS PAINT CONTAINS COPPER AND OTHER COMPOUNDS HARMFUL if swallowed and it is sold for use ONLY on ship and boat bottoms for the prevention of marine fouling. Do not use it in any household application. Avoid breathing vapor or spray mist and contact with skin. Wash immediately with soap and water in case of contact with skin. Use protective mask when dry-sanding. Avoid contamination of feed and foodstuffs.

Keep container closed when not in use. Keep out of reach of children.

**USE WITH ADEQUATE VENTILATION.**

E.P.A. Registration No. 3482-35

GP Form 541-873

**CAUTION** KEEP OUT OF REACH OF CHILDREN  
SEE BACK PANEL FOR ADDITIONAL CAUTIONS

**GLOUCESTER PAINTS, INC., GLOUCESTER, MASS. 01930**

**ACCEPTED**

*Oct 9, 1973*

UNDER THE FEDERAL INSECTICIDE  
FUNGICIDE AND RODENTICIDE ACT  
FOR ECONOMIC POISON REGISTERED  
UNDER NO. *3482-35*