


ONE U.S. STANDARD GALLON

IMPERIAL MEAS. 132 FL. OZ.

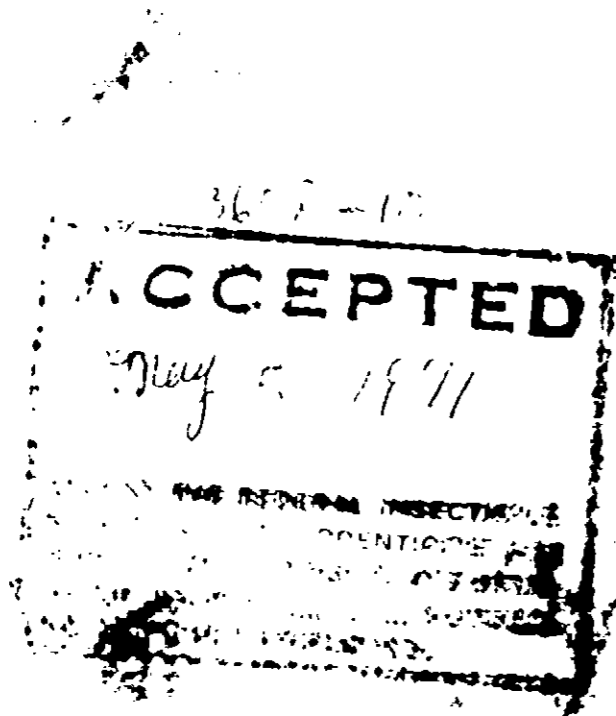

DOLPHINITE®

COOLING

WITH
NON-FLUORIDE
ANTI-CORROSION



DANGER!
**KEEP OUT OF REACH
OF CHILDREN**

See back panel
for additional
DANGERS

9305
Red

9305 RED	
Pigment:	13.45%
55.8% Toluidine Red	
42.0% Tri-butyltin Fluoride	
2.2% Inert	
Vehicle:	18.05%
Vinyl Resin — 8.13%	
Rosin — 9.00%	
Diocetyl Phthalate — .92%	
Volatile:	68.50%
57% Ketones	
43% Aromatic Thinner	
	100.00%
Active Ingredients:	By Weight
Tri-butyltin Fluoride	5.65%
Inert Ingredients:	94.35%
	100.00%
(Tin as metallic 2.18%)	

NET CONT. 128 FL. OZS. (1 GAL.)

MANUFACTURED BY **THE DOLPHIN PAINT & CHEMICAL COMPANY** TOLEDO, OH

"DO IT RIGHT - WITH Dolfinite"

INSTRUCTIONS FOR USE

DOLFINITE COLORPAC ANTI-FOULING PAINT is a new bottom coating designed for control of many marine organisms. This paint is based on bioMeT*, a new powerful anti-fouling ingredient. It can be applied to fiberglass, wood, aluminum and steel hulls. Recoating is possible in three or four hours, but paint should be allowed to dry overnight before boat launching. Apply the paint liberally with a full brush or enamel-type roller. **DO NOT SPRAY.**

FIBERGLASS HULLS. Remove all mold release agents by wiping thoroughly with a suitable solvent (Xylol); sand thoroughly with medium grade sandpaper and apply two coats of Colorpac. For painting over old work, follow instructions for recoating wood.

WOODEN HULLS: On new wood, apply two full coats directly to the wooden surface. On old work, Colorpac anti-fouling paint may be applied over clean, dry, firm surfaces provided the previous paint was a vinyl or epoxy type. All other types of paints should be removed to the bare wood.

METAL HULLS: Aluminum should be etched with Alumiprep, coated with a wash coat primer system (Dolfinite 9660-9661) and then two coats of Colorpac. Steel should be cleaned by sandblasting or grinding, treat with Metalprep and followed by two coats of Colorpac. Apply Colorpac by roller or brush. **DO NOT SPRAY.**

**DANGER! MAY CAUSE SEVERE EYE BURNS. MAY BE FATAL
IF SWALLOWED. MAY CAUSE SKIN IRRITATION.**

Do not get in eyes, on skin, or on clothing. Avoid breathing of vapor or spray mist. Keep away from heat, sparks and open flame. Use with adequate ventilation. Close container after each use.

May cause severe eye damage. Wear goggles or face shield when using. In case of contact, immediately flush eyes with plenty of water for at least fifteen minutes and get prompt medical attention; wash skin with plenty of soap and water. Wash contaminated clothing before re-use. **If swallowed, CALL PHYSICIAN IMMEDIATELY.**

U.S.D.A. Registration No. 3658-10

