


5 11 17 70

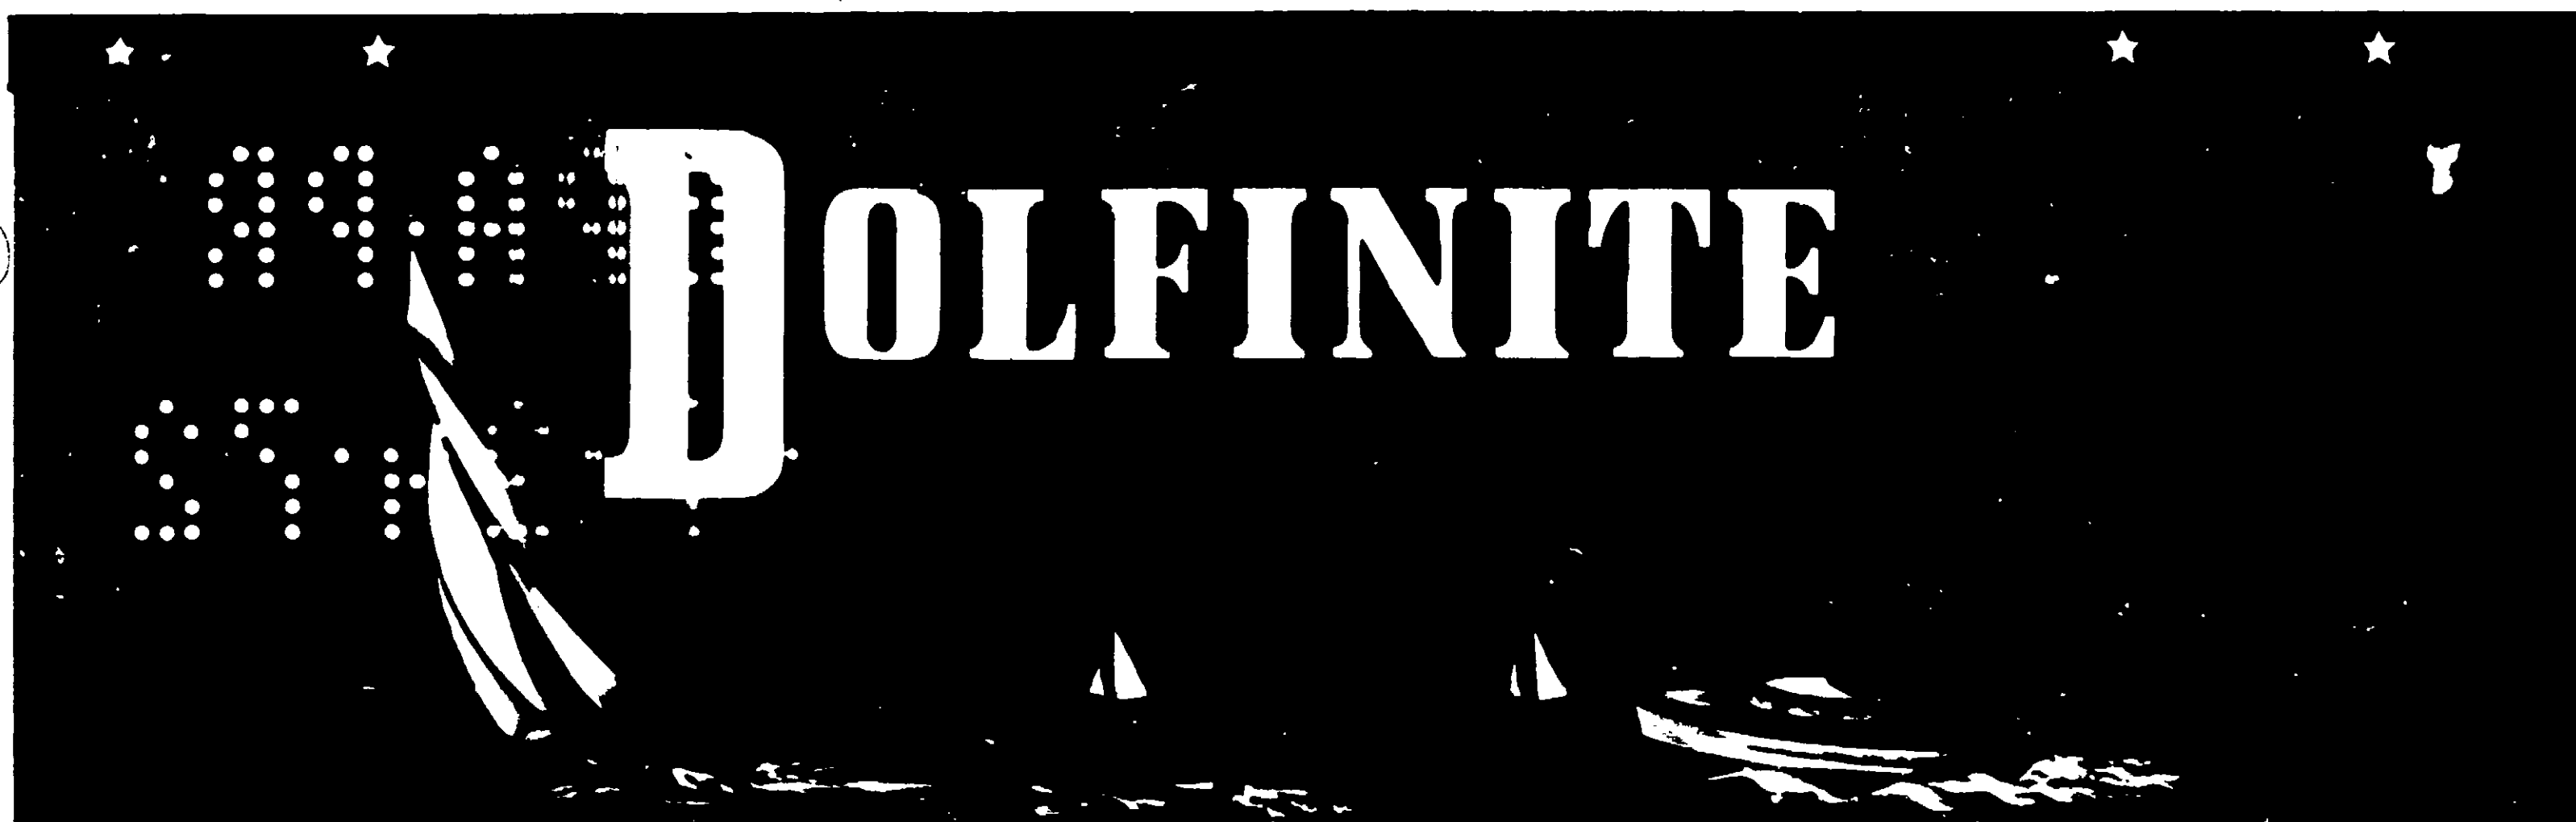

CAUTION!
KEEP OUT OF REACH
OF CHILDREN
See back panel for
additional required
caution statements.

3394
Anti-Fouling
Transducer Paint
NET CONT. 32 FL. OZ. (1 QT.)

3394 ANTI-FOULING
TRANSDUCER PAINT

Active Ingredients	By Weight
Cuprous Oxide *	58.88%
Inert Ingredients	41.12%
	<hr/>
	100.0%

*Copper Expressed As Metallic 50.5%

MANUFACTURED BY **THE DOLPHIN PAINT & CHEMICAL COMPANY** TOLEDO, OHIO 43603 U S A

ACCEPTED

Aug 28, 1972

UNDER THE FEDERAL INSECTICIDE
FUNGICIDE AND RODENTICIDE ACT
EPA REG. NO. 3658-18
NEW YORK, N.Y. 10013
U.S. DEPT. OF AGRICULTURE

★ ★ ★ QUALITY PRODUCTS SINCE 1885 ★ ★

TE



**3394 ANTI-FOULING
TRANSDUCER PAINT**

Active Ingredients	By Weight
Cuprous Oxide *	58.88%
Inert Ingredients	41.12%
	<hr/>
	100.0%

*Copper Expressed As Metallic 50.5%

Paint
T.)

DOLFINITE 3394 TRANSDUCER ANTI-FOULING PAINT

Dolfinite Anti-Fouling Transducer paint is designed to prevent growth of barnacles and other marine organisms on your transducer.

DIRECTIONS FOR APPLICATION

Shake contents thoroughly and stir frequently while using to insure even and complete distribution of the anti-fouling ingredients. Thinning is not required nor recommended.

The transducer should be sanded lightly and wiped clean with either mineral spirits or turpentine. Apply two coats, allowing four hours drying time between coats. Can be launched at any time, wet or dry.

CAUTION: Contains Xylol and Copper. Keep away from heat, sparks and open flame. Avoid contact with skin and breathing of vapor and spray mist. Close container after each use. Do not reuse container. Destroy when empty.

Use with adequate ventilation. If swallowed, DO NOT induce vomiting. Call Physician Immediately.

KEEP OUT OF REACH OF CHILDREN

REGISTRATION NO. 3658-18

PANY TOLEDO, OHIO 43603 U S A

" DO IT RIGHT - WITH *Dolfinite* "