

★ ★ ONE U.S. STANDARD GALLON

IMPERIAL MEAS. 132 FL. OZ. ★ ★

DOLFINITE



WARNING! COMBUSTIBLE!

HARMFUL OR FATAL IF SWALLOWED

KEEP OUT OF THE REACH OF CHILDREN

See cautions elsewhere on label

NET CONT. 128 FL. OZS. (1 GAL.)

4056 Dolfinite Black Bottom Paint

7-71
7-20

4056 DOLFINITE BLACK

Active Ingredients:	24.7%
Cuprous Oxide—24.7%	
Inert Ingredients:	75.3%
<hr/>	
Pigments:	53.7%
Cuprous Oxide —24.7%	
Carbon Black - Ground Shale—29.0%	
Vehicle:	15.3%
Phenolic Resin, Ester Gum, Hardened Rosin, Tung & Linseed Oils.	
Volatile:	31.0%
Aromatic —15.4%	
Aliphatic —84.6%	
<hr/>	
Copper as Metallic — 21.2%	100.0%


MANUFACTURED BY THE DOLPHIN PAINT & CHEMICAL COMPANY TOLEDO 3, OHIO, U.S.A.

IMPERIAL MEAS. 132 FL. OZ



QUALITY PRODUCTS SINCE 1885

DOLFINITE

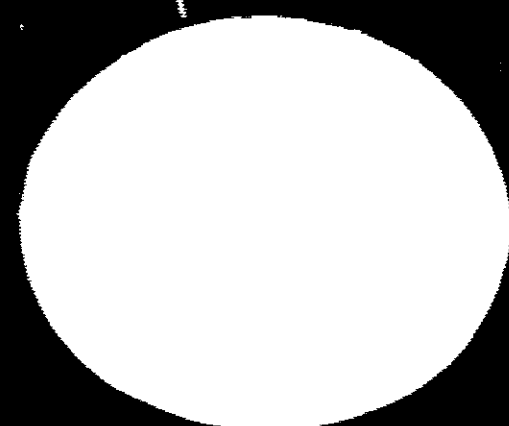

Dolfinite Black Bottom Paint

4056 DOLFINITE BLACK

Active Ingredients:	24.7%
Cuprous Oxide—24.7%	
Inert Ingredients:	75.3%
	<hr/>
	100.0%
Pigments:	53.7%
Cuprous Oxide —24.7%	
Carbon Black - Ground Shale—29.0%	
Vehicle:	15.3%
Phenolic Resin, Ester Gum, Hardened Rosin, Tung & Linseed Oils.	
Volatile:	31.0%
Aromatic —15.4%	
Aliphatic —84.6%	
	<hr/>
	100.0%
Copper as Metallic — 21.2%	

4056 BLACK BOTTOM PAINT

Dolfinite Black Bottom Paint is unique in that it is consistent in performance in all places and seasons, and has a controlled toxic release and leeching rate, which are constant and above the critical rate at all times. Can be applied during storage in anticipation of early launching. Boats should be scrubbed with a stiff brush and fresh water immediately upon removal from the water to remove the bacterial slime before it oxidizes and thereby protect the anti-fouling qualities.

DIRECTIONS FOR APPLICATION—Is easily applied by brush, roller or spray and dries to a smooth, flat black film. Shake thoroughly before and stir frequently while using to insure even and complete distribution of the anti-fouling ingredients.

THINNING IS NOT RECOMMENDED OR REQUIRED. Should a partially used can require thinning, add only a small amount of pure gum turpentine—any other material may completely destroy the effectiveness.

WOOD—The surface should be clean, dry and well sanded. No undercoat is required. Apply two coats to insure complete protection; both coats may be applied during the same day allowing 4 hours drying time between coats. Allow 24 hours air dry before launching.

SUGGESTION—For added protection we suggest a coat of Dolfinite Wormicide, which contains Biomet, be applied directly to the bare wood before the application of 4056. This will insure protection from marine worms, borers, teredos or other marine growth in the event of mars, scrapes or scuffs.

FIBERGLASS—Fiberglass must be thoroughly and carefully cleaned of all waxes, mold release agents, etc., by cleaning thoroughly with a strong solvent; sand vigorously to provide a roughened surface for good adhesion. No undercoater is required—apply two coats allowing 4 hours between coats. Allow 24 hours air dry before launching.

STEEL and ALUMINUM—Steel and aluminum boats require a complete system of anti-corrosive and galvanic protection barrier coats prior to the application of 4056.

BRUSHES—May be cleaned with turpentine or mineral spirits.

CAUTION: CONTAINS XYLOL AND COPPER

Keep away from heat, sparks and open flame. Avoid contact with skin and breathing of vapor or spray mist. Close container after each use. If swallowed, do not induce vomiting — CALL PHYSICIAN IMMEDIATELY. Use with adequate ventilation.

KEEP OUT OF REACH OF CHILDREN

U.S. D.A. Registration No. 3658-20

ICAL COMPANY TOLEDO 3, OHIO, U.S.A.

DO IT RIGHT - WITH *Dolfinite*