





ONE U.S. STANDARD GALLON

IMPERIAL MEAS. 132 FL. OZ.

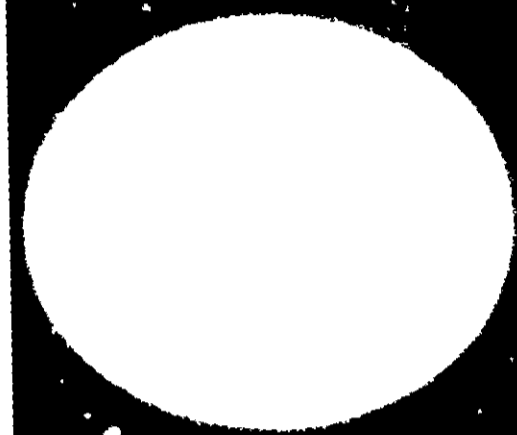

DOLFINITE

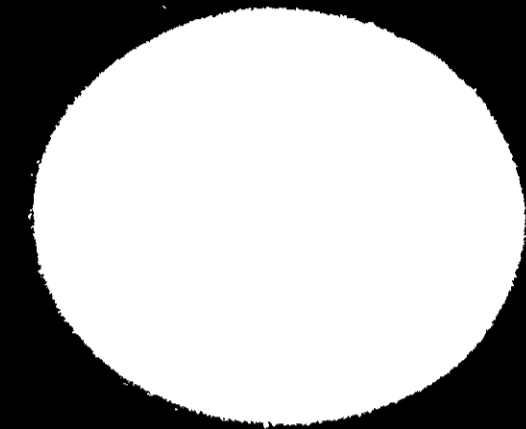

WARNING! COMBUSTIBLE!

HARMFUL OR FATAL IF SWALLOWED

KEEP OUT OF THE REACH OF CHILDREN

SEE CAUTIONS ELSEWHERE ON LABEL

4049 Dolfinite Green Bottom Paint

4-15-71
3657-21

NET CONT. 128 FL. OZS. (1 GAL.)

4049 DOLFINITE GREEN

Active Ingredients:	48.7%
Cuprous Oxide—48.7%	
Inert Ingredients:	51.3%
	<hr/>
Pigments:	100.0%
Cuprous Oxide—48.7%	
Chrome Greens, Titanium Dioxide, Magnesium Silicate—21.0%	69.7%
Vehicle:	10.0%
Phenolic Resin, Ester Gum, Hardened Rosin, Tung & Linseed Oils.	
Volatile:	20.3%
Aromatic —26.4%	
Aliphatic —56.4%	
Turpentine—17.2%	
	<hr/>
Copper as Metallic — 42%	100.0%

MANUFACTURED BY **THE DOLPHIN PAINT & CHEMICAL COMPANY** TOLEDO 3, OHIO, U.S.A.

★ ★ QUALITY PRODUCTS SINCE 1885 ★

4049 GREEN BOTTOM PAINT

Dolfinite Green Bottom Paint is unique in that it is consistent in performance in all places and seasons, and has a controlled toxic release and leeching rate, which are constant and above the critical rate at all times. Can be applied during storage in anticipation of early launching. Boats should be scrubbed with a stiff brush and fresh water immediately upon removal from the water to remove the bacterial slime before it oxidizes, and thereby protect the anti-fouling qualities.

DIRECTIONS FOR APPLICATION—Is easily applied by brush, roller or spray and dries to a smooth, flat green film. Shake thoroughly before and stir frequently while using to insure even and complete distribution of the anti-fouling ingredients. **THINNING IS NOT RECOMMENDED OR REQUIRED.** Should a partially used can require thinning, add only a small amount of pure gum turpentine—any other material may completely destroy the effectiveness.

WOOD—The surface should be clean, dry and well sanded. No undercoat is required. Apply two coats to insure complete protection; both coats may be applied during the same day allowing 4 hours drying time between coats. Allow 24 hours air dry before launching.

SUGGESTION—For added protection we suggest a coat of Dolfinite Wormicide, which contains Biomet, be applied directly to the bare wood before the application of 4049. This will insure protection from marine worms, borers, teredos or other marine growth in the event of mars, scrapes or scuffs.

FIBERGLASS—Fiberglass must be thoroughly and carefully cleaned of all waxes, mold release agents, etc. by cleaning thoroughly with a strong solvent; sand vigorously to provide a roughened surface for good adhesion. No undercoater is required—apply two coats allowing 4 hours between coats. Allow 24 hours air dry before launching.

STEEL and ALUMINUM—Steel and aluminum boats require a complete system of anti-corrosive and galvanic protection barrier coats prior to the application of 4049.

BRUSHES—May be cleaned with turpentine or mineral spirits.

CAUTION: CONTAINS XYLOL AND COPPER

Keep away from heat, sparks and open flame. Avoid contact with skin and breathing of vapor or spray mist. Close container after each use. If swallowed, do not induce vomiting.—**CALL PHYSICIAN IMMEDIATELY.** Use with adequate ventilation.

KEEP OUT OF REACH OF CHILDREN

U.S.D.A. Registration No. 3658-21

4049 DOLFINITE GREEN	
Active Ingredients:	48.7%
Cuprous Oxide—48.7%	
Inert Ingredients:	51.3%
	<hr/>
	100.0%
Pigments:	69.7%
Cuprous Oxide—48.7%	
Chrome Greens, Titanium Dioxide, Magnesium Silicate—21.0%	
Vehicle:	10.0%
Phenolic Resin, Ester Gum, Hardened Rosin, Tung & Linseed Oils.	
Volatile:	20.3%
Aromatic —26.4%	
Aliphatic —56.4%	
Turpentine—17.2%	
	<hr/>
	100.0%
Copper as Metallic—42%	

U.S.A.

DO IT RIGHT - WITH *Dolfinite*