




ONE STANDARD GALLON

IMPERIAL MEAS. 132

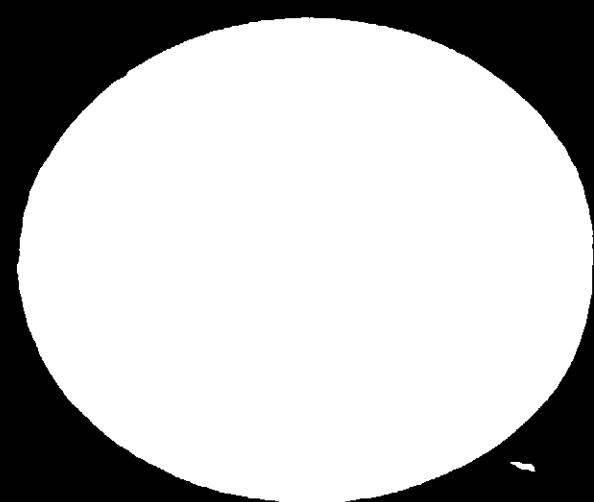

DOLPHIN

66 66

WARNING! COMBUSTIBLE!

MAILED
Mar 26, 1971
3658-27

MAY BE HARMFUL OR FATAL
IF SWALLOWED OR ABSORBED
THROUGH THE SKIN

KEEP OUT OF THE REACH OF CHILDREN

See antidote statement and other warnings
on the back/side panel.

3435-TX Fung Bedding Com

(Mil Spec No. MIL-S-19653)

MANUFACTURED BY THE DOLPHIN PAINT & CHEMICAL COMPANY

QUALITY PRODUCTS SINCE 1885



DOLFINITE 3435-TX FUNGICIDAL BEDDING COMPOUND

DOLFINITE 3435-TX is a heavy bodied compound with fungicidal protection for bedding in keels, transoms, moldings, shaftlog, and deck hardware. It withstands atmospheric conditions without hardening, softening, or oozing.

ADVANTAGES: May be used on wood, fiberglass, or metal wherever two pieces are fitted together and a waterproof, dustproof seal is desired. Will outlast ordinary compounds by years of service. Brown in color. Will not bleed through paint. Paint may be applied over the bedding compound after the surface has acquired a firm skin.

APPLICATION: Usually applied by knife or spatula directly to the crevice or joint in sufficient amount to completely fill all voids and to provide a complete seal against moisture penetration. Normally used without thinning. If thinning is necessary, use a small amount of Dolfinite 1481-TX Compound Thinner. Suitable for waterproofing single planked bottoms. Under the surface it remains soft and flexible.

CAUTION: CONTAINS XYLOL, PENTACHLOROPHENOL AND PETROLEUM DISTILLATE.

Keep away from heat, sparks and open flame. Do not get in eyes on skin or on clothing. Contaminated shoes and clothing should be removed promptly and skin thoroughly washed with soap and water. Use with adequate ventilation. Close container after each use.

ANTIDOTE: If swallowed, DO NOT induce vomiting. Call Physician immediately. **IF ON SKIN:** In case of contact, immediately wash skin with soap and water.

EYES: For eyes, flush with plenty of water for at least 15 minutes and get medical treatment.

USDA Registration No. 3658-27

DO IT RIGHT - WITH *Dolfinite* "

NO. 67011
READY
TO USE

Penta Wood Preservative

WOOD PRESERVATION

Before treatment, all wood should be no more than 15% moisture. Wood should be removed two feet beyond any visible evidence of decay.

For best results, Penta Wood Preservative should be applied so as to effect maximum penetration into the wood and maximum protection against decay.

Application, where possible, in an open tank where the wood is submerged for accomplishing this. At least one minute immersion per inch thickness is recommended for all cases. The wood should be in direct contact with the preservative, as in the case of fence posts, the immersion period should be from 15 to 30 minutes. The posts should be peeled and the preservative absorbed.

For wood which is in treatment, a sprayer or brush application may be used. When the wood will be in direct contact with the ground, several brush applications should be given.

Preservative should be allowed to dry at least 48 hours before painting. Estimated coverage: 5 to 10 gallons per 1000 board feet for open treatment and 200 square feet per gallon for brush application.

For further information, see the literature on this product, including the following:

KEEP OUT OF REACH OF CHILDREN
This product is toxic to fish and other aquatic life. Do not discharge into any body of water. Do not use as a fertilizer. Do not use as a soil conditioner. Do not use as a weed killer. Do not use as a disinfectant. Do not use as a preservative for other materials. Do not use as a preservative for other materials.

COMBUSTIBLE

Do not use, pour, spill or store near heat or open flame.

ACCEPTED
JUL 30, 1973
UNDER THE FEDERAL INSECTICIDE AND RODENTICIDE ACT FOR ECONOMIC POISON REGISTERED UNDER NO. 3309-1

NO. 67011
READY
TO USE

Penta Wood Preservative

OIL WOOD PRESERVATIVE FOR CLEAN TREATMENT OF LUMBER, MILLWORK, PLYWOOD, AND OTHER FOREST PRODUCTS. PENETRATING AND PAINTABLE. SLIGHT PETROLEUM OIL.

ASSAY

ACTIVE INGREDIENTS:	
PENTACHLOROPHENOL	- - - 4.3%
OTHER CHLOROPHENOLS AND RELATED COMPOUNDS	- - 0.5%
PETROLEUM HYDROCARBONS	- 92.3%
INERT INGREDIENTS	- - - 2.9%
	100.0%

Penta Wood Preservative is a clear liquid for protecting wood against decay, insect growths which cause rot and structural damage, termites, lyctus (powder post) beetle, carpenter ants. Penta Wood Preservative is effective in termite control, borate wood preservative and as a soil preservative. Penta Wood Preservative conforms to the Standard established by the Western Pine Association for wood preservative and to the Standard established by the National Woodwork Manufacturers Association.

DO NOT REUSE EMPTY CONTAINERS. PREPARE BY PREPARATION OF THE PRODUCT. KEEP OUT OF REACH OF CHILDREN. KEEP AWAY FROM WATER. DO NOT DISCHARGE INTO ANY BODY OF WATER. DO NOT USE AS A FERTILIZER.



FORTRES

PRODUCTS FOR BUILDING AND INDUSTRIAL USE

WARNING
See Warning On Pack Panel
KEEP OUT OF REACH OF CHILDREN

NET CONTENTS