

PM 33 3931-7 2-5-98 10/3

Acceptance stamp on pg. 3 of 3

**PRECAUTIONARY STATEMENTS  
HAZARD TO HUMANS AND DOMESTIC ANIMALS**

**DANGER**

**CORROSIVE**  
CAUSES EYE DAMAGE AND SKIN BURNS.  
MAY CAUSE ALLERGIC SKIN REACTION.  
MAY BE HARMFUL IF INHALED.  
MAY BE FATAL IF SWALLOWED  
OR ABSORBED THROUGH THE SKIN.

Do not get in eyes, on skin, or on clothing.  
Wear goggles or face shield  
and rubber gloves when handling.  
Avoid breathing vapor or mist. Avoid contamination of food.  
Do not take internally. Wash thoroughly after handling.

**ENVIRONMENTAL HAZARDS**

This product is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

**Conditions of Sale and Warranty:** Seller warrants that the product conforms to its chemical description and is reasonably fit for the purpose stated on the label when used in accordance with directions under normal conditions of use, but neither this warranty nor any other warranty of merchantability or fitness for a particular purpose, express or implied, extends to the use, storage or handling of this product in a manner other than as directed by label instructions, or under abnormal conditions, or under conditions not reasonably foreseeable to seller, and buyer assumes the risk of any such use.

- EPA Est. No. 3931-GA-1
- EPA Est. No. 3931-TN-1
- EPA Reg. No. 3931-7
- Net Contents**



**SUPERIOR WATER-TREATING SERVICE**

**ANCOCIDE 4070**

INDUSTRIAL MICROBICIDE FOR USE IN RECIRCULATING WATER COOLING TOWERS AND AIR WASHER SYSTEMS

**ACTIVE INGREDIENT:**

5-CHLORO-2-METHYL-4-ISOTHIAZOLIN-3-ONE .....	11.1%
2-METHYL-4-ISOTHIAZOLIN-3-ONE .....	0.39%
<b>INERT INGREDIENTS .....</b>	<b>98.50%</b>
<b>TOTAL .....</b>	<b>100%</b>

ANCOCIDE 4070 Weighs 8.4 lbs. per Gallon

**KEEP OUT OF REACH OF CHILDREN**

**DANGER**

**STATEMENT OF PRACTICAL TREATMENT**

- If swallowed:** Do not induce vomiting. Drink promptly a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Never give anything by mouth to an unconscious person. Avoid alcohol. Call a physician immediately.
- If inhaled:** Remove immediately to fresh air. If not breathing, apply artificial respiration. If breathing is difficult, give oxygen. Call a physician.
- If on skin:** Wash thoroughly with soap and water. Remove and wash contaminated clothing before reuse.
- If in eyes:** Flush with plenty of water for at least 15 minutes. Call a physician.
- Note to physician:** Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression and convulsions may be needed.

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

Anderson Chemical Company, Inc. P.O. Box 4507  
Macon, Georgia 31213 Fax (912) 742-6332

Other Locations:

- Macon (912) 745-0466
- Memphis (901) 948-0451
- Dallas (214) 638-1526
- Miami (305) 887-8700

Subject to limitations of warranty and liability as stated in the Company's Standard Condition of

2043

### DIRECTIONS FOR USE

#### GENERAL CLASSIFICATION

It is in violation of Federal Law to use this product in a manner inconsistent with its labeling.

#### INDUSTRIAL RECIRCULATING WATER COOLING TOWERS

For the control of bacteria, algae and fungi, add ANCOCID 4070 to the tower basin, distribution box or some other point to ensure uniform mixing.

**INITIAL DOSE:** When the system is noticeably fouled, apply 148 to 883 ppm ANCOCID 4070 (1.26 to 7.46 pounds or 19 to 113 fluid ounces of ANCOCID 4070 per 1000 gallons of water in the system). Repeat until control is achieved.

**SUBSEQUENT DOSE:** When microbial control is evident, add 35 to 219 ppm ANCOCID 4070 (0.3 to 1.86 pounds or 4.5 to 28 fluid ounces of ANCOCID 4070 per 1000 gallons of water in the system) weekly or as needed to maintain control. Badly fouled systems must be cleaned before treatment is begun.

#### AIR WASHER SYSTEMS

Add to the air washer sump or chill water sump, to ensure uniform mixing, 35 to 883 ppm ANCOCID 4070 (0.3 to 7.46 pounds or 4.5 to 113 fluid ounces of ANCOCID 4070 per 1000 gallons of water in the system) depending upon the severity of contamination to control bacteria, fungi and algae which cause fouling in industrial air washer systems.

#### INTERMITTENT OR SLUG METHOD

**INITIAL DOSE:** When the system is noticeably fouled, apply 148 to 883 ppm ANCOCID 4070 (1.26 to 7.46 pounds or 19 to 113 fluid ounces of ANCOCID 4070 per 1000 gallons of water in the system). Repeat until control is achieved.

**SUBSEQUENT DOSE:** When microbial control is evident, add 35 to 219 ppm ANCOCID 4070 (0.3 to 1.86 pounds or 4.5 to 28 fluid ounces of ANCOCID 4070 per 1000 gallons of water) weekly or as needed to maintain control.

#### CONTINUOUS FEED METHOD

**INITIAL DOSE:** When the system is just noticeably fouled, apply 148 to 883 ppm ANCOCID 4070 (1.26 to 7.46 pounds or 19 to 113 fluid ounces of ANCOCID 4070 per 1000 gallons of water in the system).

**SUBSEQUENT DOSE:** Maintain this treatment level by adding a continuous feed of 35 to 219 ppm ANCOCID 4070 (0.3 to 1.86 pounds or 4.5 to 28 fluid ounces of ANCOCID 4070 per 1000 gallons of makeup water).

Badly fouled systems must be cleaned before initial treatment.

**NOTE:** For use only in industrial air washing systems that maintain effective mist eliminating components.

#### STORAGE AND DISPOSAL

##### PROHIBITIONS:

This product is corrosive to mild steel. Do not store or transport in unlined metal containers. Do not contaminate food or feed storage, disposal or cleaning of equipment.

##### PESTICIDE DISPOSAL:

Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

##### CONTAINER DISPOSAL


**METAL CONTAINERS:** Triple rinse (or equivalent). Then offer for recycling or reconditioning or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.


**PLASTIC CONTAINERS:** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.

##### GENERAL

Consult federal, state or local disposal authorities for approved alternative procedures.

ANCO LABEL NO. 4070-TN  
DLR - 0597



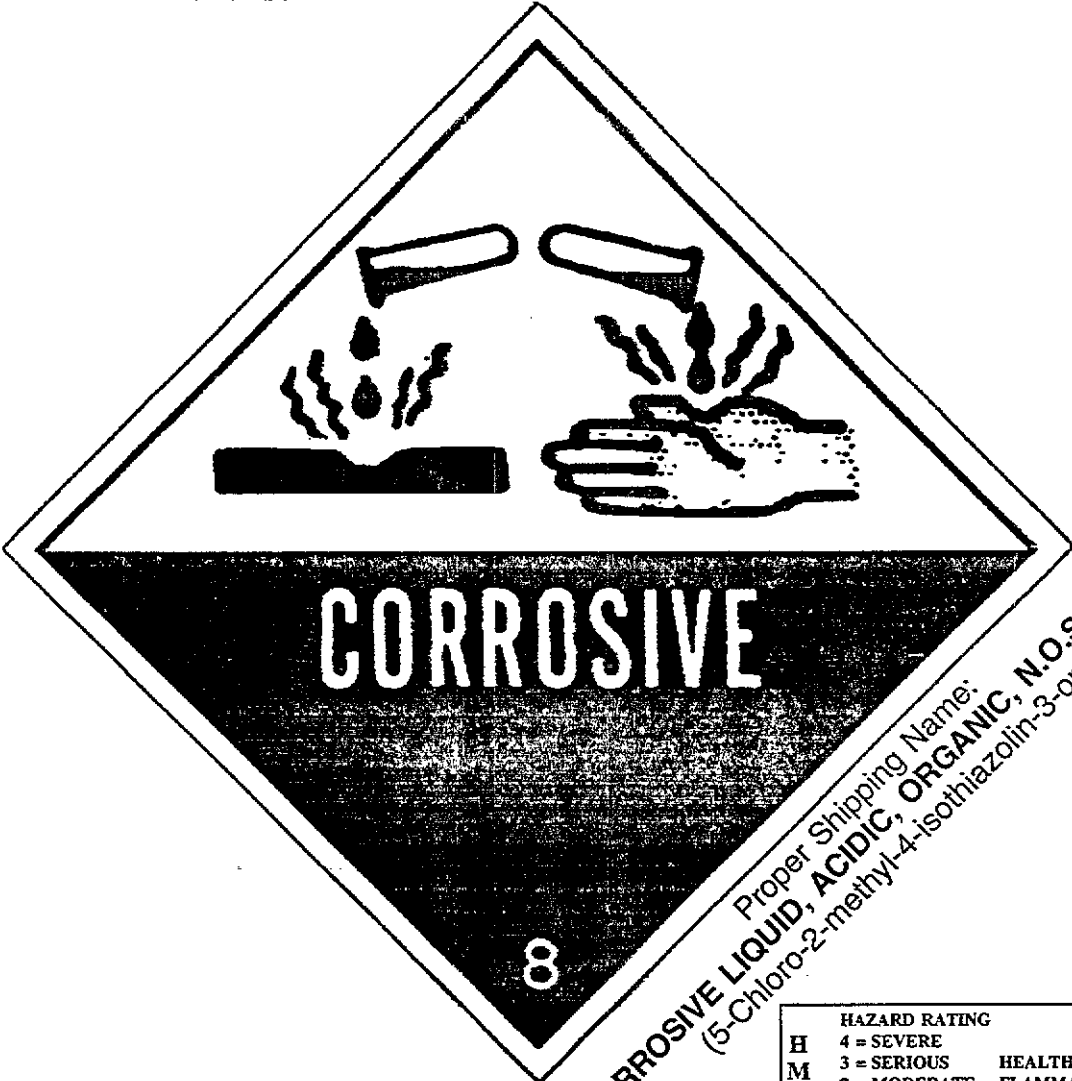

CORROSIVE LIQUID, ACIDIC, ORGANIC, N.O.S. UN3265  
 (5-Chloro-2-methyl-4-isothiazolin-3-one)  
 Proper Shipping Name:

HAZARD RATING		
H	4 = SEVERE	HEALTH 3
M	3 = SERIOUS	FLAMMABILITY 0
I	2 = MODERATE	REACTIVITY 0
S	1 = SLIGHT	PERSONAL PROTECTION D
	0 = MINIMAL	

In event of emergency,  
 CALL TOLL FREE: 800-424-9300 (CHEMTREC)

BIBB PRINTING CO. REORDER NO. 25221D

**ACCEPTED**  
 FEB 5 1998  
 Under the Federal Insecticide, Fungicide, and  
 Rodenticide Act as amended, for the  
 pesticide, registered under  
 EPA Reg. No. 3931-7