


pm 21

4091-1

102

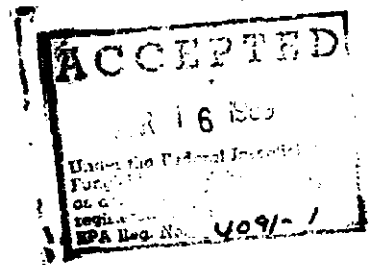

Coppo

Exterior Wood Preservative

GREEN COPPER NAPHTHENATE

For wood, rope, canvas, nets.
Protects against rot, mildew, and termites in above-ground use.
Paintable.

Neither the manufacturer nor the seller makes any representation or warranty, expressed or implied, concerning this product except that it is of the manufacturer's standard quality. Neither shall be held responsible in any manner for any personal injury, property damage or other type of loss resulting from the improper handling, storage and use of this product. The user accepts all use of this product on these conditions.

CO-33

DANGER: HARMFUL IF SWALLOWED. COMBUSTIBLE. KEEP OUT OF REACH OF CHILDREN. See back panel for additional cautions.

WEIGHT 6.645 LBS.
NET 1 GALLON

INGREDIENTS: ...

COMPANY K/S PRODUCT Coppo Ex. No. BM NO. 1

STYLE COAL COLORS BIK #341 - 465 DATE _____

BEST AVAILABLE COPY

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS
AND DOMESTIC ANIMALS**

WARNING! Contains Petroleum Distillate and Copper Naphthenate. Harmful or fatal if swallowed. Skin and eye irritant. Vapor harmful. Avoid breathing of vapors or spray mist. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Use only in a well ventilated area.

DO NOT USE this product in confined areas where vapors may accumulate and concentrate or where vapors may seep into structures that may be inhabited by human or animal life.

STATEMENT OF PRACTICAL TREATMENT: In case of skin contact, wash promptly and thoroughly with soap and water. If product gets in eyes, flush immediately with copious amounts of clean, cool water for 15 to 20 minutes. Get medical attention immediately. If product is swallowed, do not induce vomiting. Call the Poison Control Center, Hospital Emergency Room or Physician immediately.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish. Do not apply directly to water. Permits may be required for discharges containing this pesticide into lakes, streams, ponds, or public water. For guidance, contact the regional office of the Environmental Protection Agency.

PHYSICAL AND CHEMICAL HAZARDS: Do not use or store near heat or open flame.

COMBUSTIBLE. 6001888

KEEP OUT OF REACH OF CHILDREN

STORAGE: Keep container closed when not in use. Store in cool place. Leaking or damaged containers should be placed in a plastic bag and discarded in trash. All pesticides should be kept out of reach of children and stored away from food.
DISPOSAL: Do not reuse empty can. Wrap can and place in trash.

COPPO

An air-drying, ready-to-use, copper-based preservative for exterior wood fabric and rope. Protects against decay, rot, fungi, termites and other wood infesting insects. Coppo will give long-lasting protection to exterior structural lumber, posts, pilings, docks, piers, retaining walls, manila, sisal and jute rope, twine and netting, burlap and tarpaulins. It has excellent penetrative properties, a high resistance to leaching, low odor when dry and is light green in color.

Use Coppo on above grade exterior unfinished or bare wood. For below grade use Coppo Extra, a 2% solution of copper naphthenate for extra protection.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its label.

APPLICATION TO WOOD: Can be applied by dip, spray, brush or roller. For best results, wood should be dry and seasoned before application. Any paint, bark, coatings or rotten wood should be removed before treatment. Apply to the saturation point.

DIP APPLICATION: For best results, a minimum of a 3 minute dip is recommended. For wood that is to come in contact with ground or water, or if insect infestation is present, a 30-minute to overnight dip is recommended.

END GRAIN OR FRESH CUT: End and side grain of lumber should have additional coats or applications. Any surfaces cut after treatment should be retreated.

DRY TIME AND COVERAGE: Depends on type of wood and type of application, temperature and humidity. A minimum of 48 hours dry time is needed before applying a final finish. Paint or roll on coverage 100-200 sq. ft./gal.

FOR CANVAS & ROPE: When applying saturate thoroughly. Let dry before using.

SURFACES TO BE PAINTED LATER: If the treated surface is to be painted later, allow to dry 48 hours before painting. If white or light tints are used, there might be a slight discoloration after first coat of paint is applied. This will disappear completely when second coat is applied, if wood is thoroughly dry.

CLEAN-UP: Clean equipment promptly with paint thinner, mineral spirits or turpentine.

NOTE:
PLANT LIFE: Avoid contact with grass, trees or shrubs during application as damage can occur. Do not use this product in any confined area where the vapors may concentrate and cause injury to plant or animal life. After thoroughly dry, treated wood is non-injurious to surrounding plant life.

This product is not intended to treat wood used for food, feed, potable water, living plants, livestock and dairy animal contact surfaces. 6001-888

NON-PHOTOCHEMICALLY REACTIVE
MAX V.O.C. - 716 grams per liter
MAX Vapor Pressure - 2mm Hg at 20°C



Klean-Strip

Div. W. M. Barr, Inc. Memphis, TN 38101-1879 ©1987 W.M. Barr, Inc.

EPA Reg. No. 1001-17
EPA Est. No. 1001-TN-1

MADE IN
U.S.A.

APPROVED

BEST AVAILABLE COPY

1
EPI
3-88