


OPEN

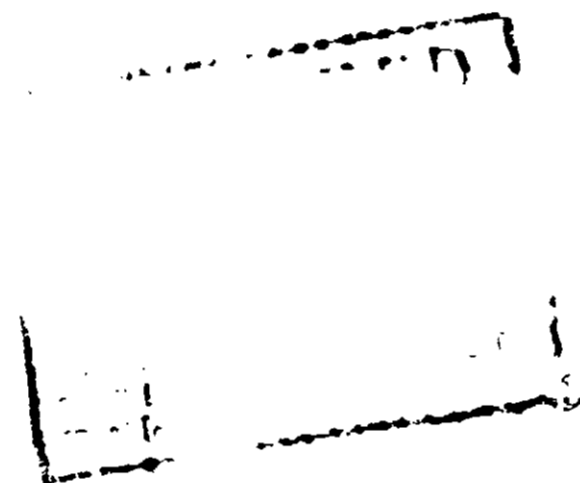

HARMFUL IF SWALLOWED. COMBUSTIBLE. KEEP OUT OF REACH OF CHILDREN. See back panel for additional cautions.

NET WEIGHT	74.84%
TOTAL ACTIVE INGREDIENTS:	
Dyphenyl Naphthalene	25.16%
(Copper as metal 2.01%)	
Total	100.00%


NET ONE GALLON

EPA Reg. No. 4001-6

Coppo-2

PRESERVATIVE

20% Solution of Copper Naphthenate
 2 COPPER AS METAL ~~Insures~~ Extra Protection

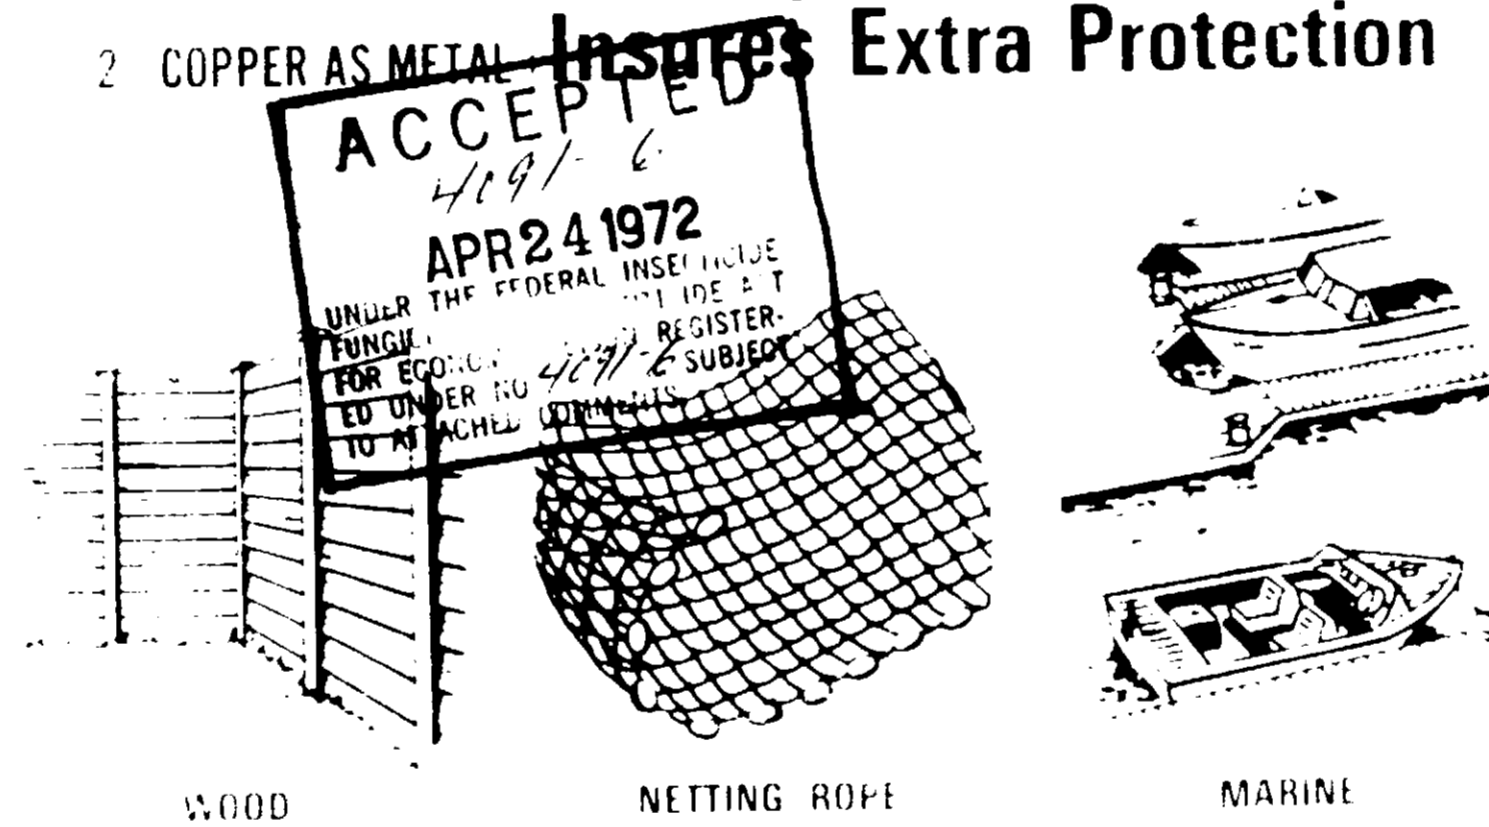

WOOD

NETTING ROPE

MARINE

Provides minimum standard for below ground wood installations

CAUTION: HARMFUL IF SWALLOWED. COMBUSTIBLE. KEEP OUT OF REACH OF CHILDREN. See back panel for additional cautions.

INERT INGREDIENTS	74.84%
TOTAL ACTIVE INGREDIENTS	
Copper Naphthenate	25.16%
(copper as metal 2.01%)	
Total	100.00%

NET ONE GALLON

EPA Reg. No. 4091-6

**CAUTION - COMBUSTIBLE MIXTURE - DO NOT USE,
POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME**

**WARNING! CONTAINS PETROLEUM DISTILLATE. HARMFUL OR
FATAL IF SWALLOWED. SKIN AND EYE IRRITANT. VAPOR HARM-
FUL. DO NOT BREATHE VAPOR OR SPRAY MIST.**

USE ONLY IN WELL VENTILATED AREA.

FIRST AID TREATMENT

**IF SWALLOWED DO NOT INDUCE VOMITING. CALL A PHYSICIAN
IMMEDIATELY.**

**IF SPLASHED INTO EYES—Immediately flush with water for at least 15
minutes. If irritation persists, get medical attention.**

**KEEP CONTAINER CLOSED WHEN NOT IN USE
KEEP OUT OF REACH OF CHILDREN**

ACCEPTED
G. W. King
4/11/54
19/12/54
4041-6
KING

USE: An air drying copper base preservative for wood, fabric and rope. Will arrest the
action of decay, rot, fungi, termites and other wood infesting insect. Can be applied by
dip, brush or spray and will give long lasting protection. It has excellent penetrative
properties, a high resistance to leaching (water insoluble), is long lasting and fully a
mild odor. The light green color is natural.

PREPARATION: For use as directed. For use on wood, fabric and rope, dilute with water
in the proportion of 1 part preservative to 10 parts water. For use on metal, dilute with
water in the proportion of 1 part preservative to 5 parts water. For use on concrete,
dilute with water in the proportion of 1 part preservative to 10 parts water.

APPLICATION: Apply liberally using an appropriate brush or spray. For use on wood,
brush or spray until the wood is thoroughly saturated. For use on fabric and rope,
soak in the solution for 24 hours.

FOR BRUSH OR SPRAY: Apply liberally using an appropriate brush or spray. For use on wood,
brush or spray until the wood is thoroughly saturated. For use on fabric and rope,
soak in the solution for 24 hours.

FOR DIP: Length of time for soaking dependent upon thickness and type of wood. A
minimum soaking time of 20 minutes suggested for the knees of 2" x 4" lumber and
soaking suggested in treating heavier timbers.

FOR CANVAS & ROPE: Apply in as to saturate thoroughly. Let dry for 24 hours.

SURFACES TO BE PAINTED: Apply this product to the surface. Allow treated surface to
dry 48 hours before painting. If white or light tints are used there might be a slight
discoloration after first coat of paint is applied. This will disappear and properly when
second coat is applied, if wood is thoroughly dry.

OVERAGE: Varies by species and condition of wood. For general use estimate 2 1/2 to
3 1/2 lbs. per gallon.

SALES: Sold in 5 gallon and 1 gallon containers. For sale in all states.

Klean-Strip



W. M. BARKER MFG. CO. 1954