



<p>US ENVIRONMENTAL PROTECTION AGENCY OFFICE OF PESTICIDES PROGRAMS REGISTRATION DIVISION (TS-767) WASHINGTON, DC 20460</p> <p>NOTICE OF PESTICIDE: <input checked="" type="checkbox"/> REGISTRATION <input type="checkbox"/> REREGISTRATION <i>(Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended)</i></p>	EPA REGISTRATION NO. 4091-10	DATE OF ISSUANCE NOV 26 1985
	TERM OF ISSUANCE	
	NAME OF PESTICIDE PRODUCT Seal Treat III	
NAME AND ADDRESS OF REGISTRANT (Include ZIP code)		
<div style="border: 1px solid black; padding: 5px;"> <p>W. M. Barr and Company P.O. Box 1879 Memphis, TN 38101</p> </div>	<div style="border: 1px solid black; padding: 5px;"> <p>161</p> <hr style="width: 50%; margin: 0 auto;"/> <p>18</p> </div>	<div style="border: 1px solid black; padding: 5px;"> <p>158726</p> <hr style="width: 50%; margin: 0 auto;"/> <p>1</p> </div>
<p>NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.</p>		
<p>On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.</p> <p>A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.</p> <p>Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.</p> <p>This product is conditionally registered in accordance with FIFPA sec. 3(c)(7)(A) provided that you:</p> <ol style="list-style-type: none"> 1. Submit and/or cite all data required for registration/reregistration of your product under FIFPA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data. 2. Make the labeling changes listed below before you release the product for shipment: <ol style="list-style-type: none"> a. Add the phrase "EPA Registration No. 4091-10." b. This product contains petroleum distillates. Therefore, the word CAUTION wherever it appears on the label, must be revised to read "WARNING." c. Delete the child warning hazard which appears at the bottom of the precautionary hazards section to humans and domestic animals. d. Delete "or wetlands" from the environmental hazards section. e. There should be a Statement of Practical Treatment in case of skin contact. 		
<p><input type="checkbox"/> ATTACHMENT IS APPLICABLE</p>		
SIGNATURE OF APPROVING OFFICIAL 	DATE 11/26/85	

3. Submit five (5) copies of your final printed labeling before you release the product for shipment. Refer to the A-7⁶ Enclosure for a further description of final printed labeling.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.


Henry M. Jacoby
Product Manager (21)
Fungicide-Herbicide Branch
Registration Division (TS-767)

Enclosure

ACCEPTED
with COMMENTS
in EPA Letter Dated

NOV 26 1985

Under the Federal Insecticide,
Fungicide, and Rodenticide Act
as amended, for the pesticide
registered under EPA Reg. No.


4091-10

Seal-Treat

WOOD PRESERVATIVE

WATER-REPELLENT

Neither the manufacturer nor the seller makes any representation or warranty, expressed or implied, concerning this product except that it is of the manufacturer's standard quality. Neither shall be held responsible in any manner for any personal injury, property damage or other type of loss resulting from the improper handling, storage and use of this product. The buyer accepts and uses this product on these conditions.



This product exceeds
NWMA and Fed. MIL Spec. TT-W-572
Water Repellency

PRODUCT NO.

CONTROLS ROT AND TERMITES • PA

INGREDIENTS

Active ingredient

Zinc Naphthenate 15-15%

(As Zinc Metal 2%)


Inert ingredients 84.25%

This product contains Petroleum Distillates

CAUTION
HARMFUL IF
COMBUSTIBLE

Read precautions
KEEP OUT OF REACH OF CHILDREN

NET 1 GALLON

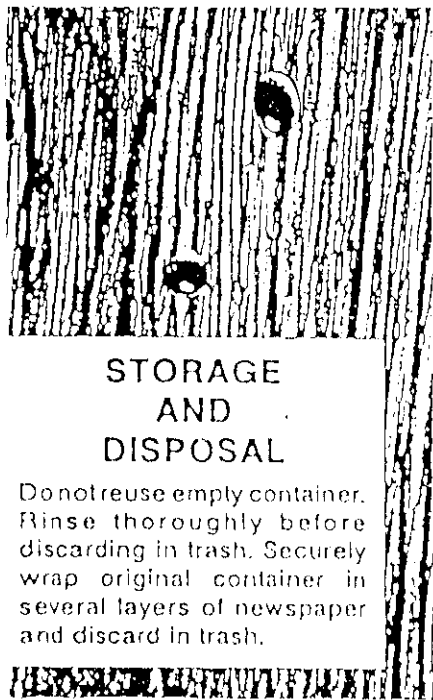

STORAGE AND DISPOSAL

Do not reuse empty container. Rinse thoroughly before discarding in trash. Securely wrap original container in several layers of newspaper and discard in trash.

SEAL-TREAT II

Seal-Treat II is a clear, water-repellent wood preservative for use on bare exterior wood before painting or for protection of unfinished wood while allowing it to weather naturally. Seal-Treat II contains a fungistat (zinc naphthenate) that penetrates deep into the wood fibers to guard against rot, decay and mildew. It also inhibits attack by termites. The special water repellants help seal out moisture to retard warping, swelling and shrinking of wood. Does not contain Pentachlorophenol.

Use above grade on unfinished wood and wood products... millwork, fences, siding, decks, shingles, outdoor furniture and structural lumber. For below grade, use Coppo II a 20% solution of copper naphthenate for lasting protection.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

CAUTION! Harmful if swallowed.

Avoid contact with skin, eyes, or clothing. Contains Petroleum Distillates and Zinc Naphthenate.

Do not take internally. Avoid breathing of vapors. Use only in a well ventilated area. Vapors may cause injury if adequate ventilation is not insured. Wash thoroughly with soap and water after handling. Close container after each use. Keep preservative and freshly treated wood away from flame, foodstuffs and plants. Do not use this product in any confined area where the vapors may concentrate and cause injury to plant or animal life.

FIRST AID - IF SWALLOWED, do not induce vomiting. Call your poison control center, hospital emergency room or physician immediately. **IF IN EYES,** flush with plenty of water. If irritation persists, get medical attention.

ENVIRONMENTAL HAZARDS - This product is toxic to fish. Do not apply directly to water or wetlands. Do not contaminate water by cleaning of equipment or disposal of wastes.

PHYSICAL AND CHEMICAL HAZARDS - Do not use or store near heat or open flame.

KEEP OUT OF REACH OF CHILDREN 9/84

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its label.

SURFACE PENETRATION: All cuttings should be completed before application. Wood must be clean, dry and free of bark and any previous finish. If mildew is present, scrub area with a solution of 1 part household bleach and 3 parts water, let stand 20-30 minutes and rinse with clear water. Then allow to dry thoroughly.

APPLICATION: Mix thoroughly before use. Do not thin. Apply by brushing or spraying of multiple coats. The most effective treatment is obtained by extended soaking where deep penetration and high absorption are obtained. A soaking period of 5 minutes per inch of thickness is recommended.

Use extra care to saturate joints and expose wood end grain for more effective protection.

PAINTING: Apply only one coat before painting. Allow to dry 24 hours or more before painting with oil-based paints, oil-based stain or oil-based primer for latex paints. Allow to weather 6-12 months if latex paint is to be applied directly over Seal-Treat II.

COVERAGE: Up to 250 sq. ft. per gallon average depending on condition and species of wood.

CLEAN-UP: Clean equipment promptly with paint thinner, mineral spirits or turpentine.

PLANT LIFE: When applying, avoid contact with grass, shrubs or trees. After thoroughly dry, treated wood is non-injurious to surrounding plant life.

NOTE: Treated wood will weather naturally and produce graying and contrasting tones depending upon its exposure. The results of weathering will vary with different exposures and different natural extractives in wood which can produce uneven tones.

Klean-Strip

DIV. OF W. M. BARR INC.

MEMPHIS, TN 38101

