



RELIANCE-BROOKS, Incorporated

CLEVELAND, OHIO

TORONTO, ONTARIO

DIRECTIONS FOR USE:

Initial Dosage: 190 ppm (.21 gallons or 1.7 lbs.) H-C Treatment No. 476 per 1000 gallons water in system (shock treatment). Repeat until control is achieved.

MAINTENANCE DOSE:

(1) Maintain a continuous feed (generally for open systems) of 0.06-0.12 gallons (0.45-0.90 pounds of H-C Treatment No. 476 to maintain 60-120 ppm per 1000 gallons of water lost by blowdown. (2) Intermittent or slug feed. Apply 0.06 gallons or 0.45 pounds of H-C Treatment No. 476 per 1000 gallons of water in the system every 3 or 4 days, or as needed to maintain control. Begin treatment when the system is in jeopardy of becoming affected or after cleaning systems whose efficiency is already impaired. For best results, clean heavily contaminated systems before treatment with No. 476. Add H-C Treatment No. 476 at the point of make-up to cooling tower.

(1) Environmental Precautions: "This product is toxic to fish. Do not discharge treated effluent where it will drain into lakes, streams or ponds. Do not contaminate water by cleaning of equipment, or disposal of wastes. Apply this product only as specified on this label."

(2) Container Disposal: "Do not reuse empty drums. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place."

H-C TREATMENT NO. 476

Concentrated slimicide for industrial and commercial refrigeration systems, gas plants, petrochemical plants cooling systems.

Helps keep water systems clear and free of visible algal, and fungal slimes. H-C Treatment No. 476 can be used as a supplemental Microbiocide with chlorine.

Active Ingredients:

N-Alkyl (C12 5%, C14 60%, C16 30%, C18 5%) dimethyl benzyl ammonium chloride 25%
Bis (tri-n-butyltin) oxide


Inert Ingredients

(including solubilizing and dispersing agents) 70

NET CONTENTS

EPA Est. No. 4297-OH-1

EPA Reg. No. 4297-27

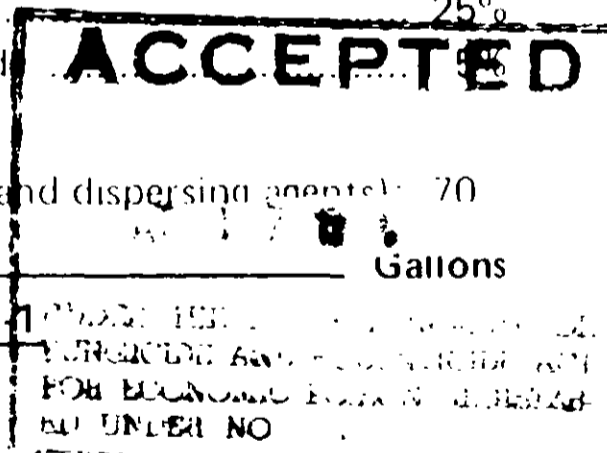

DANGER: Keep out of reach of children

See other danger on right side panel. When H-C Treatment No. 476 is used as directed, it will aid in controlling and/or preventing the development of algal and fungal slime, which are often the cause of reduced capacity or equipment shutdown.

H-C Treatment No. 476 is compatible with virtually all corrosion inhibitors. No. 476 at use dilution is non-corrosive to inanimate hard surfaces.

DANGER: Keep out of reach of children.

Corrosive, causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.

FIRST AID: In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call physician. Remove and wash contaminated clothing before reuse.

If swallowed, drink promptly large quantity of milk, egg whites, gelatin solution, or if these are not available drink large quantities of water. Avoid alcohol. Call a physician immediately.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression and convulsion may be needed.

FOR INDUSTRIAL USE ONLY



RELIANCE-BROOKS, Incorporated

CLEVELAND, OHIO

TORONTO, ONTARIO

INSTRUCTIONS FOR USE:

Initial Dosage: 190 ppm (.21 gallons or 1.7 lbs.) H-C Treatment No. 476 per 1000 gallons water in system (shock treatment). Repeat until control is achieved.

MAINTENANCE DOSE:

(1) Maintain a continuous feed (generally for open systems) of 0.06-0.12 gallons (0.45-0.90 pounds of H-C Treatment No. 476 to maintain 60-120 ppm per 1000 gallons of water lost by blowdown. (2) Intermittent or slug feed. Apply 0.06 gallons or 0.45 pounds of H-C Treatment No. 476 per 1000 gallons of water in the system every 3 or 4 days, or as needed to maintain control. Begin treatment when the system is in jeopardy of becoming affected or after cleaning systems whose efficiency is already impaired. For best results, clean heavily contaminated systems before treatment with No. 476. Add H-C Treatment No. 476 at the point of make-up to cooling tower.

(1) Environmental Precautions: "This product is toxic to fish. Do not discharge treated effluent where it will drain into lakes, streams or ponds. Do not contaminate water by cleaning of equipment, or disposal of wastes. Apply this product only as specified on this label."

(2) Container Disposal: "Do not reuse empty drums. Return to drum conditioner or destroy by perforating or crushing and burying in a safe place."

H-C TREATMENT NO. 476

Concentrated slimicide for industrial and commercial refrigeration systems, gas plants, petrochemical plants cooling systems.

Helps keep water systems clear and free of visible algal, and fungal slimes. H-C Treatment No. 476 can be used as a supplemental Microbiocide with chlorine.

Active Ingredients:

N-Alkyl (C₁₂ 5%, C₁₄ 60%, C₁₆ 30%, C₁₈ 5%) dimethyl benzyl ammonium chloride 25%
Bis (tri-n-butyltin) oxide 5%


Inert Ingredients

(including solubilizing and dispersing agents) 70%

NET CONTENTS

EPA Est. No. 4297-OH

EPA Reg. No. 4297-27

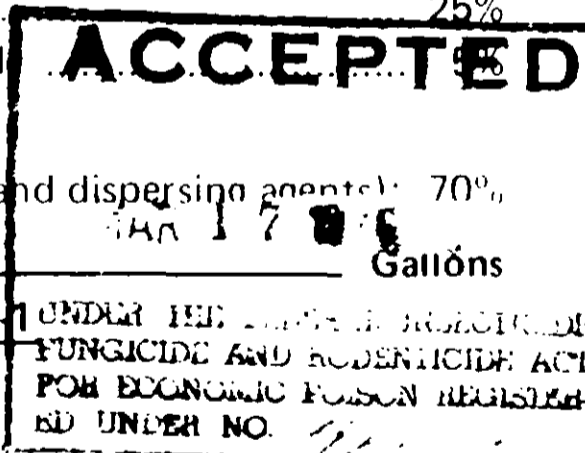

DANGER: Keep out of reach of children

See other danger on right side panel. When H-C Treatment No. 476 is used as directed, it will aid in controlling and/or preventing the development of algal and fungal slime, which are often the cause of reduced capacity or equipment shutdown.

H-C Treatment No. 476 is compatible with virtually all corrosion inhibitors. No. 476 at use dilution is non-corrosive to inanimate hard surfaces.

DANGER: Keep out of reach of children.

Corrosive, causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.

FIRST AID: In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse.

If swallowed, drink promptly large quantity of milk, egg whites, gelatin solution, or if these are not available drink large quantities of water. Avoid alcohol. Call a physician immediately.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression and convulsion may be needed.

FOR INDUSTRIAL USE ONLY