

TOLCIDE® PS200

INDUSTRIAL ANTIMICROBIAL

ACTIVE INGREDIENT:

Tetrakis(hydroxymethyl) phosphonium sulfate..... 20%

OTHER INGREDIENTS:..... 80%

TOTAL: 100%


EPA Reg. No. 4564-15

EPA Est. 550-TX-2

KEEP OUT OF REACH OF CHILDREN DANGER

FIRST AID	
If in eyes:	<ul style="list-style-type: none"> Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. Call a poison control center or doctor for treatment advice.
If swallowed:	<ul style="list-style-type: none"> Call a poison control center or doctor immediately for treatment advice. Have person sip a glass of water if able to swallow. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give anything by mouth to an unconscious person.
If inhaled:	<ul style="list-style-type: none"> Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth, if possible. Call a poison control center for further treatment advice.
If on skin or clothing:	<ul style="list-style-type: none"> Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.
Have the product container or label with you when calling a poison control center or doctor, or going for treatment.	
Note to physician: Probable mucosal damage may contraindicate the use of gastric lavage.	

In case of emergency call CHEMTREC at 1-800-424-9300.

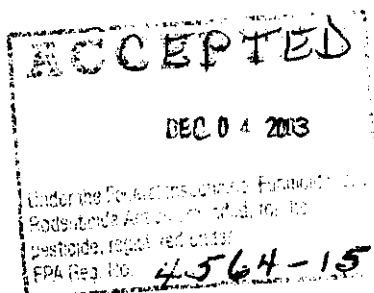

Manufactured for:

Rhodia

Rhodia Inc. • 259 Prospect Plains Road • Cranbury, NJ 08512-7500 • 903 360-4000

Product of the United Kingdom

[Bar and bullet format for FIRST AID section is optional.]

PRECAUTIONARY STATEMENTS
HAZARD TO HUMANS AND DOMESTIC ANIMALS

DANGER: Corrosive. Causes eye damage and skin irritation. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. Prolonged or frequent contact may cause allergic reactions in some individuals. Harmful if inhaled. Avoid breathing vapor. Harmful or fatal if swallowed. Avoid contamination of food. Remove contaminated clothing and wash before reuse.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

STORAGE: Store this product in a cool, dry area away from direct sunlight and heat to avoid deterioration. In case of a spill, flood the area with large quantities of water.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent) all containers and offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill or other procedures approved by state and local authorities.

Note: Seller makes no warranty, expressed or implied, concerning the use of this product other than indicated on the label. Buyer assumes all risk and/or handling of this material, when such use and/or handling is contrary to label directions.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

PAPER MANUFACTURING (for control of bacteria, fungi and algae)

a) For use as a slimicide in the manufacture of paper and paperboard products and adhesives that do not contact food.

Dosing: Additions should be made at a point in the system where mixing action is good, e.g. raw stock chest beater or mixing unit.

Add intermittently or continuously depending on mill conditions.

Intermittent Dosing: Add 122.5-1750 ppm of TOLCIDE® PS200 (24.5-350 ppm THPS) based on total water volume or an equivalent based on dry weight of paper produced.

Continuous Dosing: Add 70-245 ppm of TOLCIDE® PS200 (14-49 ppm THPS) based on total water volume or an equivalent based on dry weight of paper produced.

b) For use as a slimicide in the manufacture of paper and paperboard products that may contact food.

Dosing: Additions should be made at a point in the system where mixing action is good, e.g. raw stock chest beater or mixing unit.

Add intermittently or continuously depending on mill conditions.

Intermittent Dosing: Add 122.5-420 ppm of TOLCIDE® PS200 (24.5-84 ppm THPS) based on total water volume or an equivalent based on dry weight of paper produced. The maximum use concentration of THPS in the slurry cannot exceed 84 ppm.

Continuous Dosing: Add 70-245 ppm of TOLCIDE® PS200 (14-49 ppm THPS) based on total water volume or an equivalent based on dry weight of paper produced. The maximum use concentration of THPS in the slurry cannot exceed 84 ppm.

c) For use as a preservative for Alkyl Ketene Dimer (AKD) Emulsions.

This product can be used to prevent bacterial and fungal contamination of AKD emulsions that are applied to food-contact paper and paperboard at the dry end of the paper machine.

Dosing: Apply from 875-2485 ppm of TOLCIDE® PS200 (175-497 ppm THPS) to the AKD emulsion to be preserved.

DEC 04 2003

Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under
EPA Reg. No. 4564-15

INDUSTRIAL AND/OR COMMERCIAL RECIRCULATING COOLING WATER SYSTEMS (for control of bacteria, fungi and algae)

Initial Slug Dose: Add 350-1312.5 ppm of TOLCIDE® PS200 (70-262.5 ppm THPS) based on total water volume. Repeat until control is obtained. Thereafter, add either **Intermittently** 131.25-525 ppm of TOLCIDE® PS200 (26-105 ppm THPS) or **Continuously** 70-245 ppm of TOLCIDE® PS200 (14-49 ppm THPS) per day. Dirty systems must be cleaned prior to treatment.

HEAT TRANSFER SYSTEMS (Evaporative Condensers, Dairy Sweetwater Systems, Hydrostatic Sterilizers and Retorts, Brewery and Other Pasteurizers, and Warmers)

Add TOLCIDE® PS200 at the same application rates, and in the same manner as described above. It should be added to the system at a point of uniform mixing such as a basin area, sump area, or other reservoir or collecting area from which the treated water will be circulated uniformly throughout the system.

AIR WASHER SYSTEMS

For control of bacteria and fungi. Pre-clean the system with detergent and allow air washer to run with fan on for two hours. Flush and check nozzles, manually cleaning as necessary. Add 131.25-350 ppm of TOLCIDE® PS200 at a point where uniform mixing and even distribution will occur. Repeat as needed to maintain control.

SOLUTIONS / EMULSIONS

Not for use in manufacture of paper and paperboard products and adhesives that may come in contact with food. For the preservation of solutions, emulsions, adhesives and other aqueous liquid products, the addition of 0.0875% to 0.875% of TOLCIDE® PS200 (0.0175-0.175% THPS) is effective. Add at a point in the processing system where there will be sufficient time and agitation for good mixing and dispersion. The exact amount of TOLCIDE® PS200 to be added for the preservation of given formulations will depend on the components as well as local storage time and requirements.

OIL FIELD OPERATIONS

TOLCIDE® PS200 is effective in controlling sulfate reducing bacteria, general aerobic bacteria, including microorganisms that contribute to biofilm formation in oil field recovery, processing and distribution applications and supporting systems; such as injection water, water holding tanks, disposal well water, recirculating water handling systems, and pipelines. TOLCIDE® PS200 has been shown to dissolve iron sulfide and sequester iron when used under these conditions, leading to improved filter life and well injectivity, and reduction of hydrocarbon sheen. TOLCIDE® PS200 is also effective for use in controlling microbial growth in fluids used for drilling and stimulation of oil wells.

Water Floods

TOLCIDE® PS200 should be added to a water flood system at a point where uniform mixing will occur.

Initial Treatment: For a noticeably fouled system, add 350-1312.5 ppm TOLCIDE® PS200 (70-262.5 ppm THPS). When added to a flowing system, slug dose for 2-6 hours based on flow rates. Repeat as necessary until control is achieved.

Subsequent Treatment: Once control has been achieved, add 52.5-367.5 ppm TOLCIDE® PS200 (10.5-73.5 ppm THPS) weekly or as needed to maintain control. When added to a flowing system, slug dose for 2-6 hours based on flow rates.

Continuous Treatment: TOLCIDE® PS200 can be dosed continuously at a level of 52.5-250 ppm (10.5-50 ppm THPS).

Oil and Gas Pipelines

TOLCIDE® PS200 should be added at a point in the pipeline where uniform mixing will occur.

Slug Dosing: Follow instructions for water flood treatment.

Continuous Dosing: TOLCIDE® PS200 can be dosed continuously at a level of 52.5-376 ppm (10.5-75 ppm THPS).

Drilling Muds, Packer Fluids, Completion and Workover Fluids

TOLCIDE® PS200 should be added to these fluids at a point where uniform mixing will occur. Add 122.5-5250 ppm of TOLCIDE® PS200 (24.5-1050 ppm THPS) to a freshly prepared fluid depending on severity of contamination.

TOLCIDE® ® is a registered trademark of Rhodia Consumer Specialties Limited.

NET CONTENTS: As Marked on Container

34D-0503