

PM 31 4643-10 12 11 90

# DEARCIDE® 706

Bacteriostat and algacide for the control of the growth of microorganisms (bacteria and algae) in industrial and commercial recirculating water cooling towers and of bacterial slimes in brewery pasteurizers and beverage can warmers and coolers.

Active Ingredients  
 1-Alkyl\* amino-3-aminopropane ..... 15.0%  
 \*alkyl as in fatty acids of coconut oil

Inert Ingredients ..... 85.0%

EPA Reg No 4643-10  
 EPA Est No 4643 R-1

permi For guidance contact your regional office of the EPA Do not contaminate water by cleaning of equipment or disposal of waste Apply this product only as specified on this label

### STORAGE AND DISPOSAL

**KEEP FROM FREEZING**  
 Do not contaminate water, food or feed by storage or disposal

**Pesticide Disposal:** Pesticide wastes are acutely hazardous Improper disposal of excess pesticide, spray mixture, or residue is a violation of Federal law If these wastes cannot be disposed of by use according to label instructions, contact your state pesticide or environmental control agency or the hazardous waste representative at the nearest EPA regional office for guidance.

**Container Disposal:** METAL CONTAINERS: Triple rinse (or equivalent) Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities PLASTIC CONTAINERS: Triple rinse (or equivalent) Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or incineration, or, if allowed by state and local authorities, by burning If burned, stay out of smoke

### DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH THE LABELING

**AGITATE BEFORE USING**

**Cooling Tower Systems:** Initial dose: When microbiological slimes are evident, apply 9.9 to 12.4 fl ozs of DEARCIDE 706 per 1000 gals (80 ppm to 100 ppm) of water in the system Repeat until control is achieved Bodily fouled systems should be cleaned before treatment is begun

**Subsequent dose:** When microbiological control is evident, apply 2 to 9.9 fl ozs of DEARCIDE 706 per 1000 gals (50 ppm to 80 ppm) of water in the system once per week or as needed to maintain control

Feeding DEARCIDE 706 should be fed at full strength in the cooling tower basin at a point of maximum water circulation Tower bleedoff valves should be closed to permit a retention time of 4 hours In the event that foaming should occur during the treatment of the cooling water system with DEARCIDE 706, apply 5.0 fl ozs of EXFOAM 440 per 1000 gals of water (40 ppm) in the system See Product Bulletin 52 706

**Brewery Pasteurizers:** Apply DEARCIDE 706 to fresh water after pasteurizer has been cleaned and boiled out Apply a minimum of 55 fl ozs (approx 1/2 gal) DEARCIDE 706 per 1000 gals of water capacity (1 2327) on a daily basis Slug feed DEARCIDE 706 at the recommended use dilution to the preheating and cooling sections of the pasteurizer immediately following the daily production run Circulate for 10-15 minutes to insure thorough mixing

**Can Warmers And Coolers:** DEARCIDE 706 can be used for sealed beverage cans and sealed jars of food Good manufacturing practice requires all leakers be removed Clean and boil out warmer or cooler units and fill with fresh water Slug feed a minimum of 55 fl ozs (approx 1/2 gal) DEARCIDE 706 per 1000 gals of water capacity (1 2327) on a daily basis immediately following the daily production run Circulate for 10-15 minutes to insure thorough mixing

**NOTICE:** Seller warrants that this product conforms to its chemical description on the label and is reasonably fit for the purposes stated on the label when used in accordance with the label directions under normal conditions This warranty does not extend to, and Buyer assumes all risk for, any and all loss or damage resulting from the use of this product in any manner contrary to label directions or warnings

THE FOREGOING LIMITED WARRANTY IS EXCLUSIVE AND IS GIVEN AND ACCEPTED IN LIEU OF ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTY OF MERCHANTABILITY AND THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE SELLER'S LIABILITY SHALL BE LIMITED TO THE PURCHASE PRICE OF THE PRODUCT THE REMEDIES OF BUYER FOR ANY BREACH OF WARRANTY SHALL BE LIMITED, IN SELLER'S DISCRETION, TO REPLACEMENT OF NONCONFORMING PRODUCT OR REFUND OF PURCHASE PRICE IN NO EVENT SHALL SELLER BE LIABLE FOR SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES

Net Weight: 30 gal drum - 242 lbs  
55 gal drum - 443 lbs  
Bulk

## DANGER

KEEP OUT OF REACH OF CHILDREN

**Precautionary Statements:** HAZARDOUS TO HUMANS AND DOMESTIC ANIMALS Causes eye damage and skin irritation Do not get in eyes, on skin or clothing Wear goggles or face shield and rubber gloves when handling Harmful or fatal if swallowed Avoid contamination of food Water treated with DEARCIDE® 706 should not be used for food processing, irrigation or in the manufacture of paper used for food packaging

**Statement of Practical Treatment - First Aid:** IF SWALLOWED, drink promptly large quantities of water Avoid alcohol Call a physician immediately IF INHALED, remove immediately to fresh air If not breathing, apply artificial respiration If breathing is difficult, give oxygen and call a physician IF ON SKIN, wash thoroughly with soap and water Remove and wash contaminated clothing before reuse IF IN EYES, flush with plenty of water for at least 15 minutes Call a physician NOTE TO PHYSICIAN Probable mucosal damage may - - - - - indicate the use of gastric lavage Measures against circulatory shock, respiratory depression and convulsions may be needed


### ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish and wildlife Do not discharge treated effluent into lakes, streams, ponds, or public waters unless in accordance with a NPDES

# GRACE Dearborn

Dearborn Division W. R. Grace & Co. - Conn., 300 Genesee Street, Lake Zurich, IL 60047 (708) 438-1800

# REDUCED 26%

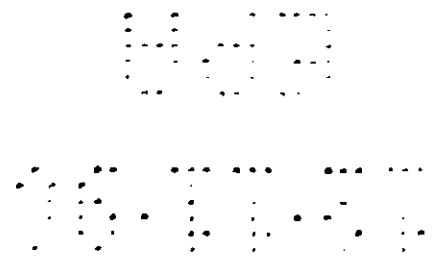

DEARCIDE 706  
EPA Reg No 4643-10  
EPA Est No 4643 R-1