

Restricted Use Pesticide

For sale to and use only by certified applicators or by persons under their direct supervision and only for those uses covered by the certified applicator's certification.

1064
10071
4664-6

The U.S. EPA has determined that pentachlorophenol can produce defects in the offspring of laboratory animals. Exposure to pentachlorophenol during pregnancy should be avoided.

McCloskey
Rott-Fyter
Clear Wood
Preservative
Paintable, Water Repellent, Protects Against Decay and Fungi.

Keep Out of Reach of Children

(12 pt)

DANGER

(18 pt)

Statement of Practical Treatment


For Eyes: In case of contact with eyes, flush plenty of water for at least 15 minutes. Call physician.

For Skin: Wash exposed areas of skin with soap and water after handling or using.

If Swallowed: Do not induce vomiting. Call a physician immediately.

Note: Remove and wash contaminated clothing before reuse or discard in accordance with instructions for pesticide container disposal.

See Side Panel for Additional Precautionary Statements

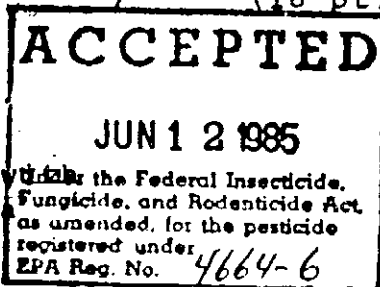

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND
DOMESTIC ANIMALS

DANGER

(18 pt)

Corrosive. Causes eye damage and skin irritation. Do not get in eyes, on skin or on clothing. Harmful or fatal if swallowed.

Applicators must wear gloves impervious to this wood treatment formulation in all situations where dermal contact is expected. (For example, during the actual application process and when handling freshly treated wood)

Spray applicators must wear protective clothing (including overalls, jackets, gloves and boots) impervious to this wood treatment formulation, and a respirator, head covering and goggles when spraying.

Applicators who apply pentachlorophenol by other application methods (e.g., brush-on) must wear disposable coveralls or other suitable impermeable protective clothing. Launder non-disposable protective clothing separately from other clothing.

Applicators must not eat, drink, or use tobacco products during those parts of the application process that may expose them to this wood treatment formulation.

Avoid inhaling vapors. If inhalation of vapors cannot be avoided, applicators must wear a properly fitting, well-maintained half-mask canister or cartridge respirator which is MSHA/NIOSH approved for organic vapors and acid gases.

Wash thoroughly after skin contact, and before eating, drinking, use of tobacco products, or using restrooms.

ENVIRONMENTAL HAZARDS

This product is toxic to fish and wildlife. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not use this product to treat wood intended to be used where it may come into direct or indirect contact with public drinking water, or drinking water for domestic animals or livestock, except for those uses involving incidental contact such as docks and bridges.

PHYSICAL AND CHEMICAL HAZARDS

Contains petroleum distillate. Do not use, pour, spill or store near heat and open flame.

Notes on Handling: Because this product contains petroleum distillate, proper precaution should be taken to insure adequate ventilation. It should not be applied in the presence of open flames. Smoking during application should not be permitted in the area.

2380

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

STORAGE AND DISPOSAL

(14 pt)

Securely wrap original pesticide container in several layers of newspaper and discard in trash. Do not reuse empty containers. Protective clothing must be changed when it shows signs of contamination. Dispose of worn-out protective clothing and workshoes in any general landfill, in the trash, or in any other manner approved for pesticide disposal.

Wood which has been treated with this product should be disposed of by burial or ordinary trash collection. Do not burn treated wood in an outdoor fire or in stoves or fireplaces because toxic chemicals may be produced as part of the smoke and ashes.

Do not apply where there may be direct contact with domestic animals or livestock, and where there may be contamination of food, feed, or drinking and irrigation water.

Do not apply in interiors. Do not apply to wood intended for use in interiors except for those support structures which are in contact with soil in barns, stables, and similar sites and which are subject to decay or insect infestation, and millwork which has outdoor surfaces (e.g., door frames, windows and patio frames). Interior surfaces of the treated wood should be sealed with two coats of an appropriate sealer.

Do not use this product to treat wood intended to be used for cutting boards or counter-tops.

Do not use this product to treat wood intended for construction of those portions of beehives which may come into contact with the honey.

Wood to be treated with this product should be cut to size before treatment. If it is necessary to saw or machine wood after treatment, wear goggles to protect the eyes from flying particles and a dust mask to avoid inhaling sawdust from the treated wood. If oily preservatives or sawdust accumulate on clothes, launder before reuse. Wash work clothing separately from other household laundry. Contact with treated surfaces should be avoided even after the preservative has dried.

This product should not be used to treat wood which will be in frequent or prolonged contact with skin, unless the wood will be treated with an effective sealer.

Note to User: As used on this label, the term "respiratory" means properly fitting, well-maintained half-mask canisters or cartridge respirators which are MSHA/NIOSH-approved for organic vapors and acid gases. Examples of acceptable materials for protective clothing (e.g. overalls, jackets, head covering, boots, disposable coveralls, and gloves) required during application and handling of pentachlorophenol are polyvinylacetate (PVA), polyvinylchloride (PVC), neoprene, NBR (Buna-N), and nitrile. Urethane, shellac, latex, epoxy enamel and varnish are acceptable sealers for pentachlorophenol-treated wood.

ROTT-FYTER is a penetrating wood preservative. It is water repellent, and is an excellent base for paints, varnish, enamel, both high hiding and semi-transparent stains and increases resistance to blistering and peeling. It is effective against termites, dry-rot, and stain caused by fungi and molds.

Keep solution and freshly treated wood away from plastics, asphalt shingles and tiles. DO NOT USE ON WOOD WHICH WILL COME IN CONTACT WITH FOOD OR LIVING PLANTS. DO NOT USE ON INTERIOR WOOD OR WOOD WHICH WILL COME IN CONTACT WITH THE SKIN UNLESS THE WOOD IS SEALED WITH PAINT, VARNISH OR SHELLAC AFTER TREATMENT.

PREPARATION

All cutting, gluing, sanding and drilling should be done before applying ROTT-FYTER. Wood must be clean and dry. Do not use over previously finished or stained wood without stripping off the old finish.

APPLICATION

1. Treating may be done with brush or roller, or immersion.
2. Liberally apply ROTT-FYTER until puddles remain on surface.
3. Coat side and end grains with three or more consecutive coats to give full protection.
4. A minimum of two coats must be given to any wood that comes in contact with the soil to protect against wood destroying and staining fungi and dimensional change. Apply second coat before first coat is dry.
5. Any surface cut after first treatment should be re-treated.

SPREADING RATE

100-200 square feet of surface, depending on porosity of wood. By immersion, one gallon of ROTT-FYTER will treat about 10 to 15 cubic feet of wood, depending on porosity.

DRYING TIME

Allow 24 to 48 hours of air drying time before applying finish. Before glazing, painting, or varnishing, the treatment should be completely dry and odor free.


THINNING

No thinning is required.

CLEANUP

Use mineral spirits to remove wet ROTT-FYTER from all surfaces, brushes and rollers. Lacquer thinner may be used to remove dried product from glass and other surfaces. Wash contaminated clothing before re-use.

IMPORTANT NOTICE TO PURCHASER—ROTT-FYTER must be used in accordance with directions on this label to get satisfactory results, no warranty, expressed or implied is made. Buyers assume all risks when using the product contrary to directions on the label.

 **McCloskey, VARNISH CO.**
Philadelphia 19136 — Los Angeles 90040
MADE IN U.S.A. B2

OUTSTANDING FEATURES

Water repellent Reduces swelling, shrinking and warping
Protects against decay and fungi stain
Ready to use
Adds years of life to wood
Odorless when dry
Resists termites
Paintable
Rott Fyter may be tinted with universal tinting colors