

# LIQUID CHLORINE

Active Ingredient Chlorine, 99.7

Inert Ingredients 0.3

NET WEIGHT 2000 LBS

AC Reg. No. 4746-46

AC Reg. No. 4746-46



**DANGER POISON!**



**HAZARDOUS LIQUID and GAS UNDER PRESSURE**


- KEEP OUT OF THE REACH OF CHILDREN • DO NOT BREATHE VAPORS
- DO NOT HEAT CYLINDERS • DO NOT GET IN EYES OR ON SKIN
- HAVE AVAILABLE SUITABLE GAS MASKS FOR CHLORINE SERVICE.
- IN CASE OF EXPOSURE, MOVE PATIENT TO FRESH AIR. KEEP WARM AND QUIET; CALL PHYSICIAN.

Sold by

**MICAL INDUSTRIES, INC.**

Box 991, Borger, Texas 79007

AC 806/273 6424

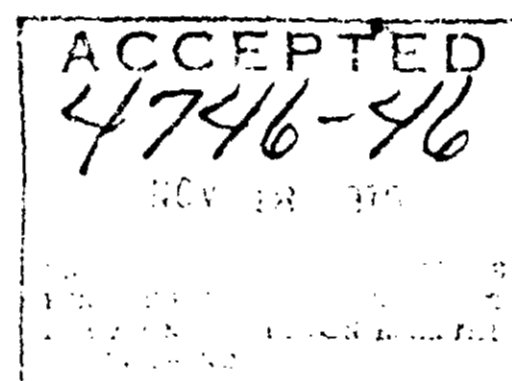

# LIQUID CHLORINE

- Before using ton containers, position cylinder so that the two outlet valves are directly above and below each other.
- Top valve delivers vapor, bottom valve delivers liquid on ton containers.
- Valve outlets on cylinders are designed for compression type fitting. *Do not* use tapered thread fittings (standard pipe fittings). Use only approved adapters.
- Operate cylinder valves only with wrench designed for this type valve. Use of oversize wrench may result in excessive tightening resulting in damage to valve stem and seat, causing leak to develop.
- After repeated valve operations, the packing may loosen slightly, resulting in small chlorine leak around valve stem. In such case, tighten packing nut slightly to stop leak. *Do not over-tighten.*
- Upon emptying container, close both valves securely, replace outlet caps and valve protection bonnet, designate container as empty.
- In case of container defect or leak that cannot be stopped, promptly contact

Sold by

**CHEMICAL INDUSTRIES, INC.**

Box 991, Borger, Texas 79007

AC 806/273 6424

