

# Atthey's

ACCEPTED  
2-24-72  
4794-4  
UNDER THE PROVISIONS OF THE  
FURFURAL ACT OF 1960  
FOR THE PROTECTION OF THE  
ED. UNDER THE PROVISIONS OF  
20. AS APPLIED TO THE



USDA REG.  
NO. 4794-4

ACTIVE INGREDIENT: CUPROUS OXIDE: 21.06%

INERT INGREDIENTS: 78.94%

**CP-1 ANTI-FOULING  
COPPER BOTTOM PAINT RED**

# MARINE FINISH

ONE GALLON

# Atthey's

# Atthey's

**WARNING! FLAMMABLE!**  
 Keep away from heat, sparks and open flame. **KEEP OUT OF REACH OF CHILDREN.** Avoid breathing vapor or spray mist and prolonged contact with skin. Keep container closed when not in use. **HARMFUL IF EATEN.**  
**USE WITH ADEQUATE VENTILATION**

**USDA REG.  
 NO. 4794-4**

**ATHEY COPPER PAINTS** Provide an anti-fouling finish that protects and preserves boat bottoms in both salt and fresh water. Recommended for use on all types of bottoms: wood, metal and fibre glass. Keeps the bottom clean thus providing efficient operation and minimum maintenance.

**APPLICATION:** Surface must be dry, clean, free of dirt, grease or grime. Fill all holes and cracks. Remove all loose, peeling or blistering paint from previously painted surfaces. Prime **METAL SURFACES** with metal primer. Apply two coats of **ATHEY COPPER PAINT** allowing overnight drying between coats. May be launched after six hours drying of finish coat. Stir paint thoroughly and keep stirred during application. Covers 400-500 square feet per gallon.

**THINNING & CLEANUP:** Apply as supplied. May be thinned sparingly with mineral spirits, turpentine, or paint thinner. Brushes and equipment may be cleaned with paint thinner or turpentine.

**INERT INGREDIENTS: 78.94%**

**ING  
 AINT RED**

**FINISH**


**ANALYSIS BY A.E.G.H.**

<b>PIGMENT—52.0%</b>		<b>VEHICLE—48.0%</b>	
Cuprous Oxide .....	40.5%	Pine Tar .....	24.8%
Iron Oxide .....	11.5%	Resin Salts .....	24.4%
Silicates .....	19.5%	Petroleum Thinners .....	49.4%

Manufactured by  
**THE C. M. ATHEY PAINT CO.**  
 BALTIMORE, MD. 21230

# y's

# Athey's

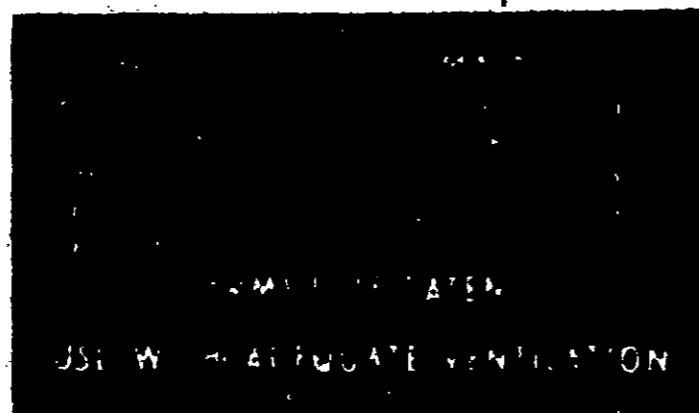

USDA REG.  
NO. 4794-4

**ATHEY COPPER PAINTS** Provide an anti-fouling finish that protects and preserves boat bottoms in both salt and fresh water. Recommended for use on all types of bottoms: wood, metal and fibre glass. Keeps the bottom clean thus providing efficient operation and minimum maintenance.

**APPLICATIONS:** Surface must be dry, clean, free of dirt, grease or grime. Fill all holes and cracks. Remove all loose, peeling or blistering paint from previously painted surfaces. Prime **METAL SURFACES** with metal primer. Apply two coats of **ATHEY COPPER PAINT** allowing overnight drying between coats. May be launched after six hours drying of finish coat. Stir paint thoroughly and keep stirred during application. Covers 400-500 square feet per gallon.

**THINNING & CLEANUP:** Apply as supplied. May be thinned sparingly with mineral spirits, turpentine, or paint thinner. Brushes and equipment may be cleaned with paint thinner or turpentine.

INERT INGREDIENTS: 78.94%

ING  
PAINT RED

# NISH

ANALYSIS BY WEIGHT

Pigment—8.9%		Vehicle—48.9%	
Carbon Black	8.9%	Lead	24.9%
Iron Oxide	0.0%	Iron Oxide	21.7%
Silicates	0.0%	Petroleum Thinner	47.0%

Manufactured by  
**THE C. M. ATHEY PAINT CO.**  
BALTIMORE, MD. 21230