


USDA Reg. No. 4861-1

ONE GALLON

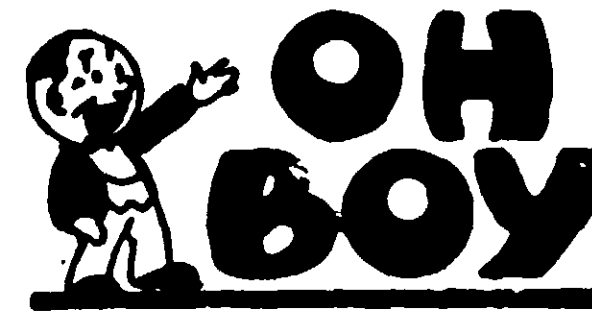

TRADE MARK

## COPPER NAPHTHENATE WOOD PRESERVATIVE

### ACTIVE INGREDIENTS 100%

*Copper Naphthenate	20%
Petroleum Distillate	80%
Total	100%
*Equivalent to Metallic Copper	2%

### CAUTION

Injurious If Taken Internally. Do Not Spray Near or Toward  
An Open Fire.

### DIRECTIONS

Use material as it comes from can. Do not thin for dipping or spraying. Sleepers, joists, jams, window frames, other mill work and timbers should be free from any bark, dry and well seasoned before making application by brush, dip or spray methods and should be treated before installation for best results. At least two flowing coats should be used on timber which is to come in contact with the ground or masonry.

For termites and powder post beetle protection timbers should be treated before being put into use.

**FOR BRUSH:** apply liberally using as many coats as necessary to secure penetration desired. Protection is dependent on good penetration. At least two flowing coats should be used on timber which is to come in contact with the ground or masonry.

**FOR DIP:** the thicker the timber the longer it should be in contact with the preservative. A minimum of 30 minutes soaking for 1 inch timber up to overnight for very heavy material.

**FOR SPRAY:** same as brush.

Wood to be painted later. Let the preservative dry for at least 48 hours before applying first coat of paint.

**Clarke and Proctor Turpentine Co.**

Fayetteville, N. C.

Phone 483-7469

P. O. Box 194

**CAUTION: Keep out of reach of Children**

**ACCEPTED**

*Nov 28, 1966*

UNDER THE FEDERAL INSECTICIDE  
FUNGICIDE AND RODENTICIDE ACT  
ECONOMIC POISON REGISTERED  
EPA REG. NO. 4861-1