

SUBTERRANEAN TERMITES-Directions For Professional Use
 Use Dieldrin Termite Control in a 0.3% water emulsion. Mix 1 gallon of Dieldrin Termite Control with 60 gallons of water.

PRECONSTRUCTION TREATMENT

Slab-on-ground Construction

- (1) Apply an over-all treatment under entire surface of floor slab. Apply at the rate of 1 gallon per 10 square feet, except that if fill under slab is gravel or other coarse absorbent material, apply at the rate of 1 1/2 gallons per 10 square feet. If soil is treated and the concrete slab is not poured shortly thereafter on the same day, a polyethylene sheeting or other waterproof material shall be placed over the treated soil.
- (2) Under slab-on-ground porch floors and entrance platforms, apply an over-all treatment at the rate of 1 gallon per 10 square feet.
- (3) Along both sides of foundation wall, along interior foundation walls, and around plumbing dig a narrow trench with a band no wider than six inches and to a depth of 1 foot, but not below the top of the footing. Apply at the rate of 2 gallon per 5 linear feet of trench. The chemical should be mixed with the soil as it is being replaced in the trench.
- (4) Treat all voids in hollow masonry units of the foundation at the rate of at least 1 gallon per 5 linear feet of wall. Apply the emulsion so as to reach the footing.

Buildings With Crawl Spaces

- (1) Dig a narrow trench with a band no wider than six inches to the top of the footing along the inside of foundation walls, around piers, sewer pipes and conduits. Apply 2 gallons of emulsion per 5 linear feet of trench. The chemical should be mixed with the soil as it is being replaced in the trench. Cover with a layer of soil.
- (2) Dig a narrow trench with a band no wider than six inches to the top of the footing along the outside of the foundation wall. Apply 2 gallons of emulsion per 5 linear feet of trench per each foot of depth. A trench 3 feet deep would require 6 gallons per 5 linear feet. The chemical should be mixed with the soil as it is being replaced in the trench and cover with a layer of soil.
- (3) Under attached porches, entrance platforms utility entrances, and similar situations where slab or fill is at the same grade level apply 1 gallon per 10 square feet of soil surface.
- (4) Treat all voids in hollow masonry units of the foundations at the rate of at least 1 gallon per 5 linear feet of wall. Apply the emulsion so as to reach the footing.

Buildings With Basements

- (1) Apply an over-all treatment under the basement floorings, as well as under attached porches, entrance platforms, utility entrances, and similar situations where slab fill is at the grade level. Apply at the rate of 1 gallon per 10 square feet, except that if fill under slab is of washed gravel, cinders, or similar coarse material, increase the dosage by at least one-half. Where crawl spaces exist, treat as described in part (2) below.
- (2) Dig a narrow trench with a band no wider than six inches to the top of the footing along the inside of foundation walls, around piers, sewer pipes and conduits. Apply 2 gallons of emulsion per 5 linear feet of trench. The chemical should be mixed with the soil as it is being replaced in the trench and then cover with a layer of soil.
- (3) Along the outside of foundation walls, dig a narrow trench with a band no wider than six inches, such trench to be dug no deeper than the top of the footings. If the trench is less than 15 inches in depth to the top of the footings, apply 1 gallon per 5 linear feet. Replace the soil and apply another 1 gallon per 5 linear feet to the back fill. If the trench is more than 15 inches in depth to the top of the footings, apply 2 gallons per 5 linear feet. Replace the soil and apply another 2 gallons per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. A trench 30 inches deep is a maximum depth required alongside foundations where the top of the footings is greater than 30 inches deep. In lieu of trenching to a 30" depth, make the trench 12 to 15" deep and rod to footing, spacing the holes about 1 foot apart.
- (4) Treat all voids in hollow masonry units of the foundation at the rate of 1 gallon per 5 linear feet of wall. Apply the emulsion so as to reach the footing.


NET CONTENT 1 GALLON

E.P.A. NO. 4876-6



DIELDRIN

TERMITE CONTROL

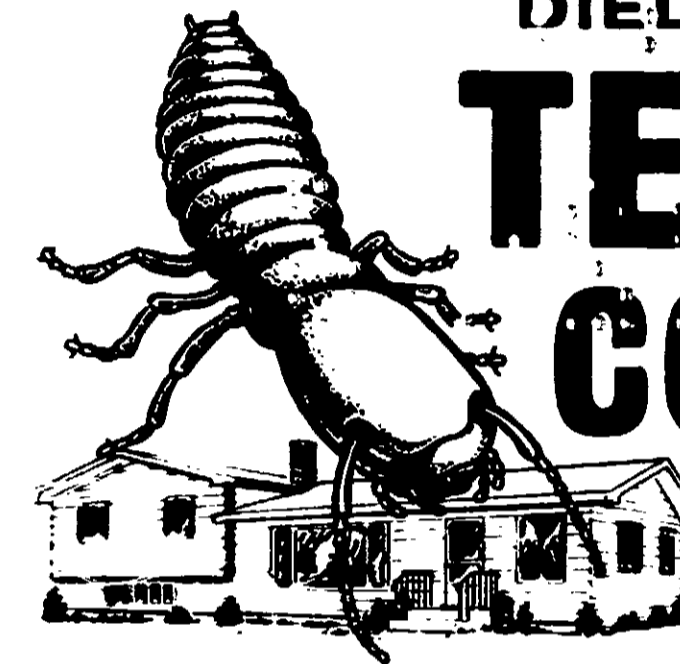

KILLS TERMITES

PROTECTS AGAINST FURTHER INVASION FOR YEARS

WARNING: Keep Out Of Reach Of Children See Side Panel For Additional Cautions

ACTIVE INGREDIENTS	
*DIELDRIN	18.6 %
PETROLEUM HYDROCARBONS	78.4 %
INERT INGREDIENTS	3.0 %
TOTAL	100.0 %
* 15.8% Hexachlorocyclohexane-endo exo-dimethanonaphthalene and 2.8% related compounds.	

Packaged By
"AG" SUPPLY COMPANY
 HOPKINSVILLE, KY. 42240

ACCEPTED
 UNDER THE FEDERAL INSECTICIDE
 AND RODENTICIDE ACT
 ECONOMIC POISON REGISTERED
 UNDER NO. 4876-6

NET CONTENT 1 GALLON

E.P.A. NO. 4876-6



DIELDRIN

TERMITE CONTROL



KILLS TERMITES

PROTECTS AGAINST FURTHER INVASION FOR YEARS

WARNING: Keep Out Of Reach Of Children
See Side Panel For Additional Cautions

ACTIVE INGREDIENTS	
*DIELDRIN	18.6 %
PETROLEUM HYDROCARBONS	78.4 %
INERT INGREDIENTS	
TOTAL	100.0 %

* 15.8% Hexachlorocyclohexane-endo, exo-dimethanonaphthalene and 2.8% related compounds.

Packaged By
"AG" SUPPLY COMPANY
HOPKINSVILLE, KY. 42240

ACCEPTED

NOV 3 1976

UNDER THE FEDERAL INSECTICIDE
FUNGICIDE AND RODENTICIDE ACT
ECONOMIC POISON REGISTER
E.P.A. UNDER NO. 4876-6

on of Dieldrin Termite Control with 60 gallons of water.

slab. Apply at the rate of 1 gallon per 10 square feet,
material, apply at the rate of 1 1/4 gallons per 10 square
ly thereafter on the same day, a polyethylene sheeting or

apply an over-all treatment at the rate of 1 gallon per

on walls, and around plumbing dig a narrow trench with a
ow the top of the footing. Apply at the rate of 2 gallon
e soil as it is being replaced in the trench.

the rate of at least 1 gallon per 5 linear feet of wall.

the top of the footing along the inside of foundation
of emulsion per 5 linear feet of trench. The chemical
h. Cover with a layer of soil.

the top of the footing along the outside of the foundation
each foot of depth. A trench 3 feet deep would require
the soil as it is being replaced in the trench and cover

es, and similar situations where slab or fill is at the

the rate of at least 1 gallon per 5 linear feet of wall.

as well as under attached porches, entrance platfo
the grade level. Apply at the rate of 1 gallon per 10
inders, or similar coarse material, increase the dosage
d in part (2) below.

o the top of the footing along the inside of foundation
of emulsion per 5 linear feet of trench. The chemical
h and then cover with a layer of soil.

with a band no wider than six inches, such trench to be
less than 15 inches in depth to the top of the footings,
other 1 gallon per 5 linear feet to the back fill. Cover

an 15 inches in depth to the top of the footings, apply
gallons per 5 linear feet to the back fill. Cover the

a maximum depth required alongside foundations where the
renching to a 30" depth, make the trench 12 to 15" deep
e rate of 1 gallon per 5 linear feet of wall. Apply

The basic principal of termite control is to place an
impregnable barrier between the termites and the build-
ing to be protected. This barrier must be complete,
for termites are quick to seek out unprotected way to
a food supply. A chemical barrier of Dieldrin is most
satisfactory because termites cannot live in or pass
through Dieldrin-treated soil. Dieldrin persists in
the soil for years-giving long protection against re-
infestation.

**WARNING: Hazardous if swallowed, inhaled, or absorbed
through skin! Do not breathe dust or spray mist. Do
not get in eyes, or skin or on clothing. In case of
contact immediately remove contaminated clothing and
flush skin or eyes with plenty of water; for eyes get
medical attention. Wash thoroughly with soap and water
after handling and before eating or smoking; wear clean
clothing. During commercial or prolonged exposure in
spray mixing and loading operations, wear clean syn-
thetic rubber gloves and a mask or respirator of a type
approved by the U.S. Bureau of Mines for Dieldrin pro-
tection. This product is toxic to fish and wildlife.
Do not contaminate water by cleaning of equipment, or
disposal of wastes. Apply this product only as specified
on this label.**

**DO NOT USE, POUR, SPILL, OR STORE NEAR HEAT OR OPEN
FLAME.**

CONTAINER DISPOSAL:
Rinse equipment and containers and dispose of wastes
by burying in non-crop lands away from water supplies.
Containers should be disposed of by punching holes in
them and burying with wastes, or by burning keep out
of smoke.

Buyer assumes all risks of use, storage or handling of
this material not in strict accordance with directions
given herewith.

the inside of foundation
of trench. The chemical

outside of the foundation
feet deep would require
in the trench and cover

the slab or fill is at the
or 5 linear feet of wall.

ches, entrance platfo
rate of 1 gallon per 10
al, increase the dosage

the inside of foundation
of trench. The chemical
soil.

nches, such trench to be
the top of the footings,
to the back fill. Cover
p of the footings, apply
the back fill. Cover the
de doundations where the
e trench 12 to 15" deep

feet of wall. Apply the



TERMITE

KILLS TERMITES

**PROTECTS AGAINST FURTHER
INVASION FOR YEARS**

**WARNING: Keep Out Of Reach Of Children
See Side Panel For Additional Cautions**

AG SUPPLY COMPANY
REGISTERED UNDER THE FEDERAL INSECTICIDE
ACT AND RODENTICIDE ACT
ECONOMIC POISON REGISTER
EPA UNDER NO. 4876

ACTIVE INGREDIENTS	
*DIELDRIN	18.6 %
PETROLEUM HYDROCARBONS	78.4 %
INERT INGREDIENTS	3.0 %
TOTAL	<u>100.0 %</u>

* 15.8% Hexachloroepoxyoctahydro-endo, exo-dimethanonaphthalene
and 2.8% related compounds.

Packaged By
"AG" SUPPLY COMPANY
HOPKINSVILLE, KY. 42240

contact immediately r
flush skin or eyes with
medical attention. Wash
after handling and before
clothing. During comm
spray mixing and loadi
thetic rubber gloves a
approved by the U.S. B
tection. This product
Do not contaminate water
disposal of wastes. App
on this label.

**DO NOT USE, POUR, SP
FLAME.**

CONTAINER DISPOSAL:
Rinse equipment and c
by burying in non-crop
Containers should be d
them and burying with
of smoke.

Buyer assumes all risks
this material not inst
given herewith.