

DIRECTIONS

Add 1 gallon of Heptachlor Emulsifiable to 36 gallons of water (0.5% emulsion). Apply the 0.5% emulsion as follows:

1 - Slab-Type Construction

- a—Apply 1 gallon per 10 square feet as an overall pre-construction treatment under the slab and along attached porches or entrance platforms.
- b—Apply 2 gallons per 5 lineal feet to critical areas under the slab as pre-construction treatment, such as along the inside of the foundation walls and around utility entrances and interior partition foundation walls.

2 - Building With Crawl Spaces

- a—Apply 2 gallons per 5 lineal feet in a trench along the outside of foundation walls, including entrance platforms and porches where the foundation is not more than 15-18 inches deep. If over 15-18 inches deep but not over 30 inches, apply 4 gallons per 5 lineal feet. Do not go deeper than the top of the footing.
- b—Apply 2 gallons per 5 lineal feet as a trenching application to critical areas under the house, such as along the inside of foundation walls and around piers and utility entrances. If trench is deeper than 15-18 inches but not over 30 inches, apply 4 gallons per 5 lineal feet. Do not go deeper than the top of the footing.
- c—Apply 1 gallon per 10 square feet of soil surface as a pre-construction treatment where the attached porches, entrance platforms, utility entrances, etc., have covering slab on fill of ground.


- d—Apply 1 gallon per 5 lineal feet of wall to voids in hollow masonry units of the foundation.

3 - Buildings With Basements

- a—Apply 1 gallon per 10 square feet as an overall pre-construction treatment under the basement flooring, attached porches, entrance platforms, utility entrances, and smaller situations where slab fill is at ground level.
- b—Apply 2 gallons per 5 lineal feet in a trench along the outside of foundation walls, including entrance platforms and porches where the foundation is not more than 15-18 inches deep. If over 15-18 inches deep but not over 30 inches, apply 4 gallons per 5 lineal feet. Do not go deeper than the top of the footing.
- c—Apply 2 gallons per 5 lineal feet as a trenching application to critical areas under the house, such as along the inside of foundation walls, porches, entrances and piers. If trench is deeper than 15-18 inches but not over 30 inches, apply 4 gallons per 5 lineal feet. Do not go deeper than the top of footing.
- d—Treat all voids in hollow masonry units of the foundation at the rate of 1 gallon per 5 lineal feet of wall.

Premises treated with 0.5% heptachlor will give residual control for a minimum of five years.

NET CONTENT
FOR USE BY PEST CONTROL OPERATOR

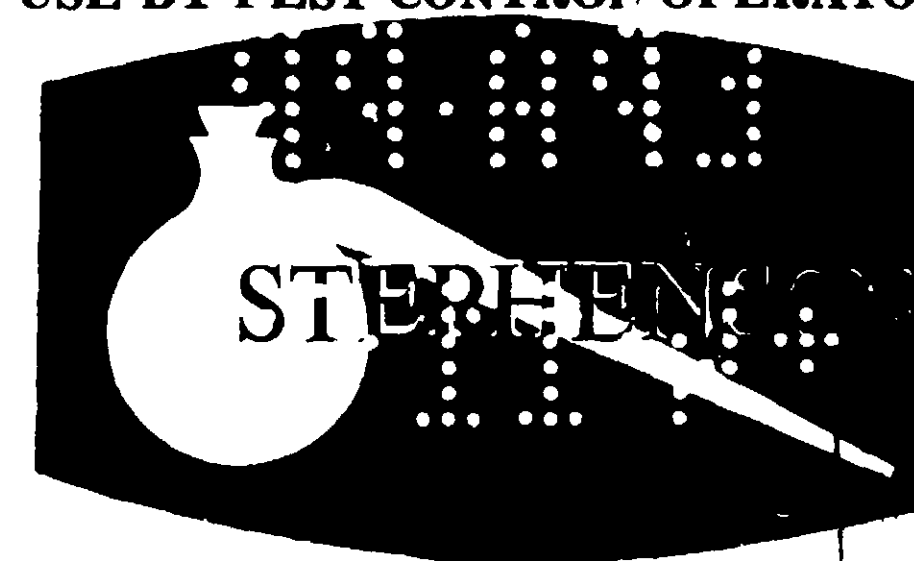

HEPTACHLOR 2 EMULSIFIABLE CONCENTRATE

FOR THE CONTROL OF TERMITES

WARNING: (SEE WARNINGS ON SIDE)
KEEP OUT OF REACH OF CHILDREN

ACTIVE INGREDIENTS:

Heptachlor*	
Related Compounds	
Xylene	
Kerosene	


INERT INGREDIENTS

*Heptachlorotetrahydro-4, 7-methanoindene	Total
(Contains 2 lbs. Technical Heptachlor per gallon, equivalent to 1 lb. Heptachlor plus 1/2 lb. related compounds)	

Manufactured by
STEPHENSON CHEMICAL CO. INC.
COLLEGE PARK, GEORGIA

NET CONTENTS.....

FOR USE BY PEST CONTROL OPERATORS ONLY

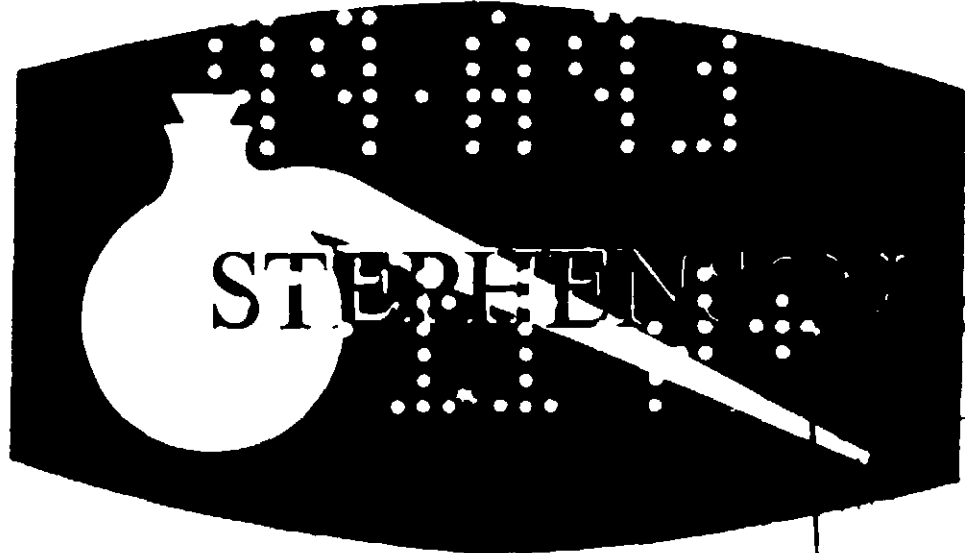

ACCEPTED

May 5-1972

THE FEDERAL BUREAU OF INVESTIGATION
U.S. DEPARTMENT OF JUSTICE

4887-57

WARNING

MAY BE FATAL IF SWALLOWED. DO NOT BREATHE VAPOR, SPRAY OR MIST. DO NOT GET ON SKIN. IN CASE OF CONTACT WASH IMMEDIATELY WITH SOAP AND WATER. DO NOT CONTAMINATE FEED AND FOOD STUFFS.

This product is toxic to fish, wildlife and birds. Keep out of any body of water. Do not contaminate water by cleaning of equipment, or disposal of wastes.

ANTIDOTE

External — In case of spillage on skin, wash promptly with soap and water.

Internal — Emetic of 1 tablespoonful mustard in tumbler of water. Call a physician.

CONTAINER DISPOSAL: Do not reuse empty container. Destroy it by perforating or crushing. Bury in a safe place away from water supplies.

HEPTACHLOR 2 LB. EMULSIFIABLE CONCENTRATE

FOR THE CONTROL OF TERMITES

WARNING: (SEE WARNINGS ON SIDE PANEL)
KEEP OUT OF REACH OF CHILDREN

ACTIVE INGREDIENTS:

Heptachlor*	18.63%
Related Compounds	6.55%
Xylene	35.24%
Kerosene	35.24%
INERT INGREDIENTS	4.34%

*Heptachlorotetrahydro-1, 7-methanoindene Total 100.00%
(Contains 2 lbs. Technical Heptachlor per gallon, equivalent to 1-1/2 lb. actual Heptachlor plus 1/2 lb. related compounds)

Manufactured by
STEPHENSON CHEMICAL CO. INC.
COLLEGE PARK, GEORGIA

Buildings (PCO)