

PETROLITE

**TRETOLITE**<sup>®</sup>  
CHEMICALS & SERVICES

**PETROLITE OIL FIELD CHEMICALS GROUP**

369 Marshall Avenue

St. Louis, MO 63119

PETROLITE CORPORATION

Trademark of Petrolite Corporation

**PRECAUTIONARY STATEMENTS**

**HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

**DANGER:** Harmful or fatal if swallowed. Vapor harmful. Avoid breathing spray mist or vapors. Do not get on skin. Corrosive. Causes eye damage and skin irritations. Do not get in eyes or on clothing. Wear goggles or face shield and rubber gloves when handling. Avoid contamination of food.

**ENVIRONMENTAL HAZARDS**

This pesticide is toxic to fish and wildlife. Do not discharge into lakes, streams, ponds or public waters unless in accordance with an NPDES permit. For guidance contact your Regional Office of the EPA.

**PHYSICAL OR CHEMICAL HAZARDS**

**FLAMMABLE**—Keep away from heat and flame

**FIRST AID**

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse. If swallowed, drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Call a physician immediately. If inhaled, remove immediately to fresh air. If not breathing, apply artificial respiration. If breathing is difficult, give oxygen. Call a physician.

**NOTE TO PHYSICIAN**

Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression and convulsion may be needed.

**X-CIDE<sup>®</sup> 215**  
**Industrial Microbiocide**

FOR USE IN INDUSTRIAL PROCESSES ONLY, NOT FOR DOMESTIC USE

**ACTIVE INGREDIENTS:**

5-Chloro-2-methyl-4-isothiazolin-3-one	1.15%
2-Methyl-4-isothiazolin-3-one	0.35%

**INERT INGREDIENTS**

98.50%  
100.00%

**KEEP OUT OF REACH OF CHILDREN**

**DANGER**

SEE LEFT COLUMN FOR ADDITIONAL PRECAUTIONARY STATEMENTS

EPA REG. NO. 5009-32

EPA EST. NO. 5009-MO-1, CA-1, TX-1

**DIRECTIONS FOR USE**

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

**OILFIELD INJECTION WATERS**

For the control of slime forming bacteria and sulfate reducing bacteria in oilfield waters, slug treat with 67-332 ppm X-CIDE 215 depending on the severity of contamination.

**INITIAL DOSE:** Add 166-332 ppm X-CIDE 215 (6.9-13.9 gallons or 58.0-116.8 pounds X-CIDE 215 per 1000 barrels of water) at a point in the system where it will be uniformly mixed. Repeat treatment after three days or as needed until control is achieved.

**SUBSEQUENT DOSE:** Add 67-166 ppm X-CIDE 215 (2.8-6.9 gallons or 23.5-58.0 pounds X-CIDE 215 per 1000 barrels of water) every seven days or as needed to maintain control. X-CIDE 215 weighs 8.4 lbs. per gallon.

**STORAGE AND DISPOSAL**

**PROHIBITIONS:** This product is corrosive to mild steel. Do not store or transport in unlined metal containers. Do not contaminate food or feed by storage, disposal or cleaning of equipment.

**PESTICIDE DISPOSAL:** Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Representative at the nearest EPA Regional Office for guidance.

**CONTAINER DISPOSAL**

**METAL CONTAINERS:** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

**PLASTIC CONTAINERS:** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.

**GENERAL:** Consult federal, state or local disposal authorities for approved alternative procedures.

55 US GAL AT 60°F

GROSS WT.

51310-4, Mulligan Printing, 10-5-87, de, mcs  
galley 4, disk 1313, HD (tri), 12"

ACCEPTED  
JUN 09 1989  
Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, for the products listed and under EPA Reg. No.

Handwritten mark resembling a stylized 'M' or '2'.

PETROLITE CORPORATION

## PETROLITE OIL FIELD CHEMICALS GROUP

369 Marshall Avenue

St. Louis, MO 63119

Trademark of Petrolite Corporation

## PRECAUTIONARY STATEMENTS

## HAZARDS TO HUMANS AND DOMESTIC ANIMALS

**DANGER:** Harmful or fatal if swallowed. Vapor harmful. Avoid breathing spray mist or vapors. Do not get on skin. Corrosive. Causes eye damage and skin irritations. Do not get in eyes or on clothing. Wear goggles or face shield and rubber gloves when handling. Avoid contamination of food.

## ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish and wildlife. Do not discharge into lakes, streams, ponds or public waters unless in accordance with an NPDES permit. For guidance contact your Regional Office of the EPA.

## PHYSICAL OR CHEMICAL HAZARDS

**FLAMMABLE**—Keep away from heat and flame.

## FIRST AID

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse. If swallowed, drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Call a physician immediately. If inhaled, remove immediately to fresh air. If not breathing, apply artificial respiration. If breathing is difficult, give oxygen. Call a physician.

## NOTE TO PHYSICIAN

Possible unusual damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression and convulsion may be needed.

# X-CIDE® 215


## Industrial Microbiocide

FOR USE IN INDUSTRIAL PROCESSES ONLY. NOT FOR DOMESTIC USE.

## ACTIVE INGREDIENTS:

5-Chloro-2-methyl-4-isothiazolin-3-one	1.15%
2-Methyl-4-isothiazolin-3-one	0.35%

INERT INGREDIENTS:	98.50%
	100.00%

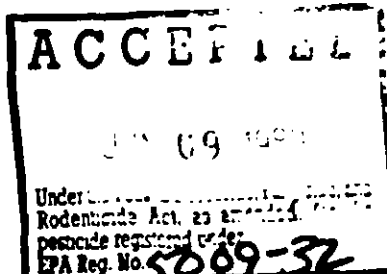

KEEP OUT OF REACH OF CHILDREN

**DANGER**

SEE LEFT COLUMN FOR ADDITIONAL PRECAUTIONARY STATEMENTS

EPA REG. NO. 5009-32

EPA EST. NO. 5009-MO-1; CA-1; TX-1

## INSTRUCTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with labeling.

## Industrial Recirculating Water Cooling Towers:

For the control of bacteria, algae and fungi add X-CIDE 215 to the tower basin, distribution box or some other point insure uniform mixing.

**Initial Dose:** When the system is noticeably fouled apply 2.5 to 7.5 pounds (30 to 82 fluid ounces) of X-CIDE 215 per 1000 gallons of water in the system. Repeat until control is achieved.

**Subsequent Dose:** When microbial control is evident add 1 to 1.9 pounds (19 to 22 fluid ounces) of X-CIDE 215 per 1000 gallons of water in the system weekly or as needed to maintain control. Badly fouled systems must be cleaned before treatment is begun.

## STORAGE AND DISPOSAL

**PROHIBITIONS:** This product is corrosive to mild steel. Do not store or transport in unlined metal containers. Do not contaminate food or feed by storage, disposal or cleaning of equipment.

**PESTICIDE DISPOSAL:** Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Representative at the nearest EPA Regional Office for guidance.

## CONTAINER DISPOSAL:

**METAL CONTAINERS:** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

**PLASTIC CONTAINERS:** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.

**GENERAL:** Consult federal, state or local disposal authorities for approved alternate procedures.

65 U.S. GAL. / 70°F.

GROSS WT

BEST AVAILABLE COPY