

**COLUMN 1**

**KEMSOL**

**BOWL RENOVATOR WITH BLEACH**

**ACTIVE INGREDIENTS**

Hydrogen Chloride.....	23.8300%
Alkyl (60% C <sub>14</sub> , 30% C <sub>16</sub> , 5% C <sub>12</sub> , 5% C <sub>18</sub> ) dimethyl benzyl ammonium chloride .....	0.0425%
Alkyl (68% C <sub>12</sub> , 32% C <sub>14</sub> ) dimethyl ethyl benzyl ammonium chloride .....	0.0425%
<b>INERT INGREDIENTS:**.....</b>	<b>76.0850%</b>
<b>TOTAL.....</b>	<b>100.000%</b>

\*\*Includes cleaning and wetting agents and emulsifiers.

**DANGER POISON**  
**KEEP OUT OF REACH OF CHILDREN**

**STATEMENT OF PRACTICAL TREATMENT**

**IF SWALLOWED:** Promptly drink a large quantity of water. Do not induce vomiting. Call a physician immediately.

**IF INHALED:** Remove the victim to fresh air. Apply artificial respiration if indicated.


**IF ON SKIN:** Wipe off the acid gently. Immediately flood the surface with water, using soap freely; then cover with moist magnesia or baking soda.

**IF IN EYES:** Wash with water for 15 minutes. Get medical attention.

EPA Reg. 5197-34  
EPA Est. 4140 TX-1, In-1

NET CONTENTS: 1 U.S. QUART (0.946 liters)

KEM Manufacturing  
Division of Systems General, Inc.  
P. O. Box 152170  
Irving, Texas 75015-2170

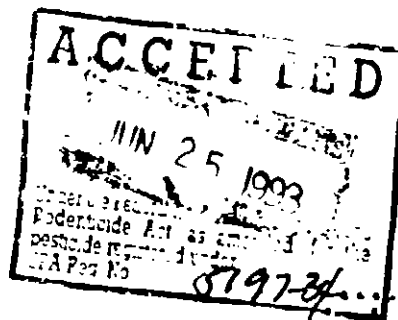

**COLUMN 2**

**DIRECTIONS FOR USE**

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**BEST AVAILABLE COPY**

**TO CLEAN TOILET BOWLS:** It is not necessary to remove water from bowl. Hold mop over bowl, pour on 1 ounce of KEMSOL. Swab entire inside area of bowl. Flush toilet and rinse mop.

**URINALS:** Hold mop over trap. Pour on 1 ounce of KEMSOL. Swab thoroughly, wetting entire surface. Remove screen from trap and pour 1 to 2 ounces around outlet and into drain, swab drain area, replace screen, and flush.

**TO DISINFECT:**

1. Remove water from the bowl by forcing it over the trap with the applicator.
2. Remove excess water from the applicator by pressing it against the side of the bowl.
3. Pour 1 ounce KEMSOL Bowl Renovator with Bleach on the applicator.
4. Clean the entire unit, especially under the rim at the water outlets. Allow to remain 10 minutes.
5. Flush and rinse out the applicator.

A preliminary cleaning is necessary for the removal of gross filth prior to disinfection.

**NOTE:** May be used in systems with septic tank.

**PHYSICAL AND CHEMICAL HAZARDS**

**IMPORTANT:** Do not use or allow to splash on porcelain-coated steel or chrome-plated fixtures, stainless, aluminum or galvanized (zinc) fittings, or on plastic laminates.

**COLUMN 3**

**STORAGE AND DISPOSAL**

Do not contaminate water, food, or feed by storage or disposal.

**Storage:** Keep container closed.

**Pesticide Disposal:** Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility.

**Container Disposal:** Do not reuse container. Rinse thoroughly before discarding in trash.

**PRECAUTIONARY STATEMENTS**

**HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

**DANGER**

**Corrosive:** Causes eye and skin damage. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed.

9M205\*\*