

bioMeT\* ANTIFOULANT NO. 625-24

FOR CONTROL OF MANY MARINE FOULING ORGANISMS

**M&T CHEMICALS INC.**  
SUBSIDIARY OF AMERICAN CAN COMPANY

\*Trademark of M&T Chemicals Inc.

GENERAL  
OFFICES

**RAHWAY, N. J.**

ACTIVE INGREDIENT

tri-n-butyltin resinate ..... 15.4%


INERT INGREDIENTS ..... 84.6%

WARNING! KEEP OUT OF REACH OF CHILDREN  
CAUSES SEVERE EYE BURNS  
MAY BE FATAL IF SWALLOWED  
MAY CAUSE SKIN IRRITATION

Do not get in eyes, on skin, or on clothing.  
Avoid exposure to vapor or spray mist.

Do not use, pour, spill or store near heat or open flame.  
In case of contact, immediately flush eyes with plenty  
of water for at least 15 minutes and get prompt medical  
attention; wash skin with plenty of soap and water.  
Wash contaminated clothing before re-use

Do not re-use empty container. Destroy it by perforating  
or crushing. Bury or discard in a safe place.

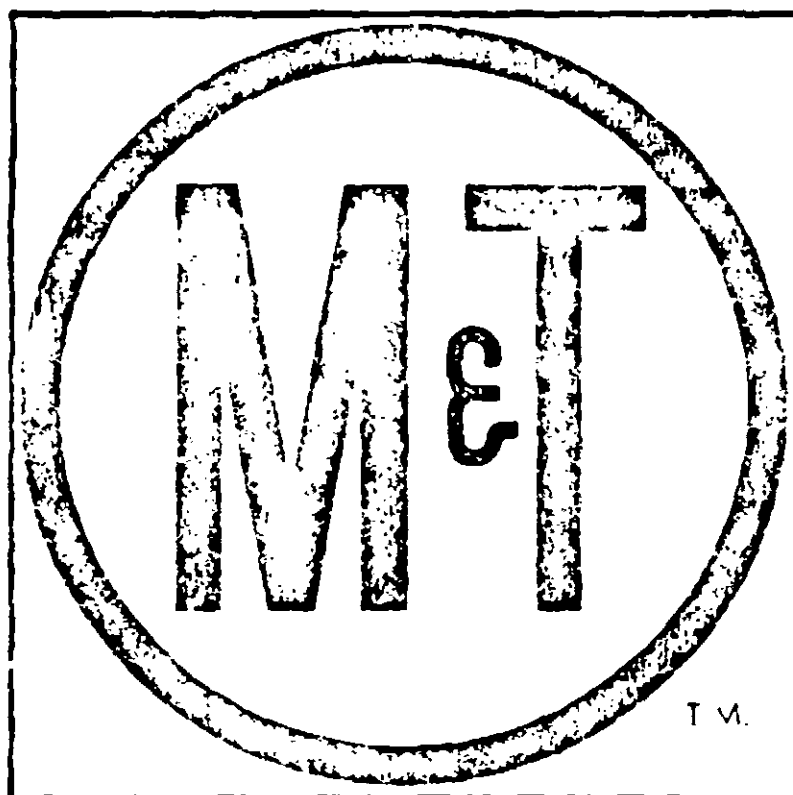

ORGANIC &  
INORGANIC  
CHEMICALS

MINERALS &  
CERAMICS  
PRODUCTS

ORGANIC  
COATINGS  
& INKS

PLATING  
PROCESSES &  
EQUIPMENT

OFFICES IN PRINCIPAL CITIES

**ACCEPTED**

USDA Reg. No. 5204-24

UNDER THE FEDERAL INSECTICIDE  
FUNGICIDE AND RODENTICIDE ACT  
FOR ECONOMIC POISON REGISTERED  
UNDER NO. 5204-24

INSTRUCTIONS FOR USE

bioMeT Antifoulant No. 625-24 is a bottom coating designed for control of many marine organisms. This paint is based on bioMeT Tri-n-butyltin Resinate, a powerful antifouling ingredient developed by M&T Chemicals Inc. It can be applied to wooden, steel, aluminum, and fiberglass hulls and is suitable for fast-moving craft. Recoating is possible in three or four hours, but paint should be allowed to dry overnight before boat launching. Always apply the paint liberally with a full brush or roller.

WOODEN HULLS:


On bare wood apply two full coats directly to the wooden surface. On old work bioMeT Antifoulant No. 625-24 may be applied over clean, dry, firm surfaces provided the previous paint was a vinyl or epoxy type. All other types of paints should be removed to the bare wood.

METAL HULLS:

Unpainted steel or aluminum should be treated with a suitable wash primer. For aluminum this should be followed by two coats of bioMeT Antifoulant No. 625-24. For steel hulls, follow the wash primer coating with two coats of a vinyl anticorrosive and then two coats of bioMeT Antifoulant No. 625-24. For recoating of metal hulls, follow instructions for recoating of wood.

FIBERGLASS HULLS:

Sand new hulls and clean off grit with a suitable solvent such as mineral spirits. Follow this with one coat of an epoxy undercoat. Follow with two coats of bioMeT Antifoulant No. 625-24. For painting over old work, follow instructions for recoating wood.

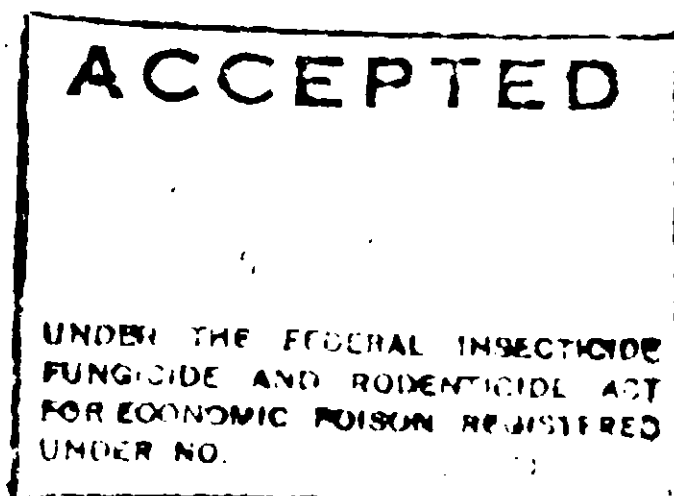

ACCEPTED WITH COMMENTS

bioMeT\* ANTIFOULANT NO 625-18

FOR CONTROL OF MANY MARINE FOULING ORGANISMS



Trademark of M&T Chemicals Inc.

GENERAL OFFICES

RAHWAY, N. J.

ACTIVE INGREDIENT	
tri-n-butyltin resinate .....	11.8%
INERT INGREDIENTS .....	88.2%
Total .....	<u>100.0%</u>

WARNING! KEEP OUT OF REACH OF CHILDREN  
CAUSES SEVERE EYE BURNS  
MAY BE FATAL IF SWALLOWED  
MAY CAUSE SKIN IRRITATION

Do not get in eyes, on skin, or on clothing.  
Avoid exposure to vapor or spray mist.


Do not use, pour, spill or store near heat or open flame.  
In case of **contact**, immediately flush eyes with plenty  
of water for at least 15 minutes and get prompt medical  
attention; wash skin with plenty of soap and water.  
Wash contaminated clothing before re-use.

Do not re-use empty container. Destroy it by perforating  
or crushing. Bury or discard in a safe place.



- &  
IC  
ICALS
- MINERALS &  
CERAMICS  
PRODUCTS
- ORGANIC  
COATINGS  
& INKS
- PLATING  
PROCESSES &  
EQUIPMENT

OFFICES IN PRINCIPAL CITIES

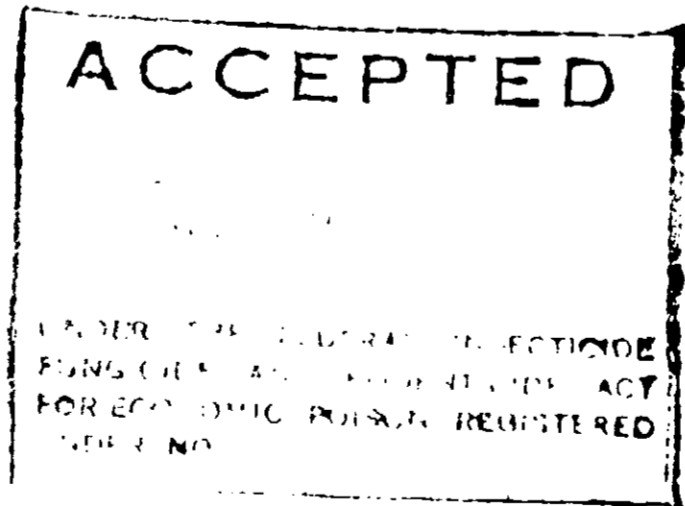

USDA Reg. No. 5204-27