


Subsidiary of Allied Equities Corp.

765 Landess Avenue
P.O. Box 319
Milpitas, California 95035
(408) 262-2020

PRODUCT BULLETIN

Malathion 57-E
Malathion 30% (In Oil)

(EPA Reg. No. 5316-6)
(EPA Reg. No. 5316-9)

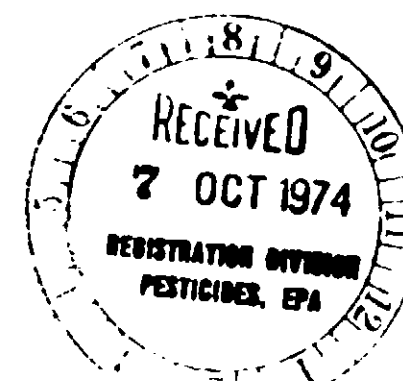

DIRECTIONS FOR USE IN FOOD HANDLING ESTABLISHMENTS:

(Places other than private residences in which exposed food is held, processed, prepared, or served.)

APPLICATIONS WITHIN FOOD AREAS LIMITED TO CRACK AND CREVICE TREATMENT ONLY. Includes receiving, serving, storage (dry, cold, frozen, raw), packaging (canning, bottling, wrapping, boxing), preparing (cleaning, slicing, cooking, grinding), edible waste storage, enclosed processing systems (mills, dairies, edible oils, syrups), and serving areas (when food is present or facility is in operation).

Apply as a pinpoint spray a small amount of a 3% malathion solution (consult table below for dilution directions) directly into cracks and crevices-expansion joints between different elements of construction or between equipment bases and the floor, wall voids or hollow equipment legs where Cockroaches, Crickets, Ants, Spiders and Silverfish may hide. [When necessary to treat electrical distribution facilities and equipment for effective control of the above insect pest, treat only with Malathion 30% or 57-E in oil. Do not use Malathion 57-E in water in these areas due to shock hazard. Prior to treatment de-energize circuits and do not re-energize until the material has thoroughly dried to minimize the danger of ignition of the material by sparks produced during operation of the equipment.] This material may also be used as an aid in controlling the following Pantry Pests which may come in contact with the material: Saw-tooth Grain Beetle, Confused Flour Beetle, Rice Weevil, Cigarette Beetle, Drugstore Beetle and Indian Meal Moth. Care should be taken to avoid depositing the product onto exposed surfaces or introducing the material into the air. Avoid contamination of food or food processing surfaces.

APPLICATIONS OF THIS PRODUCT IN THE FOOD AREAS OF FOOD HANDLING ESTABLISHMENTS, OTHER THAN AS A CRACK AND CREVICE TREATMENT, ARE NOT PERMITTED.

APPLICATION IN NON-FOOD AREAS LIMITED TO SPOT APPLICATION ONLY. Includes garbage rooms, lavatories, floor drains (to sewers), entries and vestibules, offices, locker rooms, machine rooms, boiler rooms, garages, mop closets, storage (after canning or bottling) and serving areas (when no food is present and facility is not in operation).

Apply 3% malathion solution as a coarse spray or apply with a paint brush to base-board areas, around water pipes, surfaces behind and beneath sinks, lockers, tables, pallets and similar areas where insects listed above may hide or through which they may enter.

DILUTION DIRECTIONS (for a 3% malathion spray):

For a water based spray: Mix 6 1/2 fl. oz. of Malathion 57-E with sufficient water to make one gallon of spray mixture.

For an oil based spray: Mix 10 1/4 fl. oz. Malathion 30% (In Oil) with kerosene, or 5 1/8 fl. oz. Malathion 57-E with a 1 to 4 mixture of aromatic solvent and kerosene, to make gallon of spray mixture.

REFER TO THE PRODUCT LABEL FOR ADDITIONAL DIRECTIONS AND PRECAUTIONS

— OBSERVE THESE CAREFULLY

NAMCO® trademark of NAMCO CHEMICALS