

PRODUCT BULLETIN

NAMCO Chlordane 72% Emulsifiable	(EPA Reg. No. 5316 5)
NAMCO Chlordane 45% Emulsifiable	(EPA Reg. No. 5316 4)
NAMCO Chlordane 74% (In Oil)	(EPA Reg. No. 5316 13)
NAMCO Chlordane 20% (In Oil)	(EPA Reg. No. 5316 7)

DIRECTIONS FOR USE IN FOOD HANDLING ESTABLISHMENTS:

(Places other than private residences in which exposed food is held, processed, prepared, or served.)


APPLICATIONS WITHIN FOOD AREAS LIMITED TO CRACK AND CREVICE TREATMENT ONLY. Includes receiving, serving, storage (dry, cold, frozen, raw), packaging (canning, bottling, wrapping, boxing), preparing (cleaning, slicing, cooking, grinding), edible waste storage, enclosed processing systems (mills, driers, edible oils, syrups), and serving areas (when food is present or facility is in operation).

Apply as a pinpoint spray a small amount of a 2% chlordane solution (consult label for dilution directions) directly into cracks and crevices expansion joints between different elements of construction or between equipment bases and the floor, wall voids or hollow equipment legs where Cockroaches, Crickets, Ants, Spiders and Silverfish may hide. (When necessary to treat electrical distribution facilities and equipment for effective control of the above insect pest, *treat only with Chlordane 74% or 20% in oil*. Do not use Chlordane 72% or 45% Emulsifiable in water in these areas due to shock hazard. Prior to treatment de-energize circuits and do not re-energize until the material has thoroughly dried to minimize the danger of ignition of the material by sparks produced during operation of the equipment.) Care should be taken to avoid depositing the product onto exposed surfaces or introducing the material into the air. Avoid contamination of food or food processing surfaces.

APPLICATIONS OF THIS PRODUCT IN THE FOOD AREAS OF FOOD HANDLING ESTABLISHMENTS, OTHER THAN AS A CRACK AND CREVICE TREATMENT, ARE NOT PERMITTED.

APPLICATION IN NON-FOOD AREAS LIMITED TO SPOT APPLICATION ONLY. Includes garbage rooms, lavatories, floor drains (to sewers), entries and vestibules, offices, locker rooms, machine rooms, boiler rooms, garages, mop closets, storage (after canning or bottling) and serving areas (when no food is present and facility is not in operation).

Apply a 2% chlordane solution as a coarse spray or apply with a paint brush to baseboard areas, around water pipes, surfaces behind and beneath sinks, lockers, tables, pallets and similar areas where insects listed above may hide or through which they may enter.

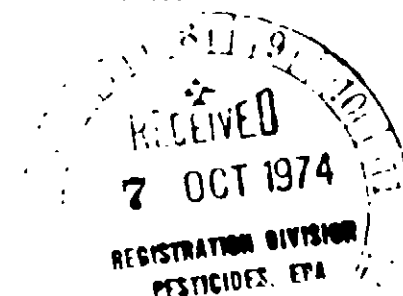

REFER TO THE PRODUCT LABEL FOR ADDITIONAL DIRECTIONS AND PRECAUTIONS

— OBSERVE THESE CAREFULLY