

1 GAL. NET



ELEVATORS ATTENTION

For Best Results Follow Directions

HOW TO APPLY

Apply fumigant when bin is being filled during grain turning. Pour fumigant rapidly, directly onto the grain, as it enters the bin. Apply at intervals, so timed that an application is made once for each ten feet of bin height filled. Add an extra 2 to 4 gallons to the first and last 500 bushels entering the bin. Seal the bin after treatment and do not move the treated grain for at least 72 hours. Best results are obtained if treated grain is left in bin as long as possible. AVOID TOXIC GASES, DO NOT ENTER BIN DURING OR AFTER TREATMENT. Inspect treated wheat every month for signs of reinfestation and re-treat as needed.

AVERAGE DOSAGE TABLE

Gallons Per 1,000 Bushels Grain

Type Bin	Wheat, Rye, Oats	Corn
Steel and Concrete	2	5
Wooden	4	7

INCREASE DOSAGE

- For Slow Bin Filling Time
- For High Moisture Grain
- For High Dockage
- For High Foreign Matter

BOXCAR TREATMENT

Avoid contamination during transit. Treat loaded cars of grain before shipment with 2 to 3 gallons per car. Level grain surface before treatment. Apply fumigant as evenly and quickly to grain surface as possible. Seal car and allow 48 hours for results.



NOTICE TO BUYER

Our recommendations for use of this product are based upon tests believed to be reliable. The use of this product being beyond the control of the manufacturer, no guarantee, expressed or implied, is made as to the effects of such or the results to be obtained if not used in accordance with directions or established safe practice. The buyer must assume all responsibility including injury or damage, resulting from its misuse, as well as contamination with other materials.

Vulcan



TIME-TESTED FORMULA FORTIFIED WITH 6.6% ETHYLENE DIBROMIDE

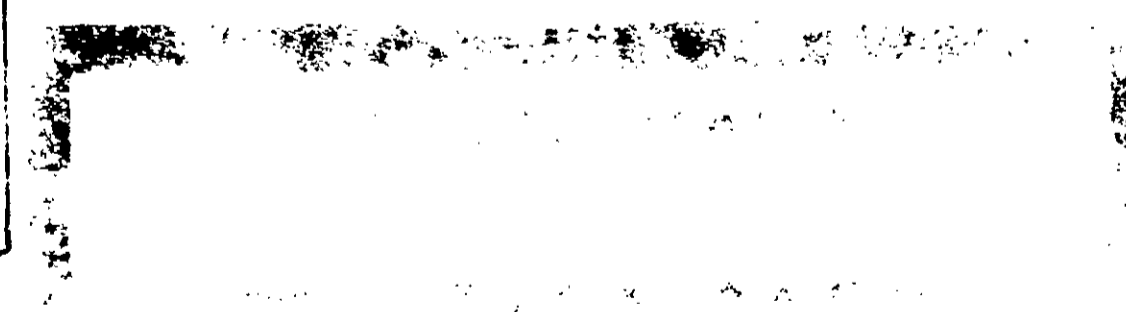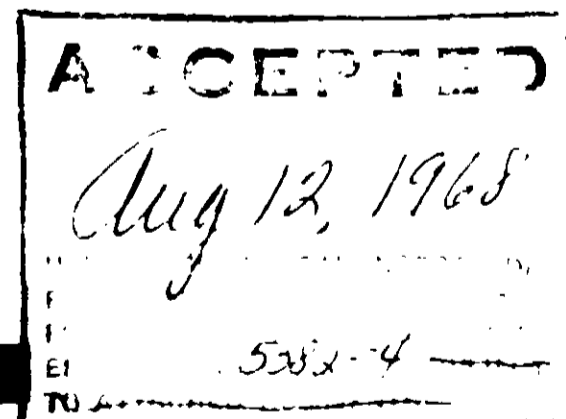

Effective against: TAGGS of Grain Weevil, Rice Weevil, Lesser Grain Borer, Corn Earworm, Indian Meal Moth, Grain Moth Larva, Indian Meal Moth Larva, Mediterranean Flour Moth Larva, Black Carpet Beetle, Sawtooth Grain Beetle and certain other insects on grain.

ACTIVE INGREDIENTS: 100%

Carbon Disulfide 12.1%, Ethylene Dibromide 87.9%

MANUFACTURED BY

Vulcan Materials Company

CHEMICALS DIVISION • P. O. BOX 545 • WICHITA, KANSAS 67201



UL SAFETY FORM 1-64 GRAIN FUMIGANT

ATTENTION FARMERS

For Best Results Follow Directions

BEFORE FUMIGATION

FIRST Make the bin gas-tight. Close all cracks and openings in floor and walls of bin. Caulk or tighten, by nailing strips of wood, over all holes or cracks. Paper, if needed, with asphalt type building paper on either outside or inside of bin. Grain fumigants work best when bin is gas-tight. **SECOND** Remove all moldy or crusted layers from the surface of stored grain. Level grain surface and keep surface at least 6 inches below wall top.

HOW TO APPLY

Apply fumigant directly to the grain surface in a very wet, coarse fan-shaped stream. A fast, uniform distribution of fumigant over the entire grain surface gives best results. If possible, apply fumigant from outside of bin to avoid toxic fumes. Seal bin after treatment and keep sealed. Inspect monthly for signs of reinfestation and re-treat as needed. Do not enter bin without an airline respirator or a full-face gas mask with a black canister for protection against organic vapors.

AVERAGE DOSAGE TABLE

Gallons Per 1,000 Bushels Grain

Type Bin	Wheat, Rye, Oats	Corn
Steel and Concrete	2	5
Wooden	4	7

Do not breathe vapors or spray mist. Avoid contact with skin, eyes, and clothing. If spilled on skin or eyes, wash thoroughly with water. Remove clothing and shoes if wet with fumigant. Do not get fumigant on food. May be fatal if swallowed or inhaled.

Store in a cool place. Keep container closed. Keep out of reach of children. Keep liquid away from flames, spark-producing equipment or heated surfaces. Do not remove label.

Remove victim to fresh air immediately. Lay victim down, keep warm and quiet and call a physician. If fumigant is swallowed, call physician and induce vomiting.

Use proper gas mask canister (black for organic vapors) at all times when fumigating, including transferring fumigant. If exceptionally high concentrations (exceeding 10% by volume) are encountered, air or oxygen equipment should be used. Do not enter bin during or after treatment. Do not reuse empty container. Return to dry, clean condition.