

On washed gravel, cinders, or similar coarse material, increase dosage to 1 gallon per 7 square feet.

On pretreat jobs, treated soil beneath concrete foundation slabs should be covered with polyethylene sheeting or other waterproof material if:

- the concrete slab is not poured shortly thereafter on the same day,
- there are no foundation cinder blocks or bricks already installed.

This precaution will ensure that treated soil will not be washed away by rain following treatment but preceding pouring of the slab.

WARNING

HAZARDOUS IF SWALLOWED, INHALED OR ABSORBED THROUGH SKIN. Do not breathe vapor or spray mist. Do not get in eyes, on skin or on clothing. Do not use or store near heat or open flame.

Wash thoroughly with soap and water after handling and before eating or smoking. Wear clean clothing. During commercial or prolonged exposure in spray-mixing and loading operations, wear clean rubber gloves and a mask or respirator of a type passed by the U.S. BUREAU OF MINES for dieldrin protection.


In case of spillage on person or clothing, remove clothing immediately and flush skin or eyes with plenty of water: for eyes get medical attention. If swallowed, induce vomiting immediately and get medical attention.

Do not apply or allow to drift to areas occupied by unprotected humans or beneficial animals. Do not contaminate feed and foodstuffs.

This product is toxic to birds, fish and other wildlife. Keep out of lakes, ponds and streams. Do not apply in any manner not specified on the label.

Manufactured for
Farmingdale Garden Laboratories, Inc.
Farmingdale, L. I., N. Y. 11735

E.P.A. REG. No. 3605-141

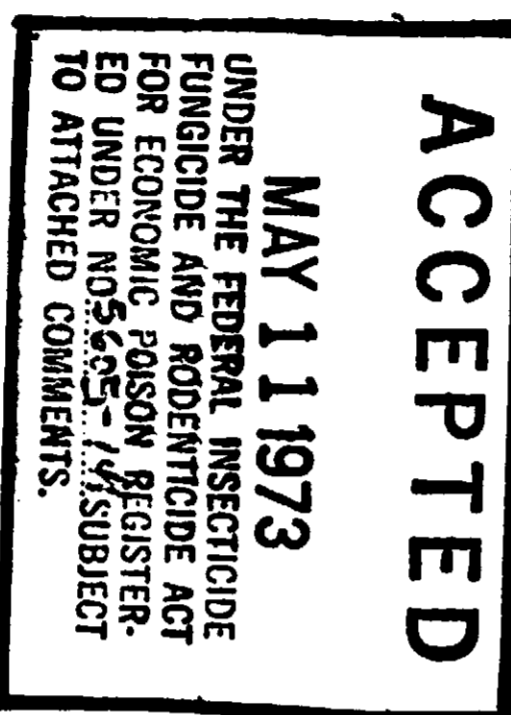

WARNING: Keep out of reach of children.

SEE OTHER WARNINGS ON SIDE PANEL

NET CONTENTS 1 GALLON



EC DIELDRIN TERMITE PROOFER

FOR SUBTERRANEAN TERMITES

ACTIVE INGREDIENTS

Dieldrin*
Heavy Aromatic Naptha

INERT INGREDIENTS

By Weight

18.6%

76.4%

5.0%

TOTAL 100.0%

*Equivalent to 15.8%W Hexachloroepoxyoctahydro-endo, exo-dimethanonaphthalene and 2.8%W of Related Compounds.

One gallon dilutes with water to treat 75 linear feet of full foundation wall or 150 linear feet of slab construction wall. One gallon treats 600 square feet of graded area before pouring slab or basement floor.

DESTROY USED CONTAINERS. Empty contains as thoroughly as possible, then crush and bury.

Read the Directions Carefully and Follow Them at All Times

DIRECTIONS FOR TERMITE PROOFING

DILUTION: Mix 1 gallon with 60 gallons of water (8 fluid ounces in 3¾ gallons of water). Agitate frequently while using to assure uniformity.

Along the outside of foundation walls, the termite proofing should be applied to the soil within six inches of the wall. A trench dug for this application should be no wider than six inches, exposing wall to a depth of 15 inches. For deep foundations, dig trench to a maximum depth of 30 inches or make 1 inch holes 15 inches deep at 8 inch intervals in the bottom of a 15 inch trench. **DO NOT DIG BELOW FOOTINGS.** If the depth of the trench to the top of the footings does not exceed 15 inches, apply 1 gallon of dilute solution to each 5 linear feet of trench. Replace the soil and repeat the 1 gallon per 5 linear feet treatment to the back fill. Apply 1 gallon per 5 linear feet to the bottom of the 30 inch trench or double that to the bottom of a 15 inch trench with additional 15 inch holes. Repeat the application of 1 gallon per 5 linear feet to each 10 inch depth of the back fill. Cover treated area with thin layer of soil. Treat all voids in hollow masonry units and other points of entry such as pipes and conduits.

For buildings or portions of buildings with only a crawl space, treat only the areas under the house such as along inside walls, around sewer pipes and conduits. Use 2 gallons of dilute solution per 5 linear feet of trench as directed above. The object is to establish a treated soil barrier which will prevent termite entry. Other critical areas may also require treatment. It is suggested that you consult the STATE EXTENSION SERVICE for advice.

PRE-SLAB TREATMENT: Apply one gallon of dilute material to each 10 square feet as an overall treatment under the slab and basement floor, as well as under attached porches and entrance platforms. Make application to the graded area.