

FARBOIL



June 1970

**SUPER TROPICAL
ANTIFOULING
1260**

ACTIVE INGREDIENT
Cuprous Oxide 22.2%
INERT INGREDIENTS 77.8%
100.0%

CAUTION: Harmful if
swallowed.
DIRECTIONS FOR USE
1260 is applied to ship's bottom
by brush, roller or spray.
FOR PROFESSIONAL USE
ONLY IN SHIPYARDS
USDA Reg. No. 5633-1


NET CONTENTS:
Five U.S. Gallons 4.725 Imperial Gallons
18.925 Liters

FARBOIL COMPANY, BALTIMORE, MARYLAND 21222, U.S.A.

CAUTION: SEE SIDE PANEL FOR
CAUTION STATEMENT

NET CONTENTS 5 U.S. GALLONS

FARBOIL

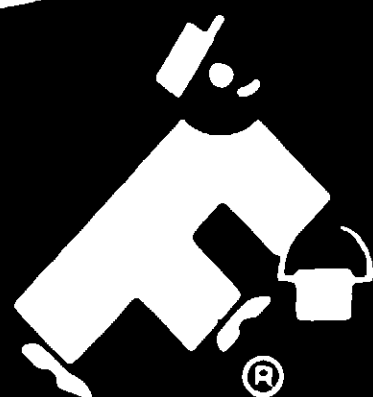

DIRECTIONS

PREPARATION OF SURFACE: FARBOIL is a solvent type paint and will not adhere to any surface unless it is first prepared.

APPLY TO EVERY SURFACE

FARBOIL is a solvent type paint and will not adhere to any surface unless it is first prepared.

PAINTING: Brush or spray FARBOIL on the surface to be painted. Allow to dry thoroughly before applying a second coat.

STIR PAINT THROUGHLY FROM THE BOTTOM

ALL FARBOIL PAINTS ARE

IMPORTANT

RECEIVED
JUN-8-1976

KEEP AWAY FROM FIRE OR OPEN FLAME

FARBOIL COMPANY
A DIVISION OF BEATRICE
BALTIMORE
MARYLAND 21222, U.S.A.



BOSTON • NEW YORK • PHILADELPHIA • WASHINGTON • NORFOLK • CHARLESTON
JACKSONVILLE • NEW ORLEANS • MOBILE • MIAMI • TAMPA • HOUSTON
GALVESTON • PORTLAND • SEATTLE • SAN DIEGO • SAN PEDRO • SAN FRANCISCO
LONDON • PARIS • HAMBURG • PIRAEUS • ROTTERDAM • GENOA • NAPLES
TRIESTE • MALTA • HONG KONG • SINGAPORE • BANGKOK • TOKYO

CAUTION!

USE WITH ADEQUATE VENTILATION

Avoid contact with eyes. If contact occurs, flush with water for 15 minutes. Seek medical attention if necessary.

COMBUSTIBLE: Keep away from heat, sparks, open flames, and other sources of ignition. Do not use near fire.

KEEP OUT OF REACH OF CHILDREN.
THE FARBOIL COMPANY, Baltimore, Md.