

... ..  
ACCEPTED



**DANGER!**

**USE WITH ADEQUATE VENTILATION**  
Wear goggles or face shield when using.  
May cause eye damage. Do not breathe spray  
mist.

**COMBUSTIBLE** Keep away from heat and  
open flame. Close container after each use.

**KEEP OUT OF THE  
REACH OF CHILDREN**

# FARBOLIK



**CHLORINATED  
RUBBER  
ANTIFOULING  
58SAF**

ACTIVE INGREDIENT: Tributyl Tin Fluoride  
INERT INGREDIENTS:

81%  
91.9%  
100.0%

**For Professional Use Only in Shipyards**  
To Be Applied To Ship's Bottom By Brush, Roller, or Spray.


**DANGER: KEEP OUT OF REACH OF CHILDREN.**  
Harmful if swallowed. May be absorbed through skin. Causes skin irritation. Do not  
get in eyes, on skin or on clothing. In case of skin contact, remove contaminated  
clothing and immediately wash with soap and water; for eyes, immediately flush with  
water and get medical attention. Wash contaminated clothing before re-use. Do not  
contaminate or store near feed or foodstuffs.

E.P.A. Reg. No. 5633-9

CONTENTS: FIVE U.S. GALLONS

**DANGER:** See Side Panel for  
Caution Statement

# FARBOIL

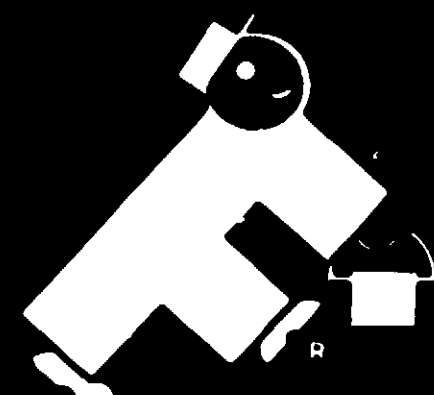

**CHLORINATED  
RUBBER  
ANTIFOULING  
58SAF**

ACTIVE INGREDIENT: Tributyl Tin Fluoride 8.1%  
INERT INGREDIENTS 91.9%

100.0%

**For Professional Use Only in Shipyards**

To Be Applied To Ship's Bottom By Brush, Roller, or Spray.

**DANGER: KEEP OUT OF REACH OF CHILDREN.**

Harmful if swallowed. May be absorbed through skin. Causes skin irritation. Do not get in eyes, on skin or on clothing. In case of skin contact, remove contaminated clothing and immediately wash with soap and water; for eyes, immediately flush with water and get medical attention. Wash contaminated clothing before re-use. Do not contaminate or store near feed or foodstuffs.

E.P.A. Reg. No. 5633-9

**CONTENTS: FIVE U.S. GALLONS**

**DANGER:** See Side Panel for  
Caution Statement

## **FARBOIL**

### **DIRECTIONS**

**Preparation:** Do not apply any Farboil coating until surface is thoroughly cleaned of grease, oil, loose paint, dirt, mildew, rust scale or any other foreign material.

Apply coating to DRY SURFACE.

Farboil primer should be applied to bare or porous surface before painting.

**Painting:** Be sure to mix enough color at one time to do the entire job. If more than one container is used, box together thoroughly for complete color uniformity.

Stir Paint Thoroughly From the Bottom.

Apply Farboil paints by brush, spray or roller.

**IMPORTANT:** If it is necessary to paint under unusual conditions, call your Farboil Company Representative for technical service.

**KEEP AWAY FROM FIRE OR OPEN FLAME.**