



Oil




**UBBER
RED**

..... 3.2%
..... 37.9%
..... 58.9%
..... 100.0%

N

See instructions on the
back of the container for
proper use and disposal.

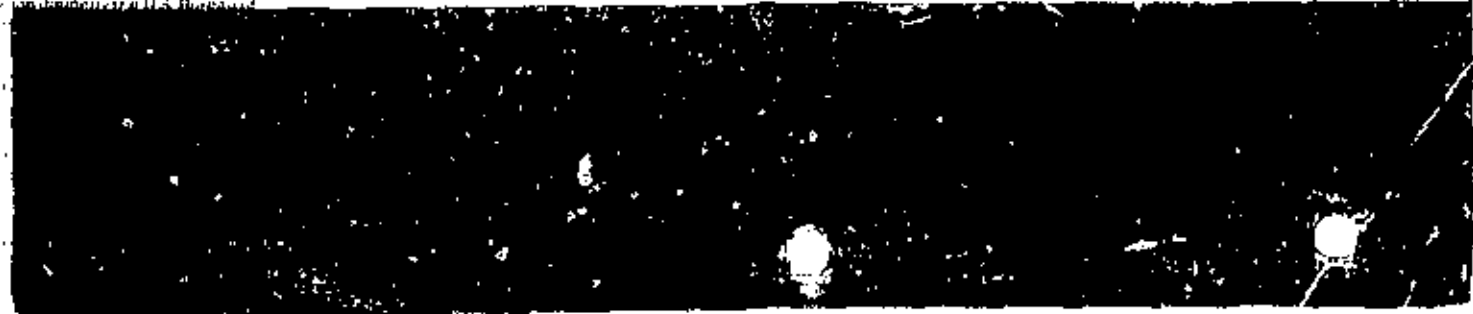

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

Pesticide Disposal:
Pesticide, paint or rinsate that cannot be used according to label instructions must be disposed of according to Federal, State or local procedures under Subtitle C of the Resource Conservation and Recovery Act.

Container Disposal:
Triple rinse (or equivalent) and offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved State and local procedures.

CONTAINS XYLENE

FLAMMABLE

**DO NOT USE OR STORE NEAR
HEAT OR OPEN FLAME**

58SAF5000

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Disposal of paint chips is an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS: Flammable. Keep away from heat and open flame.

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

ANTI-RODENT PAINT FOR METAL SURFACES: To control the attachment of rodent feeding, i.e., burrowing, gnaw, signs, etc., on steel bottoms in salt and brackish water which would retard such growth. Not recommended for use on aluminum. A minimum of two coats is recommended for best performance.

Surface Preparation: Before application of anti-rodent paint, all surfaces must be dry and cleaned of dirt, dust, oil, rust, loose paint, salt residues, and other contaminants. Steel must be coated with a suitable primer or anti-corrosive barrier coats. **Warning:** Before use, pour mix or buy the paint with the product in uniform. Stir the paint at intervals during application to maintain uniformity.

Application: Apply by brush, roller or spray. Do not paint in cold or damp weather. When used over epoxy base coats, the first coat of anti-rodent should be applied while the epoxy is still in a

soft, uncured condition, typically, within 12-16 hours at 75°F (24°C). When this is not practical, apply a tie-coat of 80-20-8 Vinyl Primer, or 82 Series Hi-build Vinyl within this interval. Anti-rodent may then be applied at any later time.

Finishing: This slightly with Primer 7-T-37 when required for application. See Primer 7-T-37 for clean up.

Overcoats: Apply at a rate that will provide a 2 wet dry film per coat, nominally 150 sq. ft. per gallon. Actual coverage will vary depending upon application technique, job conditions and type of surface.

Dry Time: At 75°F and 50% R.H., allow at least 4 hour dry time between coats, and a minimum of 3 hours before refinishing. Moisture exposed to direct sunlight or high temperatures, leaching is recommended no more than 24 hours after application.

STORAGE AND DISPOSAL: **VERTICAL DISPENSER:** Fertilizer, spray mixture or slants that cannot be used according to label instructions, must be disposed of according to Federal or approved state procedures under Subtitle C of the Resource Conservation and Recovery Act.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or burn and dispose of in a sanitary landfill, or by other approved state and local procedures.

MS-115 9-82

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS (& DOMESTIC ANIMALS) (28-1)

CONTAINS ORGANIC SOLVENT

WARNING!

FLAMMABLE

CAUSES EYE IRRITATION

HARMFUL IF ABSORBED THROUGH SKIN

Avoid contact with skin, eyes, or clothing

Wear protective clothing such as gloves, long-sleeved

cotton shirt, long pants, and hat

May be dull if inhaled or inhaled

Do not breathe vapor

When used in enclosed areas, spraying paint or sanding

boot surface, wear a respirator jointly approved by the

Mining Enforcement and Safety Administration and the

National Institute for Occupational Safety and Health

Remove contaminated clothing and wash before reuse

Wash thoroughly with soap and water after handling.



PRACTICAL TREATMENT:

If swallowed: Drink promptly a large quantity of milk, egg white, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

If in eyes: Flush with plenty of water. Get medical attention (28-111). Wash with plenty of soap and water. Get medical attention.

If inhaled: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

SHIPPING NAME: PAINT

HAZARD CLASS: FLAMMABLE LIQUID

HAZARD IDENTIFICATION NUMBER: UN253

Refer to product material safety data bulletin, available upon request, for further safety and handling information.

(ECLA-84 9-82)

BEST DOCUMENT AVAILABLE