

DIRECTIONS FOR USE:

For commercial use only.

6022S MIL-P-15931-D Antifouling Vinyl Type I, Class I, Form 121 is an Antifouling paint suitable for application to steel vessels subject to attack by barnacles, algae, tube worms and other fouling organisms.

Preparation: Do not apply any Farboil coating until surface is thoroughly cleaned of grease, oil, loose paint, dirt, mildew, rust scale or any other foreign material.

Apply coating to DRY SURFACE.

Farboil primer must be applied to bare or porous surface before painting.

Stir Paint Thoroughly From the Bottom.

Apply Farboil paints by brush, spray or roller.

IMPORTANT: If it is necessary to paint under unusual conditions, call your Farboil Company Representative for technical service.

6022S



6022S

Farboil

6022-S MIL-P-15931-D, ANTIFOULING VINYL TYPE I, CLASS I, FORM 121

ACTIVE INGREDIENT: Cuprous Oxide 66.79%
INERT INGREDIENTS: 33.21%
100.00%

CONTAINS PETROLEUM DISTILLATES
KEEP OUT OF THE REACH OF CHILDREN

WARNING

PRECAUTIONARY STATEMENTS

HAZARD TO HUMANS & DOMESTIC ANIMALS

Causes eye irritation. Do not get on skin, clothing or in eyes. Wear a face shield and rubber gloves when handling. Use in a well-ventilated area. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. When used in confined areas or applied by spraying wear a pesticide respirator jointly approved by the Mining Enforcement and Safety Administration (formerly the U.S. Bureau of Mines) and by the National Institute for Occupational Safety and Health under the provisions of 30 CFR 11. May be fatal if swallowed or inhaled. Harmful if absorbed through the skin. Wash thoroughly with soap and water after handling. Do not breathe vapors or spray mist.

PRACTICAL TREATMENT: In case of skin contact remove contaminated clothing and immediately wash skin with soap and water. Get medical attention. Wash contaminated clothing before reuse. If inhaled, remove to fresh air. Use artificial respiration if breathing has stopped. Get immediate medical attention. If swallowed, do not induce vomiting. The product contains petroleum distillates. Get immediate medical attention. If in eyes, flush eyes with water. Get medical attention.

ENVIRONMENTAL HAZARD: This product is toxic to fish and wildlife. Do not apply directly to water. Do not contaminate water by cleaning equipment or disposal of waste. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

CHEMICAL AND PHYSICAL HAZARDS: Do not use near heat or open flame.


FLASH POINT 68 F PAINT LIQUID

E.P.A. REG. NO. 5633-27
E.P.A. EST. NO. 5633-MD

Gallons
Imperial Gallons
Liters

ACCEPTED
JUN 1984

6022-S

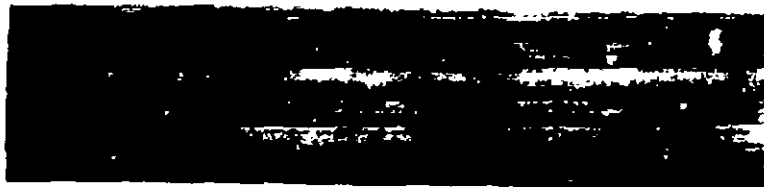

09.09.03

00.00.00

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

Pesticide Disposal:

Pesticide, paint or rinsate that cannot be used according to label instructions must be disposed of according to Federal, State or local procedures under Subtitle C of the Resource Conservation and Recovery Act.

Container Disposal:

Triple rinse (or equivalent) and offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved State and local procedures.

**CONTAINS KETONE
AND XYLENE**

FLAMMABLE

**KEEP AWAY FROM HEAT AND
OPEN FLAME**

6022S



TECHNICAL DATA

Farboil

8200 Fischer Road,
Baltimore, Md 21222
(301) 477-8200

PRODUCT: A.F. VINYL RED FORM. 121
MIL-P-15931

CODE: 6022 S

FOR INDUSTRIAL USE ONLY

GENERAL DESCRIPTION

A heavy duty vinyl antifouling that gives protection for extended periods of time. May be applied and exposed to the air for up to three weeks before immersion. Conforms to Formula 121, MIL-P-15931.

VEHICLE	Vinyl
COLOR & APPEARANCE	Red Matte
VISCOSITY	Heavy
WT/GAL., LBS.	19.9 ± .2
SOLIDS % BY WT.	86%
SOLIDS % BY VOLUME	60%
THEO. COVERAGE FT ² /GAL/MIL	962
FLASH POINT °F/METHOD	68° C.C.
SHELF LIFE UNMIXED	Single package
FILM THICKNESS	
WET	3.3 - 6.6 mils
DRY	2 - 4 mils
REDUCTION	
BRUSH	Small areas only:
CONVENTIONAL	Best applied by spray.
THINNERS - SLOW	SL 36
THINNERS - FAST	SL 21
THINNERS - CLEAN UP	SL 21

5433-27

The manufacturer makes no warranties of merchantability or freedom from patent infringement and there are no warranties which extend beyond the description on the face hereof including any warranty as to fitness for a particular use.

APPLICATION EQUIPMENT
(TYPICAL)

DeVilbiss or equal. MFC Gun, D Needle; use
a pressure pot, 4 Air 1 p.

Airless: Grayco or equal; 30-1 pump, 90 pounds
air; .025-.028 tip.

PROCEDURES

Make sure all pigment is incorporated. Use of
mechanical mixer advisable.

SURFACE PREPARATION
NEW WORK

Must be applied over Anti-Corrosive Vinyl.
Do not apply on non-ferrous metal.

RECOAT

Apply over clean vinyl that does not have any
foreign matter on it.

DRY TIME (HOURS)
(TYPICAL)

Touch 1/4 hr.
Hard 3/4 hr.
Recoat 4 hrs.

Allow final coat 4 hours min. before immersion.

USES

As an antifouling coating.