

SHIP'N SHORE

MARINE FINISHES

ANTI-FOULING

DURA-COP

RED SS-100

ACCEPTED

2-11-69

UNDER THE FEDERAL INSECTICIDE
FUNGICIDE AND FERTILIZER ACT
FOR ECONOMIC PEST CONTROL REGISTERED
ED UNDER NO. 5695-51

CAUTION!

HARMFUL OR FATAL IF SWALLOWED
KEEP OUT OF REACH OF CHILDREN

"See back panel for additional cautions".

Anti-fouling ingredients
Active
Cuprous Oxide 34.90%
Inert 65.10%
100.00%

1 U.S. GALLON



DIRECTIONS

DESCRIPTION

This product is a semi-hard, low sheen, bottom paint that gives effective protection against marine growth. May be used on all types of boats - luxury or utility.

DIRECTIONS

NEW WORK - Remove all dust and grease from surface. For best results apply a prime coat of Marine Red Lead Primer and allow to dry 24 hours. Then apply a coat of this product thinned one pint per gallon with Mineral Spirits, and allow to dry 12 to 24 hours. Apply a second coat without thinning. Allow to dry 8 hours before launching.

OLD WORK - Remove all loose and flaking material by sanding or wire brushing. Spot prime all bare wood or metal with Red Lead Primer. Then apply one or two coats of this product.

HARMFUL IF SWALLOWED.


CAUTION - COMBUSTIBLE

KEEP AWAY FROM HEAT AND OPEN FLAME

Do not take internally. Contains Compounds Harmful if eaten. Keep out of reach of children. Avoid breathing of vapor or spray mist and prolonged contact with skin. Keep container closed when not in use. Use with adequate ventilation.

NET CONTENTS: ONE GALLON U. S. MEASURE

DIXIE PAINT & VARNISH COMPANY, INC. BRUNSWICK, GA.

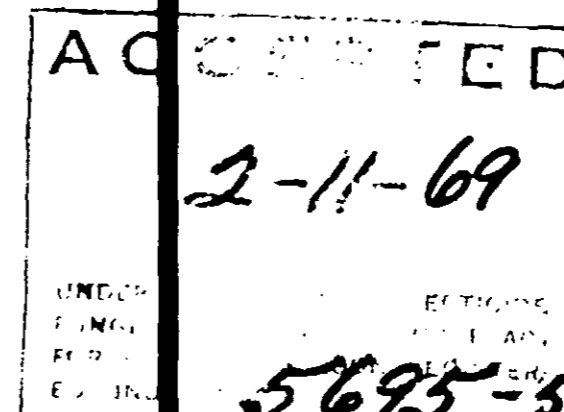

USDA Reg. No. 5695-5

SS-100 Dura Cop Red	
Pigment	51.1%
Cuprous Oxide	68.3%
Red Iron Oxide	3.7%
Magnesium	
Stearic Acid	48.9%
Chalk	
Pitch	14.1%
Rosin	39.3%
Aromatic Hydrocarbons	46.6%
	100.0%
	100.0%

DIRECTIONS

DESCRIPTION

This product is a semi-hard, low sheen, bottom paint that gives effective protection against marine growth. May be used on all types of boats - luxury or utility.

DIRECTIONS

NEW WORK - Remove all dust and grease from surface. For best results apply a prime coat of Marine Red Lead Primer and allow to dry 24 hours. Then apply a coat of this product thinned one pint per gallon with Mineral Spirits, and allow to dry 12 to 24 hours. Apply a second coat without thinning. Allow to dry 8 hours before launching.

OLD WORK - Remove all loose and flaking material by sanding or wire brushing. Spot prime all bare wood or metal with Red Lead Primer. Then apply one or two coats of this product.

HARMFUL IF SWALLOWED.

CAUTION COMBUSTIBLE

KEEP AWAY FROM HEAT AND OPEN FLAME

Contains lead compounds harmful if eaten. Keep out of reach of children. Do not spray into eyes. Wash thoroughly with soap and water if contact occurs. Use only for intended purpose.

NET CONTENTS: ONE GALLON U. S. MEASURE

DIXIE PAINT & VARNISH COMPANY, INC., BRUNSWICK, GA.

2-11-69

5695-5

USDA Reg. No. 5695-5

SS-100 Dura Cop Red	
Pigment	51.1%
Cuprous Oxide	68.3%
Red Iron Oxide	3.7%
Magnesium Silicate	28.0%
	100.0%
Vehicle	48.9%
Cottonseed Pitch	14.1%
Rosin	39.3%
Aromatic Hydrocarbons	46.6%
	100.0%
	100.0%