

SHIP'N SHORE

MARINE FINISHES

ANTI-FOULING

DURA-COP

RED SS-400

ACCEPTED


2-11-69

UNDER THE FEDERAL INSECTICIDE,
FUNGICIDE AND RODENTICIDE ACT
FOR ECONOMIC POISON REGISTRY
ED UNDER NO. 5695-24

CAUTION!

HARMFUL OR FATAL IF SWALLOWED
KEEP OUT OF REACH OF CHILDREN

"See back panel for additional cautions".

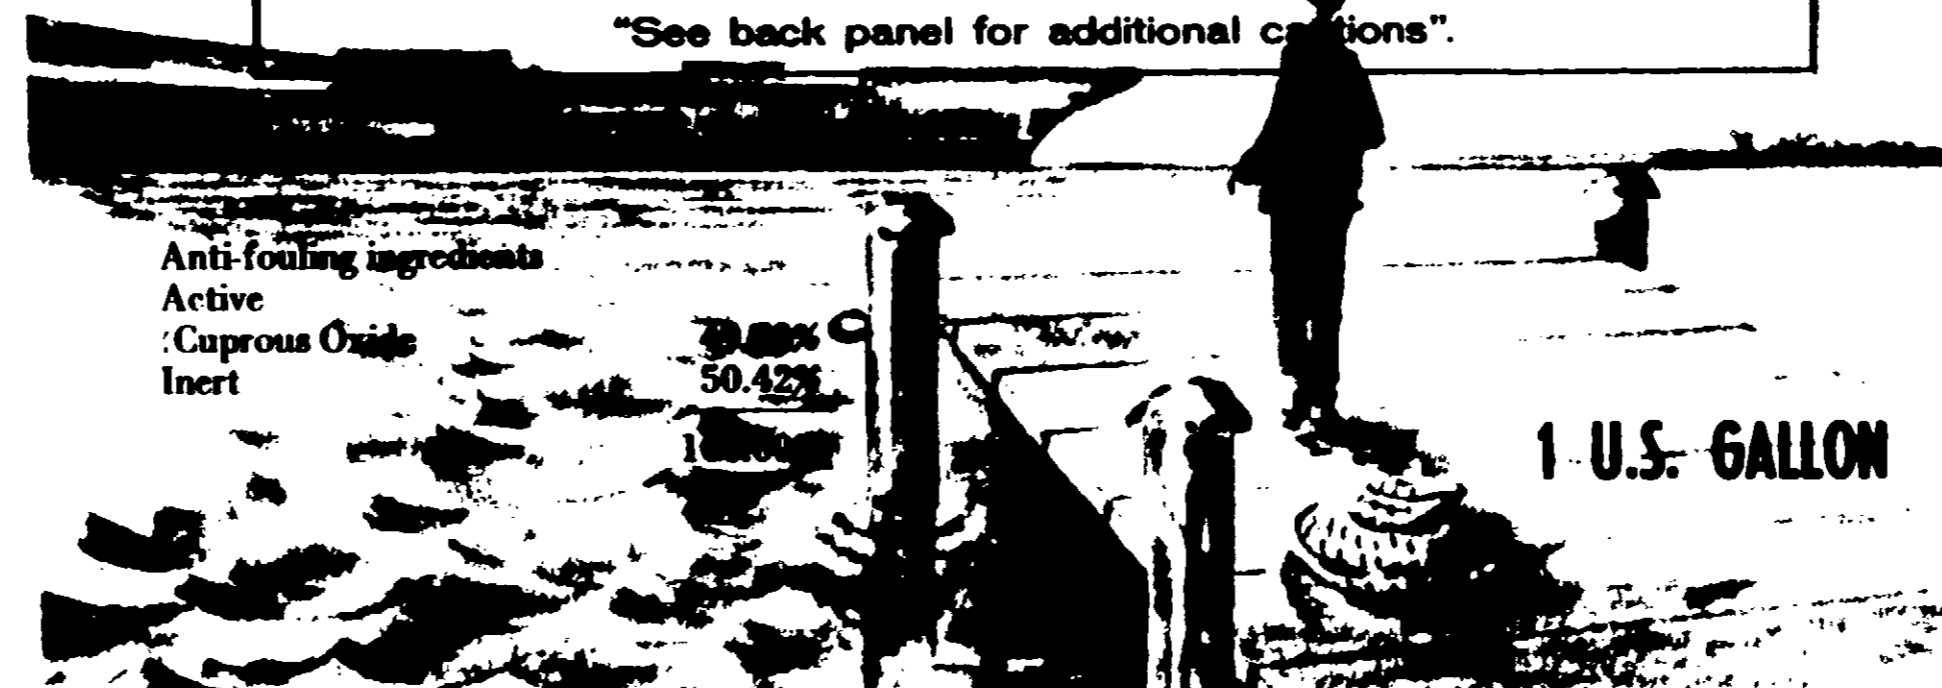

Anti-fouling ingredients
Active
Cuprous Oxide
Inert

50.42%

DIRECTIONS

This product is a matt finish bottom paint that gives the maximum protection against marine growth. The gradual erosion of the film eliminates the necessity of cleaning and repainting the bottom in 3 - 6 months as required by most paints.

NEW WORK - Remove all dust and grease from surface. Apply a prime coat of Marine Red Lead Primer and allow to dry at least 24 hours. Then apply a coat of this product thinned one pint per gallon with Mineral Spirits and allow to dry 12 - 24 hours. Apply a second coat without thinning. Allow to dry eight hours before launching.

OLD WORK - Remove all loose and flaking material by sanding or wire brushing. Spot prime all bare wood or metal with Marine Red Lead Primer. Apply one or two coats of this product.

HARMFUL IF SWALLOWED.

CAUTION - COMBUSTIBLE

KEEP AWAY FROM HEAT AND OPEN FLAME

Do not take internally. Contains Compounds Harmful if eaten. Keep out of reach of children. Avoid breathing of vapor or spray mist and prolonged contact with skin. Keep container closed when not in use. Use with adequate ventilation.

NET CONTENTS: ONE GALLON U. S. MEASURE

DIXIE PAINT & VARNISH COMPANY, INC. BRUNSWICK, GA.

ACCEPTED

2-11-69

5695-6

USDA Reg. No. 5695-6

SS-400 Dura Cop Red

Pigment		79.2%
Cuprous Oxide	62.6%	
Red Iron Oxide	3.1%	
Silicates	3.1%	
Calcium		
Carbonates	10.4%	
	100.0%	
Vehicle		20.8%
Resin	21.1%	
White Refined Linseed Oil	16.7%	
Aromatic Hydro- carbons	50.5%	
Aliphatic Hydro- carbons	11.7%	
	100.0%	100.0%