

Bartel's

REDYCOAT

"BARTEL . . . quality products since 1932"

COPPER-PENTA Wood Preserver

**CAUTION: FLAMMABLE
KEEP OUT OF REACH
OF CHILDREN**

See side panel for
additional cautions.

456

ACTIVE INGREDIENTS:	
Copper Naphthenate (1% copper as metallic)	12.0%
Pentachlorophenol*	2.1%
Other Chlorophenols and Related Compounds4%
Mineral Spirits	83.5%
INERT INGREDIENTS	2.0%
	<hr/> 100.0%

1 GALLON — U. S. MEASURE

GILSONITE, INC., Portland, Oregon

Bartel's

RED

"BARTEL . . .

DESCRIPTION

A most effective, ready to use, wood preservative. Prevents destruction caused by rot, fungi and termites. The green stain color makes it easy to identify treated lumber. Can be painted with little or no bleed through. Use for foundation plates, supports, and structural timbers.

CAUTION—FLAMMABLE. DO NOT USE, POUR, SPILL, OR STORE NEAR HEAT OR OPEN FLAME. Harmful if swallowed, inhaled, or absorbed through skin. May cause skin irritation. Do not breathe vapor or spray mist. Do not get in eyes, on skin, or on clothing. Do not reuse container. Destroy when empty. **ANTIDOTE:** External: Wash with rubbing alcohol followed by soap and water. Internal: Call a physician immediately. Drink warm water mixed with tablespoon of salt, milk or egg white to force vomiting. Lie down; keep warm.

KEEP OUT OF REACH OF CHILDREN

EPA Reg. No. 5831-3
EPA Est. 5831-OR-1

"BARTEL . . . Quality Products Since 1932"



Made in U.S.A.

CO

WOOD

**CAUTION: FLAMMABLE
KEEP OUT OF REACH
OF CHILDREN**

**See side panel for
additional cautions.**

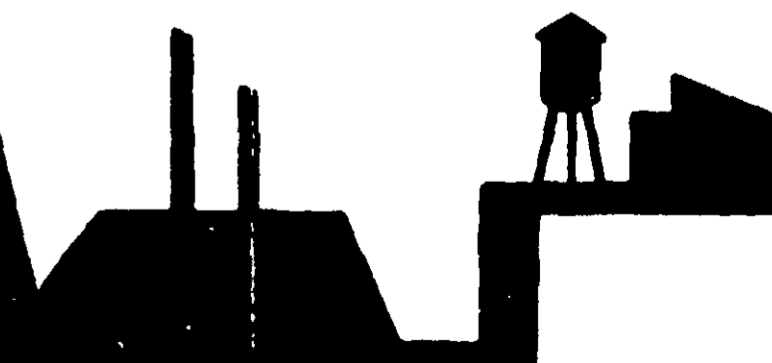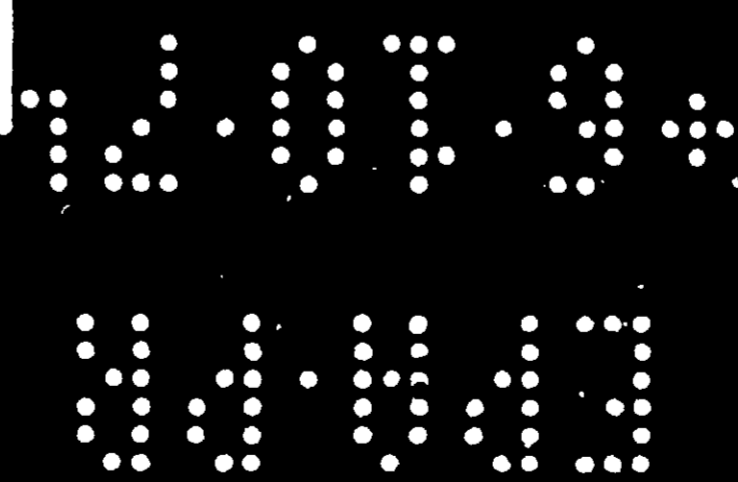

el's DYCOAT

ARTEL . . . quality products since 1932"

COPPER-PENTA ood Preserver

ABLE
ACH
or
ns.

456


ACTIVE INGREDIENTS:

Copper Naphthenate (1% copper as metallic)	12.0%
Pentachlorophenol*	2.1%
Other Chlorophenols and Related Compounds4%
Mineral Spirits	83.5%
INERT INGREDIENTS	2.0%
	100.0%

1 GALLON — U. S. MEASURE



GILSONITE, INC., Portland, Oregon

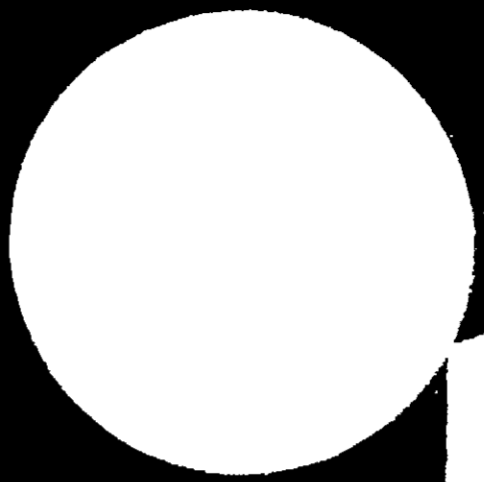

APPLICATION

Stir or shake thoroughly to mix con
Soak wood for a minimum of three
utes or apply, liberally, two or more
coats. All possible surfaces shou
covered, especially those to be in co
with the soil, joints and end grains.
to be treated should be dry and free
bark. For best penetration, use at
peratures above 70 degrees F. At le
hours drying time should be allowe
fore application of top coats. Fence
should be soaked in preservative for
48 hours.

For protection against termites
wood prior to use in construction.
protective clothing and rubber g
when handling the freshly treated lu
This product is toxic to fish and w
Do not contaminate water by clean
equipment or disposal of wastes.

CONDITION OF SALE

Seller makes no warranty, expres
implied, concerning the use of this
uct other than indicated on the
Buyer assumes all risk of use a
handling of this material when suc
and/or handling is contrary to lab
structions.