

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND
DOMESTIC ANIMALS**

WARNING!

**HARMFUL OR FATAL IF SWALLOWED,
INHALED OR ABSORBED THROUGH THE SKIN
CAUSES EYE AND SKIN IRRITATION.
KEEP AWAY FROM HEAT OR FLAME.**

Do not get in eyes, on skin or clothing. Do not breathe vapor or spray mist. Wear rubber gloves and protective clothing when applying or handling freshly treated articles. Remove and wash contaminated clothing before reuse. Wash hands and exposed areas of the body thoroughly after using. Use only with adequate ventilation.

ENVIRONMENTAL HAZARDS

This product is toxic to fish and wildlife. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes.

PHYSICAL OR CHEMICAL HAZARDS

Nu-Lastic Wood Preservative contains Pentachlorophenol and Petroleum Distillate. Keep contents and freshly treated articles away from heat, flame, food and living plants. Do not use on wood where there will be repeated human exposure or contact with food or feed items.

DIRECTIONS FOR USE

*A violation of Federal law to use this product in a manner inconsistent with its labeling.

STORAGE AND DISPOSAL

STORAGE: Do not use or store inside the home. Keep closures tight and upright to prevent leakage. Keep container closed when not in use. Do not reuse empty container.
DISPOSAL: Wrap empty container and dispose of in trash collection.

Non-Photochemically Reactive

M.A.B. PAINTS • PHILADELPHIA PA • ORLANDO FL • TERRE HAUTE IN

**Nu-Lastic
WOOD PRESERVATIVE**

Nu-Lastic Wood Preservative is for exterior use only. It prevents the swelling, shrinking, warping, splitting and grain raising caused by moisture penetration. It also protects wood against termites and certain other wood destroying insects and prevents fungus growth that causes rot and stain.

SURFACE PREPARATION


New wood, millwork and other lumber products should be thoroughly dry before applying Nu-Lastic Wood Preservative. Fence post and foundation timbers should be dry, well seasoned and free from bark.

APPLICATION DIRECTIONS

Millwork: Dip three (3) minutes for each inch of thickness.
Other Lumber Products: Dip three (3) minutes or apply two (2) or more saturation coats by brush or roller, particularly where wood will contact the soil.
Fence Posts and Foundation Timbers: Immerse in Nu-Lastic Wood Preservative for at least 12 hours. For maximum effect allow 48 hours immersion.

Note: Allow wood to dry thoroughly before painting or varnishing. Normally, 48 hours dry is sufficient.

- REDUCES PAINT FAILURE
- IDEAL SEALER FOR NEW WOOD
- GIVES LONG, PROTECTIVE SERVICE

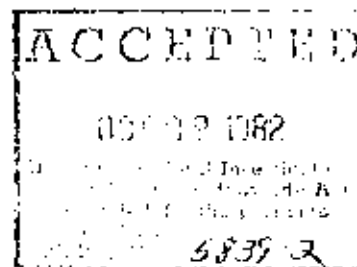

56-0982-5

QUALITY



SINCE 1899

Nu-Lastic

Wood Preservative

U.S. EPA Reg. No. 5839-2
EPA EST. No. 5839-PA-1

WOOD PRODUCTS

TREAT WITH

NU-LASTIC WOOD PRESERVATIVE

Exterior Window Sash

Exterior Doors

Aluminum Trim

Roof

Shingles

Exterior Siding

Exterior Trim

Shingles

Roofs

Timbers

Exterior Moldings

89-022

ONE GALLON

128 FL. OZ. (3.785 LITERS)

**KEEP OUT OF REACH OF CHILDREN
WARNING!**

MEETS OR EXCEEDS

GOVERNMENT SPECIFICATION

TT-W-572 B

Meets all of the requirements for
the Millwork Treatment Standards
of the National Woodwork Manu-
facturers Association.

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED:

Call a physician or Poison Control Center. Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger, or, if available, by administration of ipecac. Do not induce vomiting or give anything by mouth to an unconscious person.

IF INHALED:

Remove to fresh air.

IF ON SKIN:

Wash thoroughly with soap and water.

IF IN EYES:

Immediately flush with plenty of water for at least 15 minutes and get medical attention.

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.