



HIGHEST *Quality*

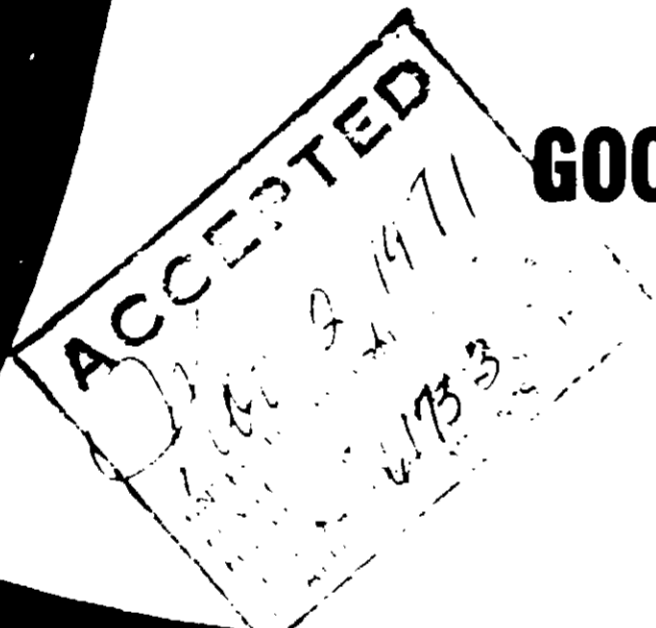

GOODYEAR PENTA WOOD PRESERVER

Pentachlorophenol	4.4%
Other Chlorophenols	.6%
Inert Ingredients	95.0%

WARNING!
KEEP OUT OF THE REACH OF CHILDREN
See Other Warnings On Back Panel

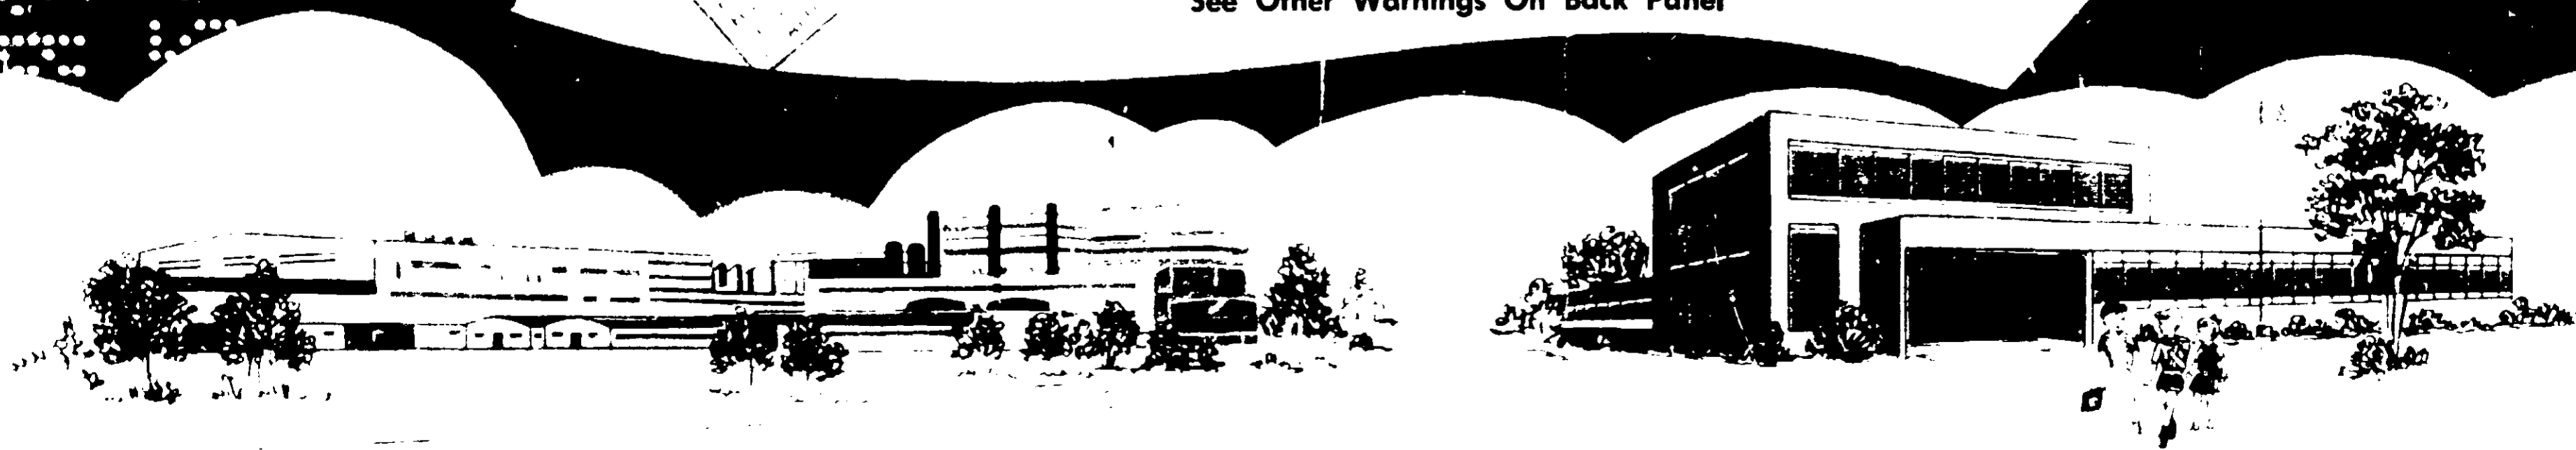

PAINTS AND WATERPROOFING COMPOUNDS FOR INDUSTRY, INSTITUTIONS AND GOVERNMENT

ST Quality

PENTA WOOD PRESERVER

Pentachlorophenol	4.4%
Other Chlorophenols	.6%
Inert Ingredients	95.0%



WARNING!
OUT OF THE REACH OF CHILDREN
Other Warnings On Back Panel



1.5 GALLON
MEASURE

UNDS FOR INDUSTRY, INSTITUTIONS AND GOVERNMENT

USDA Reg. No. 6173-3

WARNING

Harmful if swallowed or absorbed through skin! Causes skin irritation! Do not breathe vapor or spray mist. Do not get in eyes, on skin or on clothing. Wash thoroughly with soap and warm water after handling. **KEEP AWAY FROM CHILDREN.** Keep away from heat and open flame. Keep container closed when not in use. Wear rubber gloves and protective clothing when handling the freshly treated lumber.

DIRECTIONS

Goodyear Penta Wood Preserver is used to protect wood against fungal decay or rot.

Stir thoroughly or shake well to mix contents before using. Apply liberally with a paint brush, paint spray gun or dip wood into the liquid and allow to soak at least 5 minutes. Post and heavy timbers should be free of bark, dry, well seasoned and should be dipped for 12 to 48 hours, or receive two or more free flowing coats of preservative. Will penetrate best at temperatures above 70 F. Permit treated material to dry at least 24 hours before handling or painting.

This product is toxic to fish and wildlife. Keep out of lakes, streams or ponds. Do not contaminate water by cleaning of equipment, or disposal of wastes. Do not reuse container. Destroy when empty.



CONSOLIDATED

