

## Can Be Painted Over

This solution is effective for preventing destruction of wood due to mold, fungi or insects. Protects wood against swelling, warping and checking due to rapid change in moisture content. When properly applied, the wood retains a natural appearance with a minimum of discoloration. For proper termite control, treatments should be made after all cuts are made and before use in the structure.

Do not breathe vapor or spray mist. Do not get in eyes, on skin or on clothing. May cause skin irritation. Keep away from foodstuffs, children, pets and livestock.

To remove from skin, clean covered area with gasoline or other petroleum solvents, then wash with plenty of soap and warm water. In case of swallowing, induce vomiting by administering emetic; call a physician.

"HARMFUL IF SWALLOWED. HARMFUL IF ABSORBED THROUGH SKIN. WASH THOROUGHLY AFTER HANDLING."

**KEEP OUT OF REACH OF CHILDREN**

# PIONEER

*Brand.*

## 5% PENTA WOOD PRESERVING COMPOUND WITH WATER REPELLENT


### CAUTION

KEEP OUT OF REACH OF CHILDREN  
SEE WARNING ON LEFT PANEL

#### ADDITIONAL CAUTIONS

ACTIVE INGREDIENTS  
\*Pentachlorophenol . . . . . 4.3%  
Other Chlorophenols and  
Related Compounds . . . . . 0.9%  
Mineral Spirits . . . . . 78.8%  
INERT INGREDIENTS . . . . . 16.0%

\*Contains 5.2% Pentachlorophenol as defined in Federal Specification TT-W-570

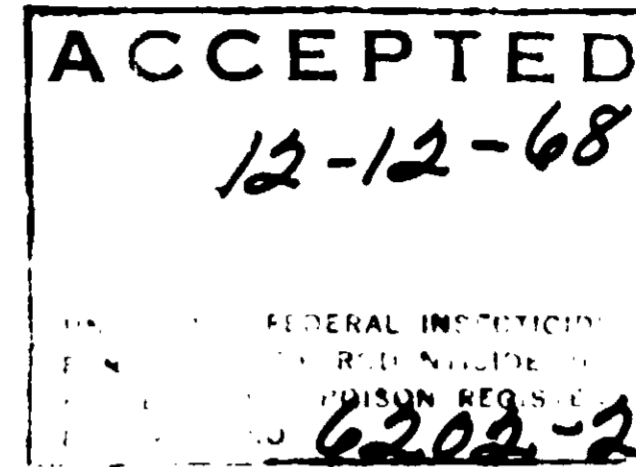

#### DIRECTIONS

Shake well or stir thoroughly to mix contents. Apply two or more brush coats or dip for a minimum of three minutes on all wood which is to be in contact with the soil. Material to be treated should be dry and free of bark. Will penetrate best at temperatures of above 70 degrees F.

DISTRIBUTED BY

**PIONEER BUILDING SPECIALTIES CO.**

1125 S. E. DIVISION ST.  
PORTLAND, OREGON

CONTENTS: **ONE GALLON**  
U. S. MEASURE

USDA Reg. No. 6202-2