


DIRECTIONS: To wash walls, floors, tables, woodwork, refrigerators, bathroom fixtures and garbage cans, mix one ounce DS-33 per gallon of water. To disinfect, mix 2½ ounces of DS-33 per gallon of water for non-porous surfaces. For porous surfaces mix 3 ounces DS-33 per gallon of water. Apply with mop, sponge, brush or spray. Return empty container to manufacturer.

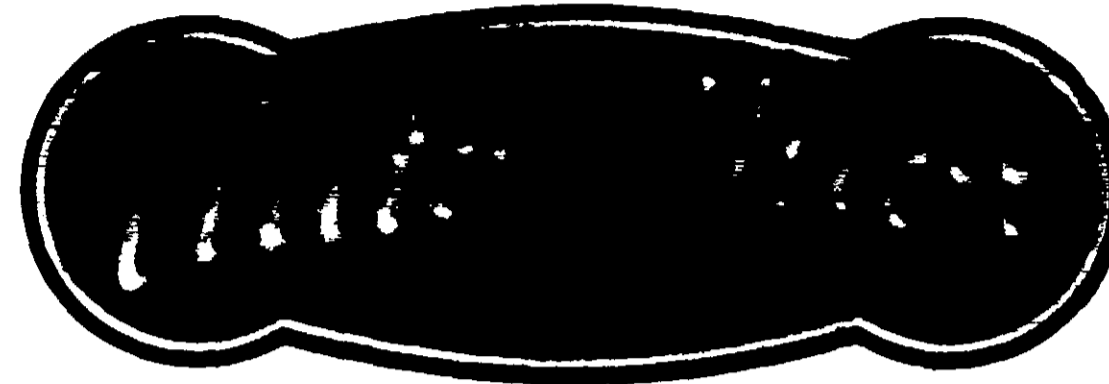

DS-33

A CLEANSER AND A DISINFECTANT ESPECIALLY PREPARED FOR USE IN HOSPITALS, NURSING HOMES AND INSTITUTIONS

DANGER

Keep Out of Reach of Children.

Causes severe eye and skin damage. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.

FIRST AID

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse.

If swallowed, drink promptly a large quantity of milk, egg whites, gelatin solution, or if these are not available, drink large quantities of water. Avoid alcohol. Call a physician immediately.

NOTE TO PHYSICIAN


Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression and convulsions may be needed.

AUTO-CHLOR SYSTEM MEMPHIS, TENNESSEE

Active ingredients n-alkyl
(50% C14, 40% C12, 10% C16)
dimethyl benzyl ammonium chlorides 4.25%
Inert ingredients..... 95.75%
Includes compatible detergent.
Total..... 100.00%

Net contents -- One gallon

EPA Reg. No. 6243-3-AA

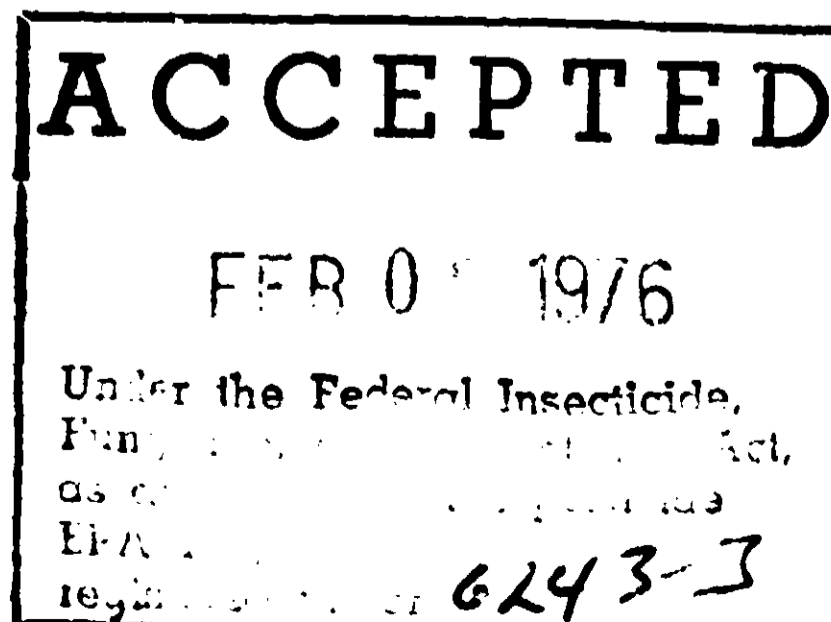

ACCEPTED WITH COMMENTS