



STERI-TIZED
 INC.
 W. ST.
 BUCHANAN, N.Y. 10511
 PEekskill 7-8266

technical data

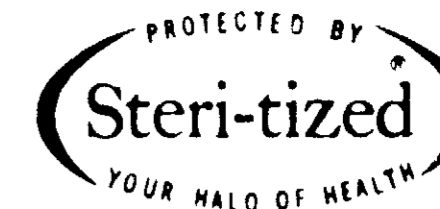

STERI-TIZED OL-30

XXXXXXXXXXXXXXXXXXXXXXXXXXXX

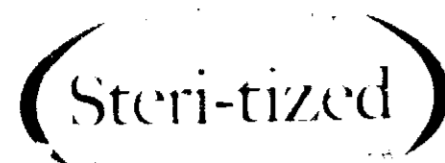

301

ACCEPTED by


GRIFFIN
CHEMICAL CORPORATION
 115 N. WATER STREET, PEEKSKILL, N. Y.

UNDER THE FEDERAL INSECTICIDE ACT
 AND THE FEDERAL FOOD, DRUG AND COSMETIC ACT
 OF 1938
 MAY 1 1961

FOR MANUFACTURING USE ONLY

ACTIVE INGREDIENTS: Phenyl mercuric oleate
INERT INGREDIENTS:

CAUTION: This product is toxic and must be handled carefully. Contact of concentrate with skin even for short periods may result in skin irritations. Wash hands promptly with cold water directly after handling. In the event of burning or blistering, treat the affected parts after washing with a strong brew of tea. Do not use oils or greases. In all severe cases call doctor at once. Keep concentrate away from foods, humans, pets and livestock.



PRODUCT: STERI-TIZED OL-30 is a product especially designed, scientifically controlled and carefully manufactured for the purpose of giving your paint the most effective mildew resistance possible. This assures you of the highest quality mildew resistant paint additive available.

Phenyl mercuries have gained wide acceptance as mildew inhibitors for paint. STERI-TIZED OL-30 is a superior formulation of phenyl mercurial which is compatible and stable in a broad range of oil, alkyl and certain oleo-resinous coatings and some latex and water based. Years of research have gone into developing STERI-TIZED OL-30 to give you the best and most consistent fungicidal effects.

This product will not adversely affect viscosity, drying, color or other characteristics of your paint.

USES: PAINT MILDEW INHIBITOR. The amount of STERI-TIZED OL-30 to use varies with the basic paint formulation. On an average, 0.1% of STERI-TIZED OL-30, based on the total weight of the paint, is recommended. Adequate mildew resistance of particular paint formulations can often be accomplished at lower levels to 0.1%. Therefore, laboratory studies should be conducted to establish optimum concentration and compatibility.

SPECIFICATIONS: PROPERTIES

	STERI-TIZED OL-30
Phenyl Mercury Oleate	30%
Minimum Equivalent Mercury	10.77
Specific Gravity	0.995 - 1.005
Pounds per gallon	7.8 - 7.9
Flash Point (tag closed cup)	145° F.
Maximum Color, Gardner	5
Maximum water content	0.1%
Clarity	Free from suspended matter
Solubility	Completely soluble in Petroleum Solvents Mineral Spirits
Volatiles	

CAUTION: May be fatal if swallowed. May produce delayed chemical burns. Do not get in eyes. In case of contact: wash skin with soap and water. For eyes: flush with water for at least fifteen minutes and get medical attention.

The efficacy of this chemical is not warranted by the producer for any particular use, although such use is known, and Buyer assumes all responsibility, including injury or damage resulting from its use as such, or in combination with other materials.