

PM 34

6557-17

12/17/99

page 1 of 3

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

DEC - 7 1999

Joseph E. Roberts
Coronado Paint® Company
308 Old County Road
Edgewater, Florida 32132-0308

Dear Mr. Roberts:

Subject: Notification of PR Notice 98-10 additional brand name
Coronado Exterior Preservative Wood Stain
EPA Registration No. 6557-17
Amendment application of November 16, 1999

This will acknowledge receipt of your notification, "for additional brand name" submitted under the provisions of FIFRA section 3 (c) 9. Based on a review of the material, the following comment apply.


Additional Brand Name:

MAXUM Semi-Transparent Stain and Wood Preservative

This application is acceptable and has been made a part of the records for this file.

If you have any question concerning this letter, please contact Portia Jenkins at (703) 308-6230.

Sincerely yours,

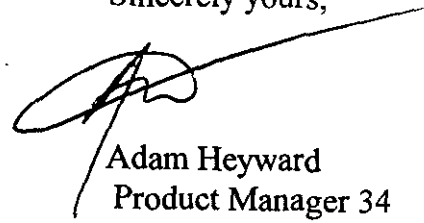

Adam Heyward
Product Manager 34
Regulatory Management Branch II
Antimicrobials Division (7510C)

CONCURRENCES							
SYMBOL							
SURNAME							
DATE							

NORDIK STAIN BASE

Penetrating Wood Preservative

Repels Moisture—Retards Dry Rot—Reduces Warping Penetrates Deeply—Natural Appearance

Directions for use. General Classification

NOTE: It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

PRODUCT DESCRIPTION:

Nordik Exterior Penetrating Preservative Stain Base may be used either as a clear wood preservative or when tinted, as a semi-transparent stain that allows natural wood grain and texture to show through beautifully. Nordik Preservative Stain protects the natural wood fibers and repels damaging moisture. When tinted into a stain, Nordik screens out harmful ultra-violet light, which can damage wood integrity and cause graying.

WHERE TO APPLY:

Use for exterior applications only. Can be applied to new or unsealed wood surfaces such as siding, shakes, shingles, decks or fencing. Nordik Preservative Stain is not intended for below grade use or on structural members. Do not use on abraded plywood. Smooth planed clapboard or siding must be sanded thoroughly to break the "mill glaze" to allow proper adhesion. Avoid contact with skin and food products.

SURFACE PREPARATION:

Surface to be coated must be clean and dry. All dirt, dust, mildew or any other contamination must be removed. If mildew is present, remove it by washing with a solution of one part liquid bleach and three parts water followed by a thorough clean water rinse. Allow surface to dry. Do not prime. Nordik Preservative Stain is self-priming. Do not apply to surfaces that were previously painted, as the stain cannot penetrate.

APPLICATION:

Mix thoroughly before and during application. Nordik Preservative Stain may be applied by brush, roller, spray, dipping or pad at up to 250 square feet per gallon. Surface porosity and texture will dictate actual rate. The final color will vary depending on the type of wood, its grain, color and texture. Stain a test panel to determine actual finished appearance. Apply stain liberally; the more stain absorbed into the wood the greater the protection. Always maintain a wet edge during application to avoid lap marks. Prior to staining, ensure having enough stain boxed or mixed in one container to complete an entire section. Stain when temperatures are between 50°F and 100°F. Do not apply if rain is threatening. Do not apply in direct, hot sunlight. This product may injure plants if spilled or dripped.

SPREAD RATE:

Up to 250 square feet per gallon, per coat, depending on wood texture and porosity.

DRY TIME:

Dries to touch in 2 to 4 hours. May be recoated in 8 to 12 hours. Allow 24 hours before using the surface for walking, such as on decks and patios.

INGREDIENT

Linseed Oil
Alkyd Resin
Mineral Spirits
Silica
Organoclay

92-1927

CAS. NO.

67746-08-1
Proprietary
8052-41-3
63231-67-4
68911-87-5

This product contains a maximum of 550 grams of VOC/VOS per liter of coating. (4.60 pounds per gallon)

THINNING:

Thinning is not recommended.

CLEAN UP:

Clean application tools with mineral spirits.

MILDEW:

Mildew is a natural phenomenon over which we have no control and although every effort is made to make this coating mildew resistant, we cannot assume responsibility for the formation of this fungus on the paint film.

LIMITED WARRANTY:

We guarantee your satisfaction with this product when applied according to label instructions. If not satisfied with performance, return the unused portion with your receipt to the place of purchase. You will either receive replacement material or a refund of the original purchase price. This limited warranty does not include the cost of labor. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

CAUTIONS

Precautionary statements - Hazards to humans and domestic animals. Harmful if inhaled. Avoid breathing spray mist, vapor, or dust. While spraying, sanding or blasting, wear a mask or pesticide respirator approved by the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash clothing before reuse.

Caution: Keep out of reach of children. Contains Petroleum distillate. Harmful or fatal if swallowed. Use only in well ventilated areas. Do not use or store near heat or open flame. Do not get in eyes, or on skin or clothing! Wear rubber gloves and protective clothing when applying or handling freshly treated lumber. Treated wood should not be used where it can come into contact with food, feed, livestock, or potable water.

FIRST AID: If on skin, remove excess with clean dry cloths and then wash thoroughly with soap and water. Remove and wash contaminated clothing before reuse. If in eyes, immediately flood with water for fifteen minutes. Call physician. If swallowed, do not induce vomiting. Drink promptly a large quantity of milk, egg whites, or gelatin solution, if these are not available, drink large quantities of water. Call a physician. **IF INHALED:** Remove victim to fresh air. If not breathing, give artificial respiration, preferable mouth-to-mouth. Get medical attention.

ENVIRONMENTAL HAZARDS: This product is toxic to fish and wildlife. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes.

PHYSICAL AND CHEMICAL HAZARDS: Avoid storage near feed or food products. Do not use or store inside the home. Do not use or store near heat or open flame.

STORAGE AND DISPOSAL INSTRUCTIONS:

Do not reuse empty container. Wrap empty container and put in trash collection. Store in well ventilated area at temperatures not in excess of 90°F.

DANGER - Rags, steel wool or waste soaked with Nordik Exterior Preservative Wood Stain may spontaneously catch fire if improperly discarded. Immediately after each use, place rags, steel wool or waste in a sealed water-filled metal container.

KEEP OUT OF REACH OF CHILDREN

9/99

**KEEP OUT OF REACH
OF CHILDREN
CAUTION!
COMBUSTIBLE (Flash Point 104°F)
SEE BACK PANEL FOR
ADDITIONAL PRECAUTIONARY
STATEMENTS.**

EPA Reg. No. 6557-17
EPA Est. No. 06557-FL-01

Active Ingredient:

Folpet, N-(Trichloromethylthio)	
Phthalimide	.75%
Distannozane, Hexabutyl,	
[Bis(Tributyltin) Oxide]	.81%
Inert Ingredients	98.44%
	100.00%

Contains Petroleum Distillate

Weight per gallon 7.08 ± 0.20 lbs.



92.1927.1



Manufactured by
coronado paint company


EDGEWATER, FL U.S.A. • ELK GROVE, IL U.S.A. • SCHERTZ, TX U.S.A.

S. B. E.

ido



coronado

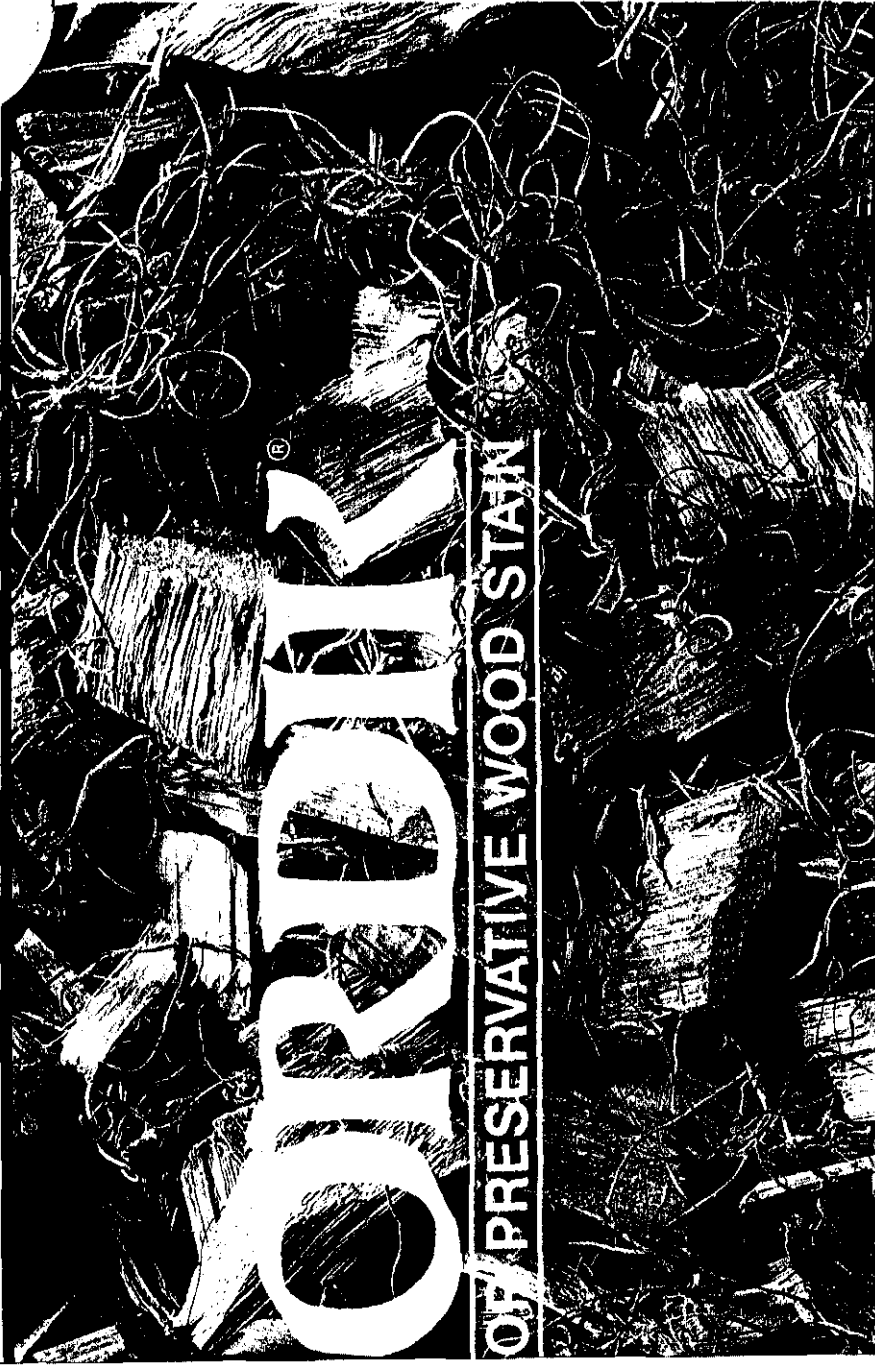

2-1927 CLEAR (TINT BASE)

120 U.S. FLUID OUNCES
3.548 LITERS

3 2 3