

# INDUSTRIAL WATER TREATMENT

## DIRECTIONS FOR USE:

Apply industrial water treatment when the system is in jeopardy of becoming affected or after cleaning systems whose efficiency is already impaired.

**Initial Dose:** 1-2 gallons of industrial water treatment (8.3 to 16.6 pounds) to each 5,000 gallons of water contained in system. Repeat until control is evident.

**Periodic Dose:** When microbial control is evident, add 1 to 3 quarts (2.075 to 6.225 pounds) of industrial water treatment to each 5,000 gallons of water contained in the system every 7 days or sooner should visible growth appear.

Apply industrial water treatment at a point in the system where the product will be uniformly mixed.

For best results, clean heavily contaminated systems before treatment with this product. If soap or anionic detergent is used, rinse thoroughly before charging with industrial water treatment.

Do not be alarmed with the sudden appearance of organic debris in the system during the first week of operation. This is normal and is a good indication that industrial water treatment has effectively penetrated and dislodged dead organic material which tenaciously adheres to metal and wooden surfaces as living matter. This debris should be removed from the system to avoid clogging of screens and pipes.

**WARRANTY STATEMENT:** Buyer assumes all risks of use, storage or handling of this product not in strict accordance with directions given herewith.

# INDUSTRIAL WATER TREATMENT

CONCENTRATED SLIMICIDE FOR INDUSTRIAL  
RECIRCULATING WATER COOLING TOWERS.  
HELPS KEEP WATER COOLING TOWER SYSTEMS  
CLEAR AND FREE OF VISIBLE ALGAE SLIMES.  
INHIBITS THE GROWTH OF BACTERIA.

## ACTIVE INGREDIENTS:

n-Alkyl (60% C <sub>14</sub> , 30% C <sub>16</sub> , 5% C <sub>12</sub> , 5% dimethyl benzyl ammonium chlorides . . . . .	5%
n-Alkyl (68% C <sub>12</sub> , 32% C <sub>14</sub> ) dimethyl ethylbenzyl ammonium chlorides . . . . .	5%
INERT INGREDIENTS: . . . . .	90%
	<hr/> 100%

**DANGER: KEEP OUT OF REACH OF CHILDREN.  
SEE RIGHT SIDE PANEL FOR FURTHER CAUTIONS.**


E.P.A. REG. NO. 6621-46

NET CONTENTS 1 GALLON (8.3 lbs. per gallon)

MANUFACTURED BY

**EAGLE CHEMICAL COMPANY**

2819 WEST LAKE STREET  
CHICAGO, ILLINOIS 60612

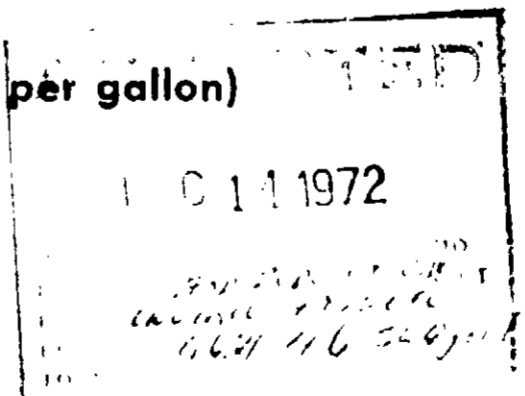

When industrial water treatment is used as directed, it will aid in controlling and or preventing the development of unsanitary slime conditions which are unsightly, produce foul odors and which are often the cause of equipment breakdown.

Industrial water treatment is compatible with virtually all corrosion inhibition additives, but should not be used in the presence of soap or other anionic detergents. Industrial water treatment at use dilution is non-corrosive to inanimate hard surfaces.

## DANGER:

**KEEP OUT OF REACH OF CHILDREN.**

Causes severe eye and skin damage. Do not get in eyes, on skin or on clothing. Wear goggles or face shield, and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.

## FIRST AID

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash all contaminated clothing before reuse. If swallowed, drink milk, egg whites, gelatin solution, or if these are not available, drink large quantities of water. Call a physician.

Rinse empty container with water and discard.

**FISH AND WILDLIFE CAUTION:** This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds or public water.